

2008 ENGINE**Engine Mechanical (3.0L) - Outlander****GENERAL INFORMATION**

The 6B31 (3.0L) engine is a 6-cylinder engine. The cylinder numbers are assigned as 1-3-5 for the right bank and 2-4-6 for the left bank from the front of the engine (timing belt side). This engine is fired in the order of 1-2-3-4-5-6 cylinders.

GENERAL SPECIFICATION

ITEMS			SPECIFICATIONS
Type			V type, overhead camshaft
Number of cylinders			6
Bore mm (in)			87.6 (3.45)
Stroke mm (in)			82.9 (3.26)
Total displacement cm ³ (cu. in)			2,998 (182.9)
Compression ratio			9.5
Firing order			1-2-3-4-5-6
Valve timing	Intake valve	Opens (BTDC)	--1° < Low speed cam >
			18° < High speed cam >
		Closes (ABDC)	37° < Low speed cam >
			86° < High speed cam >
	Exhaust valve	Opens (BBDC)	55°
		Closes (ATDC)	17°
Lubrication system			Pressure feed, full-flow filtration
Oil pump type			Trochoid type

ENGINE DIAGNOSIS**ENGINE SPECIFICATION**

SYMPTOMS	PROBABLE CAUSE	REMEDY
Compression is too low	Blown cylinder head gasket	Replace the gasket.
	Worn or damaged piston rings	Replace the rings.
	Worn piston or cylinder	Repair or replace the piston and/or the cylinder block.
	Worn or damaged valve seat	Repair or replace the valve and/or the seat ring
Drop in engine oil pressure	Engine oil level is too low	Check the engine oil level.
	Malfunction of engine oil pressure switch	Replace the engine oil pressure switch.
	Clogged oil filter	Install a new filter.

2008 Mitsubishi Outlander ES

2008 ENGINE Engine Mechanical (3.0L) - Outlander

	Worn oil pump gears or cover	Replace the gears and/or the cover.
	Thin or diluted engine oil	Change the engine oil to the correct viscosity.
	Stuck (opened) oil relief valve	Repair the relief valve.
	Excessive bearing clearance	Replace the bearings.
Engine oil pressure too high	Stuck (closed) oil relief valve	Repair the relief valve.
Noisy valves	Incorrect valve clearance < Intake side >	Adjust valve clearance
	Malfunction of lash adjuster (including entry of air into high pressure chamber) < Exhaust side >	Check the lash adjuster.
	Thin or diluted engine oil (low engine oil pressure)	Change the engine oil.
	Worn or damaged valve stem or valve guide	Replace the valve and/or the guide.
Connecting rod noise/main bearing noise	Insufficient oil supply	Check the engine oil level.
	Thin or diluted engine oil	Change the engine oil.
	Excessive bearing clearance	Replace the bearings.

SERVICE SPECIFICATIONS**STANDARD VALUE SPECIFICATION**

Item		Standard value	Limit
Power steering oil pump drive belt tension (When checked)	Vibration frequency Hz	128-165	-
	Tension N (lb)	294-490 (66-110)	-
	Deflection (Reference) mm (in)	11.9-15.6 (0.47-0.61)	-
Power steering oil pump drive belt tension (When adjusted)	Vibration frequency Hz	138-157	-
	Tension N (lb)	343-441 (77-99)	-
	Deflection (Reference) mm (in)	12.7-14.6 (0.50-0.57)	-
Power steering oil pump drive belt tension (When replaced)	Vibration frequency Hz	165-196	-
	Tension N (lb)	490-686 (110-154)	-
	Deflection (Reference) mm (in)	9.2-11.9 (0.36-0.47)	-
Basic ignition timing at idle		5° BTDC ± 3°	-
Actual ignition timing at curb idle Approximately		10° BTDC	-
CO contents %		0.5 or less	-
HC contents ppm		100 or less	-
Curb idle speed r/min		600 ± 100	-
Compression pressure (200 r/min) kPa (psi)		1,460 (212)	Minimum 1,050 (153)

2008 Mitsubishi Outlander ES

2008 ENGINE Engine Mechanical (3.0L) - Outlander

Compression pressure difference of all cylinder kPa (psi)	-	98 (14)
Intake manifold vacuum at curb idle kPa (in Hg)	-	Minimum 60 (18)
Auto-tensioner rod protrusion amount mm (in)	9.1-13.4 (0.36-0.52)	-

SEALANTS

SEALANTS SPECIFICATION

Item	Specified sealant
Engine upper oil pan, engine lower oil pan	Three bond 1217G (Mitsubishi Genuine Part No.1000A923), Three bond 1227D, Three bond 1207F (Mitsubishi Genuine Part No.MD970389), LOCTITE 5971, LOCTITE 5970, LOCTITE 5900
Drive plate bolt	Three bond 1324 or exact equivalent
Engine oil pressure switch	Three bond 1215 or 1212D or equivalent







SPECIAL TOOLS

SPECIAL TOOLS CHART

Tool	Tool number and name	Supersession	Application
	MB992080 Belt tension meter set a. MB9912081 Belt tension meter b. MB992082 Mic assembly	Tool not available	Drive belt tension (frequency) measurement
	MB991958 Scan tool (M.U.T.-III sub assembly) a. MB991824 Vehicle communication interface (V.C.I.) b. MB991827 M.U.T.-III USB cable c. MB991910 M.U.T.-III main harness A (Vehicles with CAN communication system) d. MB991911 M.U.T.-III main harness B (Vehicles without CAN communication)	MB991824-KIT NOTE: MB991826 M.U.T.-III Trigger Harness is not necessary when pushing V.C.I. ENTER key.	CAUTION: For vehicles with CAN communication, use M.U.T.-III main harness A to send simulated vehicle speed. If you connect M.U.T.-III main harness B instead, the CAN communication does not function correctly. • Ignition timing check • Curb idle speed check • Idle mixture check • Erasing the






2008 Mitsubishi Outlander ES

2008 ENGINE Engine Mechanical (3.0L) - Outlander

A  MB991824 B  MB991827 C  MB991910 D  MB991911 E  MB991914 F  MB991825 G  MB991826 MB991958	system) e. MB991914 M.U.T.-III main harness C (for Chrysler models only) f. MB991825 M.U.T.-III adapter harness g. MB991826 M.U.T.-III trigger harness		diagnostic trouble code
 B990767	MB990767 End yoke holder	MB990767-01	Holding the crankshaft pulley and camshaft sprocket
 D998719	MD998719 Pin	MIT308239	
 D998713	MD998713 Camshaft oil seal installer	MD998713-01	Press-in of the camshaft oil seal
	MD998777 Camshaft oil seal installer adapter	-	Press-fitting the camshaft oil seal (left bank)



2008 Mitsubishi Outlander ES

2008 ENGINE Engine Mechanical (3.0L) - Outlander

 MD998777			
 D998443	MD998443 Auto-lash adjuster holder	MD998443-01	Holding the auto-lash adjuster
 MD998772	MD998772 Valve spring compressor	General service tool	Compressing valve spring
 MB992182	MB992182 Valve stem seal installer	-	Valve stem seal installation
 D998727	MD998727 Oil pan FIPG cutter	MD998727-01	Engine lower oil pan removal
 D998382	MD998382 Crankshaft front oil seal installer	MD998382-01	Press-in of the crankshaft front oil seal
 D998781	MD998781 Flywheel stopper	General service tool	Securing the drive plate
 MB992075	MB992075 Handle	-	Crankshaft rear oil seal installation
 MB992183	MB992183 Crankshaft rear oil seal installer	-	
	MB991614 Angle gauge	-	Cylinder head bolt

2008 Mitsubishi Outlander ES

2008 ENGINE Engine Mechanical (3.0L) - Outlander

 MB991614			installation
	MD998716 Crankshaft wrench	MD998716-01	Rotating the crankshaft when installing the timing belt
 MB992208	MB992208 Engine hanger plate A	General Service Tool	Supporting the engine assembly during removal and installation of the transaxle assembly
 B991454	MB991454 Engine hanger balancer	MZ203827-01	When the engine hanger is used: Supporting the engine assembly during removal and installation of the transaxle assembly
 MB991895	MB991895 Engine hanger	Tool not available	NOTE: Special tool MB991454 is a part of engine hanger attachment set MB991453.
 Slide bracket (HI) F A D E B C B991928	MB991928 Engine hanger a. MB991929 Joint (50) x 2 b. MB991930 Joint (90) x 2 c. MB991931 Joint (140) x 2 d. MB991932 Foot (standard) x 4 e. MB991933 Foot (short) x 2 f. MB991934 Chain and hook assembly	Tool not available	

ON-VEHICLE SERVICE

GENERATOR DRIVE BELT TENSION CHECK

CAUTION: Check the drive belt tension after turning the crankshaft clockwise one turn or more.

1. Make sure that the indicator mark is within the area marked with A in the illustration.
2. If the mark is out of the area, replace the drive belt. Refer to **CRANKSHAFT PULLEY**.

NOTE: The drive belt tension adjustment is not necessary, as the engine is equipped with an auto-tensioner.

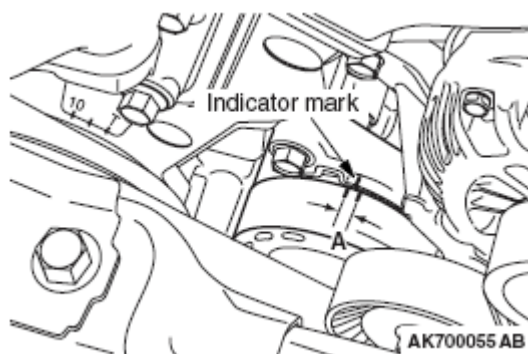


Fig. 1: Identifying Indicator Mark

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

AUTO-TENSIONER CHECK

OPERATION CHECK

1. Turn OFF the engine, then check to see that the drive belt is not protruding from the pulley width of the auto-tensioner.
2. Remove the drive belt. Refer to **CRANKSHAFT PULLEY**.
3. Securely insert the spindle handle or ratchet handle at a 12.7 mm (1/2-inch) angle into the hexagonal boss of the auto tensioner. Turn the auto-tensioner slowly to the left and right to check and see that there is no binding or noise.
4. If there are any problems in the procedure 1 or 3, replace the auto-tensioner. Refer to **TIMING BELT**.
5. Install the drive belt. Refer to **CRANKSHAFT PULLEY**.

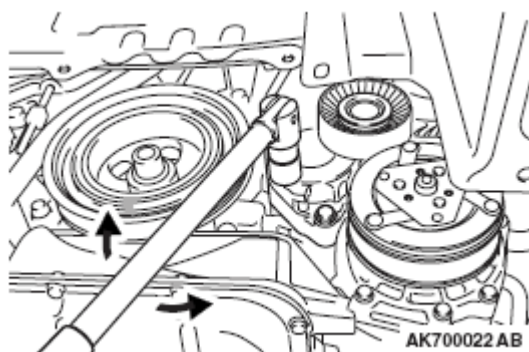


Fig. 2: Removing Drive Belt

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

DRIVE BELT TENSION CHECK AND ADJUSTMENT

POWER STEERING OIL PUMP DRIVE BELT TENSION CHECK

When the vibration frequency is measured: Recommendation

Required Special Tools:

- MB992080: Belt Tension Meter Set
 - MB992081: Belt Tension Meter
 - MB992082: Mic Assembly

NOTE: The vibration frequency measuring method is recommended for check and adjustment of the drive belt tension.

1. Connect the special tool MB992082 to the special tool MB992081 of the Special tool MB992080.
2. Press the "POWER" button to turn on the power supply.
3. Press number key 1. Check to ensure that "No. 01" appears on the upper left of the display and that the following numeric values are displayed for individual items (M, W, and S):

M 000.9 g/m

W 010.0 mm/R

S 0100 mm

Belt tension meter set (MB992080)

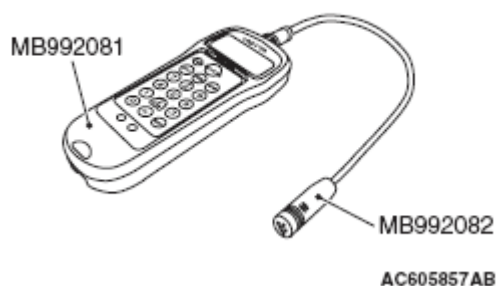


Fig. 3: Connecting Special Tool MB992082 And Special Tool MB992081
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

If numeric values have not been entered (new tool), set them according to the belt specifications as shown below. Once you set them, you do not have to set them again. The settings remain undeleted even after battery replacement.

NOTE: This operation is to temporarily set the preset data such as the belt specifications, because if the measurement is taken without input of the belt specifications, conversion to tension value (N) cannot be made, resulting in judgement of error.

Setting Procedure:

1. Press down the "MASS" button till the belt mass select display appears.
2. Press the "UP" or "DOWN" button to select "01 1.5 GT 0.9" and press the "MEASURE" button to decide it.

Check to ensure that "M 000.9 g/m" is displayed.

3. Press the "WIDTH" button to change to the belt width input display.
 4. Press number keys 0, 1, 0, and 0 sequentially, and press the "SELECT" button to apply them. Check to ensure that "W 010.0 mm/R" appears on the display.
 5. Press the "SPAN" button to change to the span length input display.
 6. Press number keys 0, 1, 0, and 0 sequentially, and press the "SELECT" button to apply them. Check to ensure that "S 0100 mm" appears on the display.
4. Press "Hz" button twice to change the display to the frequency display (Hz).

CAUTION:

- The temperature of the surface of the belt should be as close to normal temperature as possible.
- Do not allow any contaminants such as water or oil to get onto the microphone.
- If strong gusts of wind blow against the microphone or if there are any loud sources of noise nearby, the values measured by

the microphone may not correspond to actual values.

- If the microphone is touching the belt while the measurement is being made, the values measured by the microphone may not correspond to actual values.
- Do not take the measurement while the vehicle's engine is running.

5. Hold special tool MB992080 to the middle of the drive belt between the pulleys (at the place indicated by arrow), approximately 10-15 mm (0.4-0.59 inch) away from the rear surface of the belt so that it is perpendicular to the belt (within an angle of ± 15 degree).
6. Press the "MEASURE" button.
7. Gently tap the middle of the belt between the pulleys (the place indicated by the arrow) with your finger as shown in the illustration, and measure that the vibration frequency of the belt is within the standard value.

Standard value: 128-165 Hz

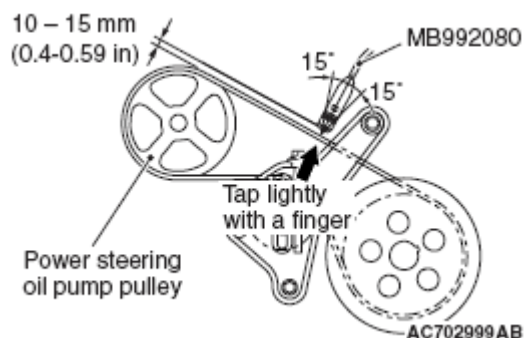


Fig. 4: Holding Special Tool MB992080 To Middle Of Drive Belt Between Pulleys
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

WHEN USING A TENSION GAUGE

Use a belt tension gauge to check that the belt tension is within the standard value.

Standard value: 294-490 N (66-110 pound)

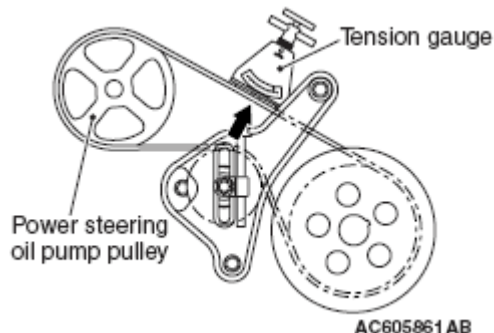


Fig. 5: Locating Tension Gauge And Power Steering Oil Pump Pulley
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

BELT DEFLECTION CHECK

Apply approximately 100 N (22 pound) of force to the middle of the drive belt between the pulleys (at the place indicated by the arrow) and check that the amount of deflection is within the standard value.

Standard value: 11.9-15.6 mm (0.47-0.61 inch)

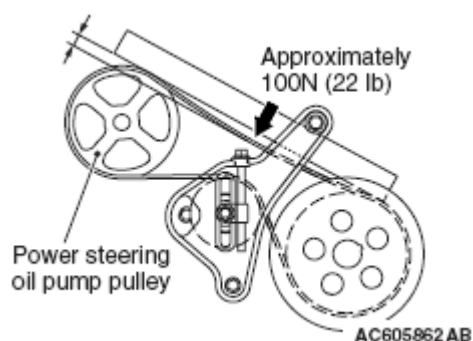


Fig. 6: Locating Power Steering Oil Pump Pulley
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

POWER STEERING OIL PUMP DRIVE BELT TENSION ADJUSTMENT

If the tension or deflection is outside the standard value, adjust by the following procedure.

1. Loosen the tensioner pulley lock nut.
2. Adjust the belt tension to the standard value by turning the adjusting bolt. The tension will increase when turning the adjusting bolt clockwise, and decrease when turning counterclockwise.

Standard value:

STANDARD VALUE SPECIFICATION

Item	When adjusted	When replaced
Vibration frequency Hz	138-157	165- 196
Tension N (lb)	343-441 (77-99)	490-686 (110-154)
Deflection (Reference) mm (in)	12.7-14.6 (0.50-0.57)	9.2-11.9 (0.36-0.47)

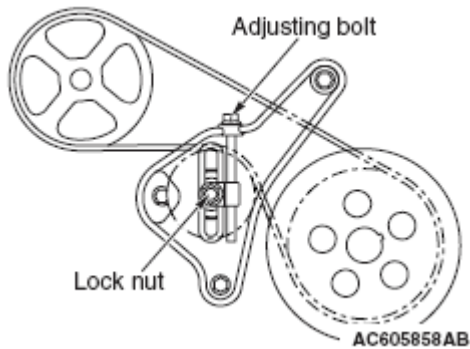


Fig. 7: Identifying Lock Nut And Adjusting Bolt
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

3. Tighten the lock nut to the specified torque.

Tightening torque: 47 ± 11 N.m (35 ± 8 ft-lb)

CAUTION: Check after turning the crankshaft one or more rotations clockwise.

4. Check the belt deflection amount and tension, and readjust if necessary.
5. When the belt tension is adjusted by measuring the belt deflection, adjust it with a tool for vibration frequency measurement or tension measurement afterward.

VALVE CLEARANCE CHECK AND ADJUSTMENT

Refer to INTAKE AND EXHAUST VALVE CLEARANCE [4G6-MIVEC ENGINE AND 6G7-MIVEC ENGINE (INTAKE SIDE ONLY)] (INSPECT AND ADJUST) .

ROCKER ARM PISTON OPERATION CHECK

1. Remove all of the ignition coils.
2. Remove the rocker cover.

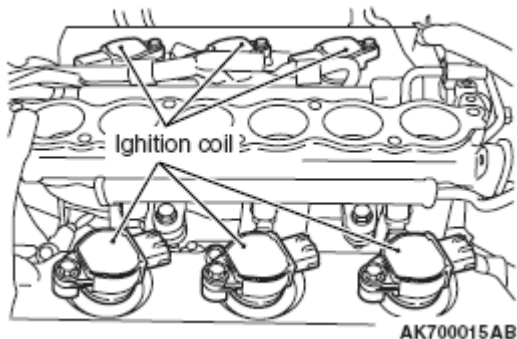


Fig. 8: Identifying Ignition Coil

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

3. Remove the engine oil control valve.
4. Remove the oil pipe.
5. Turn the crankshaft clockwise until the notch on the crankshaft pulley is lined up with the "T" mark on the lower cover of timing belt.

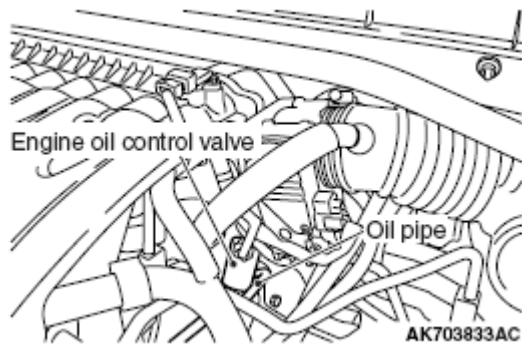


Fig. 9: Identifying Engine Oil Valve And Oil Pipe

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

6. Move the rocker arms on the No.1 and No. 4 cylinders up and down by hand to determine which cylinder has its piston at the top dead center on the compression stroke.

NOTE: The rocker arm piston operation check can be performed on rocker arms indicated by white arrow mark when the No.1 cylinder piston is at the top dead center on the compression stroke, and on rocker arms indicated by black arrow mark when the No.4 cylinder piston is at the top dead center on the compression stroke.

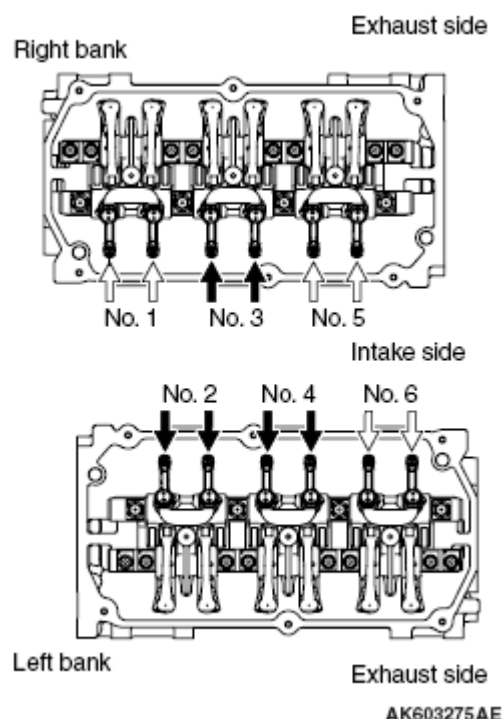


Fig. 10: Moving Rocker Arms On No. 1 And No. 4 Cylinders
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

7. While shutting up the oil passage hole at the depth of the engine oil control valve's installation hole by finger not to leak air, blow compressed air into the engine oil pressure switch's installation hole by air blow gun. At this time, confirm that the rocker arm piston can operate.

NOTE: To fully confirm the check, prevent the compression air from leaking as much as possible by bind vinyl tape to the end of air blow gun. The compression air pressure is required more than 620 kPa (90 psi).

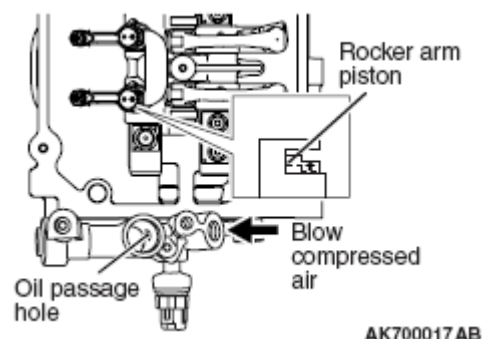


Fig. 11: Identifying Rocker Arm, Blow Compressed Air And Oil Pressure Hole
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

8. Turn the crankshaft clockwise until the notch on the crankshaft pulley is lined up with the "T" mark on the lower cover of timing belt.

9. Confirm the rest of the rocker arm pistons under the procedure 7.
10. When the rocker arm piston does not operate, replace the rocker arm assembly.
11. Install the engine oil pipe and the engine oil control valve. Refer to **CAMSHAFT AND VALVE STEM SEAL - REMOVAL AND INSTALLATION**.
12. Install the rocker cover.
13. Install all of the ignition coils.

IGNITION TIMING CHECK

Required Special Tool:

MB991958: Scan Tool (M.U.T.-III Sub Assembly)

- MB991824: V.C.I.
- MB991827: M.U.T.-III USB Cable
- MB991910: M.U.T.-III Main Harness A

1. Before inspection, set the vehicle in the following condition:

- Engine coolant temperature: 80-95°C (176-203°F)
- Lights and all accessories: OFF
- Transaxle: P range

NOTE: On vehicles for Canada, the headlight, taillight, etc. remain lit even when the lighting switch is in "OFF" position but this is no problem for checks.

CAUTION: To prevent damage to scan tool MB991958, always turn the ignition switch to the "LOCK" (OFF) position before connecting or disconnecting scan tool MB991958.

2. Connect scan tool MB991958 to the data link connector.

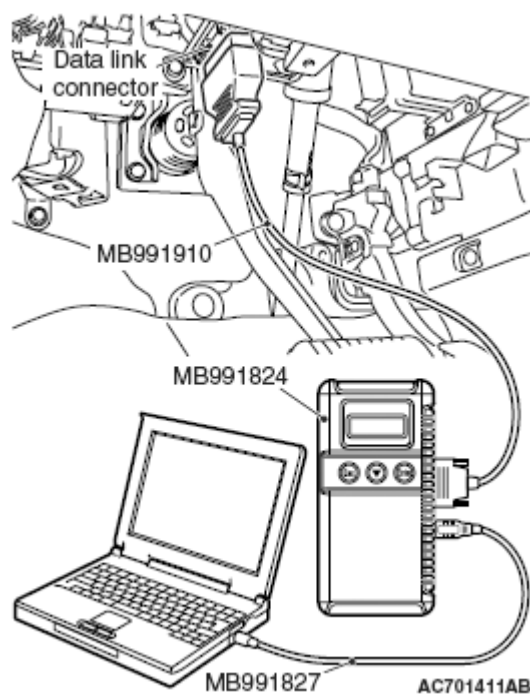


Fig. 12: Connecting Scan Tool MB991958 To Data Link Connector
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

3. Set the timing light to the power supply line (terminal No. 1) of the ignition coil No. 2.

NOTE: The power supply line is looped and also longer than the other ones.

4. Start the engine and run it at idle.
5. Check that the idle speed is approximately 600 r/min.
6. Select scan tool MB991958 actuator test "item number 11".
7. Check that basic ignition timing is within the standard value.

Standard value: 5° BTDC ± 3°

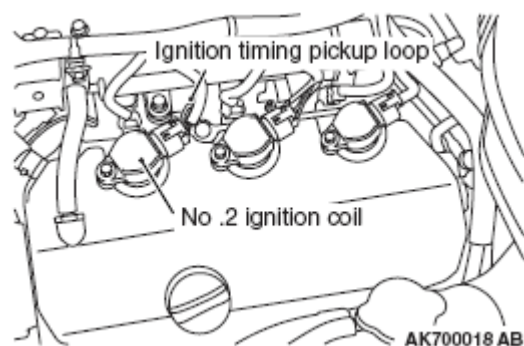


Fig. 13: Identifying Ignition Timing Pickup Loop And No.2 Ignition Coil
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

8. If the basic ignition timing is not within the standard value, refer to **SYMPTOM CHART** .

CAUTION: If the actuator test is not canceled, the forced drive will continue for 27 minutes. Driving in this state could lead to engine failure.

9. Cancel the setting mode of the scan tool MB991958.
10. Check that the actual ignition timing is at the standard value.

Standard value: Approximately 10° BTDC

NOTE: The ignition timing fluctuates about $\pm 7^\circ$, even under normal operating condition.

NOTE: It is automatically further advanced by about 5° from 10° Before Top Dead Center at higher altitudes.

NOTE: Wait till approximately 1 minute passes after the engine started, and check the ignition timing when the engine stabilized.

11. Remove the timing light.

CAUTION: To prevent damage to scan tool MB991958, always turn the ignition switch to the "LOCK" (OFF) position before connecting or disconnecting scan tool MB991958.

12. Disconnect scan tool MB991958 from the data link connector.

CURB IDLE SPEED CHECK

Required Special Tool:

MB991958: Scan Tool (M.U.T.-III Sub Assembly)

- MB991824: V.C.I.
- MB991827: M.U.T.-III USB Cable
- MB991910: M.U.T.-III Main Harness A

1. Before inspection, set the vehicle in the following condition:
- Engine coolant temperature: 80-95°C (176-203°F)
 - Lights and all accessories: OFF
 - Transmission: P range

NOTE: On vehicles for Canada, the headlight, taillight, etc. remain lit even

when the lighting switch is in "OFF" position but this is no problem for checks.

CAUTION: To prevent damage to scan tool MB991958, always turn the ignition switch to the "LOCK" (OFF) position before connecting or disconnecting scan tool MB991958.

2. Connect scan tool MB991958 to the data link connector.

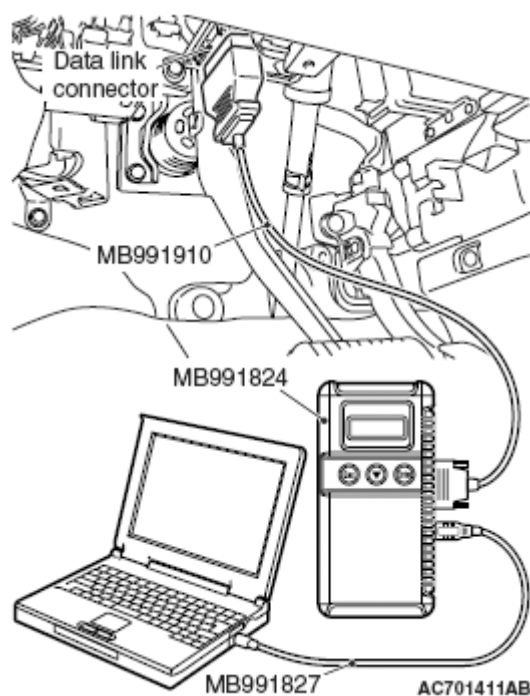


Fig. 14: Connecting Scan Tool MB991958 To Data Link Connector
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

3. Set the timing light to the power supply line (terminal No. 1) of the ignition coil No. 2.

NOTE: The power supply line is looped and also longer than the other ones.

4. Start the engine.
5. Run the engine at idle for 2 minutes.
6. Check that the actual ignition timing is at the standard value.

Standard value: Approximately 10° BTDC

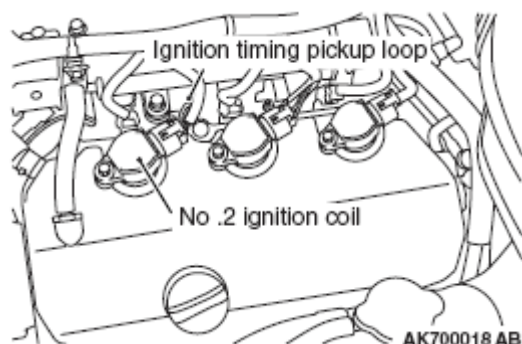


Fig. 15: Identifying Ignition Timing Pickup Loop And No. 2 Ignition Coil
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

NOTE: The ignition timing fluctuates about $\pm 7^\circ$, even under normal operating condition.

NOTE: It is automatically further advanced by about 5° from 10° Before Top Dead Center at higher altitudes.

7. Check the idle speed. Select item number 2 and take a reading of the idle speed.

Curb idle speed: 600 ± 100 r/min

NOTE: The idle speed is controlled automatically by the idle air control system.

8. If the idle speed is outside the standard value, refer to SYMPTOM CHART.

CAUTION: To prevent damage to scan tool MB991958, always turn the ignition switch to the "LOCK" (OFF) position before connecting or disconnecting scan tool MB991958.

9. Disconnect scan tool MB991958 from the data link connector.

IDLE MIXTURE CHECK

Required Special Tool:

MB991958: Scan Tool (M.U.T.-III Sub Assembly)

- MB991824: V.C.I.
- MB991827: M.U.T.-III USB Cable
- MB991910: M.U.T.-III Main Harness A

1. Before inspection, set the vehicle in the following condition:
 - Engine coolant temperature: $80-95^\circ\text{C}$ ($176-203^\circ\text{F}$)

- Lights and all accessories: OFF
- Transmission: P range

NOTE: On vehicles for Canada, the headlight, taillight, etc. remain lit even when the lighting switch is in "OFF" position but this is no problem for checks.

CAUTION: To prevent damage to scan tool MB991958, always turn the ignition switch to the "LOCK" (OFF) position before connecting or disconnecting scan tool MB991958.

2. Connect scan tool MB991958 to the data link connector.

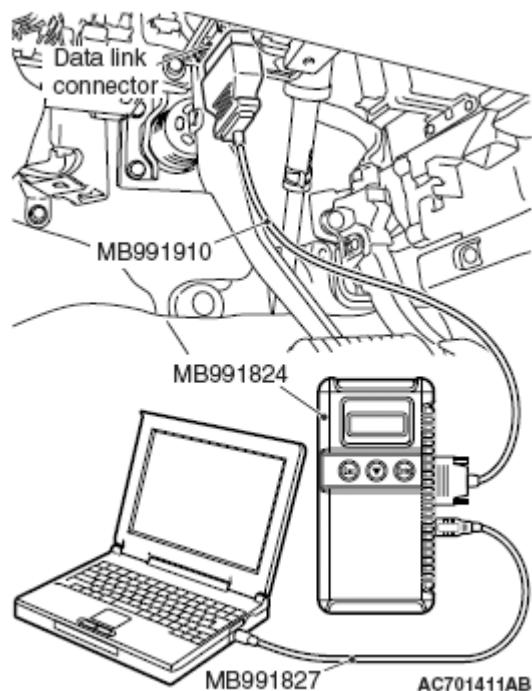


Fig. 16: Connecting Scan Tool MB991958 To Data Link Connector
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

3. Set the timing light to the power supply line (terminal No. 1) of the ignition coil No. 2.

NOTE: The power supply line is looped and also longer than the other ones.

4. Start the engine and run it at idle.
5. Check that the actual ignition timing is at the standard value.

Standard value: Approximately 10° BTDC

- NOTE:** The ignition timing fluctuates about $\pm 7^\circ$, even under normal operating condition.
- NOTE:** It is automatically further advanced by about 5° from 10° Before Top Dead Center at higher altitudes.
- NOTE:** Wait till approximately 1 minute passes after the engine started, and check the ignition timing when the engine stabilized.

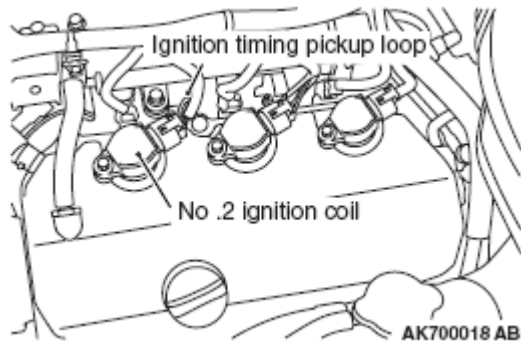


Fig. 17: Identifying Ignition Timing Pickup Loop And No.2 Ignition Coil
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

6. Increase the engine speed to 2,500 r/min for 2 minutes.
7. Set the CO, HC tester.
8. Check the CO contents and the HC contents at idle.

Standard value:

CO contents: 0.5% or less

HC contents: 100 ppm or less

9. If the CO and HC contents do not remain inside the standard value, refer to **SYMPTOM CHART**.
10. Remove the CO, HC tester and timing light.

CAUTION: To prevent damage to scan tool MB991958, always turn the ignition switch to the "LOCK" (OFF) position before connecting or disconnecting scan tool MB991958.

11. Disconnect scan tool MB991958 from the data link connector.

COMPRESSION PRESSURE CHECK

Required Special Tool:

MB991958: Scan Tool (M.U.T.-III Sub Assembly)

- MB991824: V.C.I.
- MB991827: M.U.T.-III USB Cable
- MB991910: M.U.T.-III Main Harness A


1. Before inspection, check that the engine oil, starter and battery are normal. Also, set the vehicle in the following condition:
 - Engine coolant temperature: 80-95°C (176-203°F)
 - Lights and all accessories: OFF
 - Transmission: P range

NOTE: On vehicles for Canada, the headlight, taillight, etc. remain lit even when the lighting switch is in "OFF" position but this is no problem for checks.

2. Remove all of the ignition coils and spark plugs.
3. Disconnect the injector connector.

WARNING: Keep your distance from the spark plug hole when cranking. Oil, fuel, etc., may spray out from the spark plug hole and may cause serious injury.

4. Cover the spark plug hole with a shop towel etc., during cranking. After the engine has been cranked, check for foreign material adhering to the shop towel.

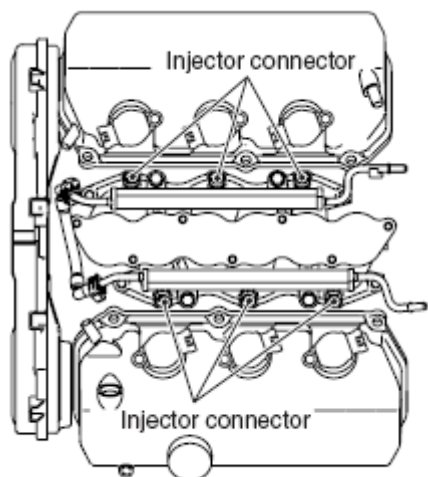

AK703815 AD

Fig. 18: Identifying Injector Connectors

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

5. Set compression gauge to one of the spark plug holes.

6. Crank the engine and measure the compression pressure.

Standard value (at engine speed of 200 r/min): 1,460 kPa (212 psi)

Minimum limit (at engine speed of 200 r/min): 1,050 kPa (153 psi)

7. Measure the compression pressure for all the cylinders, and check that the pressure differences of the cylinders are below the limit.

Limit: 98 kPa (14 psi)

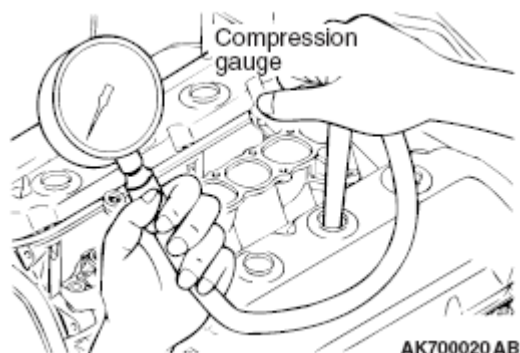


Fig. 19: Setting Compression Gauge To Spark Plug Holes
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

8. If there is a cylinder with compression or a compression difference that is outside the limit, pour a small amount of engine oil through the spark plug hole, and repeat the operations in steps 6 to 8.
 1. If the compression increases after oil is added, the cause of the malfunction is a worn or damaged piston ring and/or cylinder inner surface.
 2. If the compression does not rise after oil is added, the cause is a burnt or defective valve seat, or pressure is leaking from the gasket.
9. Connect the injector connector.
10. Install the spark plugs and ignition coils.
11. Use the scan tool MB991958 to erase the diagnostic trouble codes.

NOTE: This will erase the diagnostic trouble code resulting from the injector connector being disconnected.

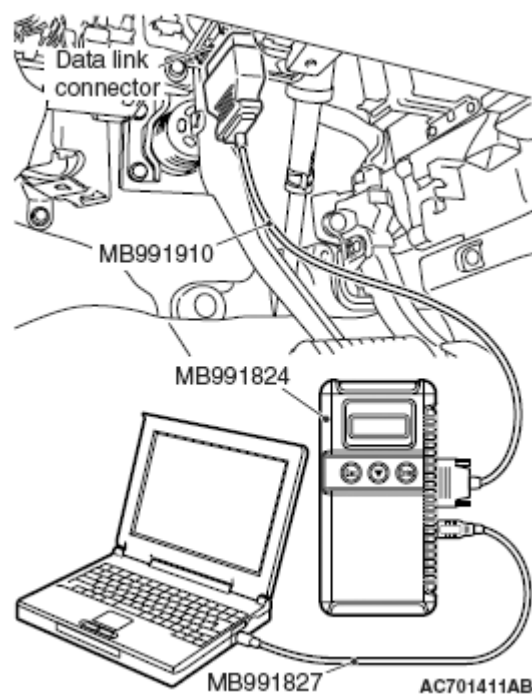


Fig. 20: Connecting Scan Tool MB991958 To Data Link Connector
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

MANIFOLD VACUUM CHECK

Required Special Tool:

MB991958: Scan Tool (M.U.T.-III Sub Assembly)

- MB991824: V.C.I.
- MB991827: M.U.T.-III USB Cable
- MB991910: M.U.T.-III Main Harness A

1. Before inspection, set the vehicle in the following condition:

- Engine coolant temperature: 80-95°C (176-203°F)
- Lights and all accessories: OFF
- Transaxle: P range

NOTE: On vehicles for Canada, the headlight, taillight, etc. remain lit even when the lighting switch is in "OFF" position but this is no problem for checks.

CAUTION: To prevent damage to scan tool MB991958, always turn the ignition switch to the "LOCK" (OFF) position before connecting or disconnecting scan tool MB991958.

2. Connect scan tool MB991958 to the data link connector.

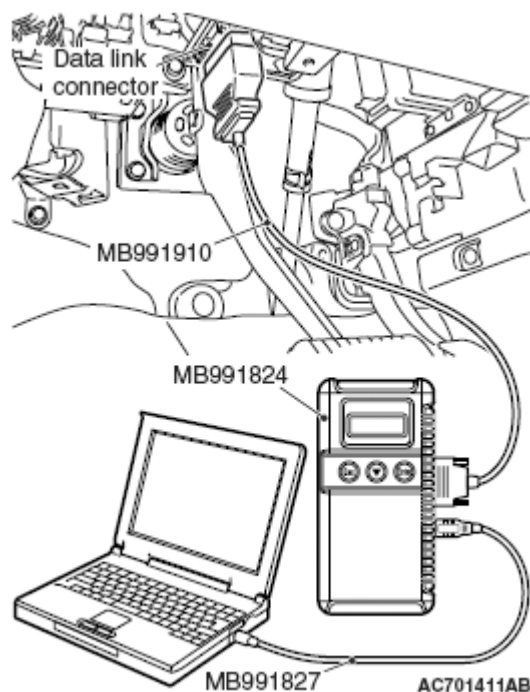


Fig. 21: Connecting Scan Tool MB991958 To Data Link Connector
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

3. Disconnect the ventilation hose from the positive crankcase ventilation (PCV) valve, and then connect a vacuum gauge to the ventilation hose. Plug the PCV valve.
4. Start the engine and check that idle speed is approximately 600 r/min.
5. Check the intake manifold vacuum.

Limit: Minimum 60 kPa (18 in Hg)

6. Turn off the ignition switch.
7. Remove the vacuum gauge and then connect the ventilation hose to the PCV valve.

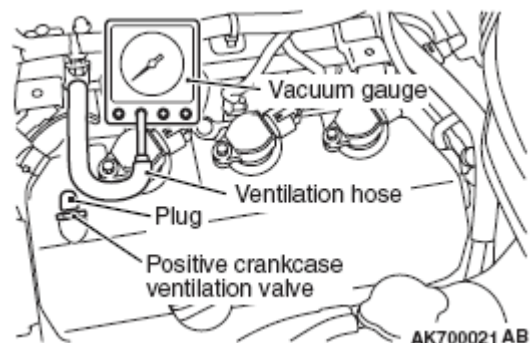


Fig. 22: Identifying Vacuum Gauge, Ventilation Hose And PCV Valve

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

CAUTION: To prevent damage to scan tool MB991958, always turn the ignition switch to the "LOCK" (OFF) position before connecting or disconnecting scan tool MB991958.

8. Disconnect scan tool MB991958 from the data link connector.

LASH ADJUSTER CHECK

If an abnormal noise (chattering noise) suspected to be caused by malfunction of the lash adjuster is produced immediately after starting the engine and does not disappear, perform the following check.

NOTE: The lash adjuster is installed in exhaust side only.

NOTE: Parking the vehicle on a grade for a long time may decrease oil in the lash adjuster, causing air to enter the high pressure chamber when starting the engine.

NOTE: After parking for many hours, oil may run out from the oil passage and take time before oil is supplied to the lash adjuster, causing air to enter the high pressure chamber.

NOTE: In the above cases, abnormal noise can be eliminated by bleeding the lash adjuster system.

NOTE: An abnormal noise due to malfunction of the lash adjuster is produced immediately after starting the engine and changes with the engine speed, irrespective of the engine load. If, the abnormal noise is not produced immediately after starting the engine or does not change with the engine speed, or it changes with the engine load, the lash adjuster is not the cause for the abnormal noise.

NOTE: When the lash adjuster is malfunctioning, the abnormal noise is rarely eliminated by continuing the warming-up of the engine at idle speed. However, the abnormal noise may disappear only when seizure is caused by oil sludge in the engine whose oil is not maintained properly.

1. Start the engine.
2. Check if the abnormal noise produced immediately after starting the engine, changes with the change in the engine speed.

If the abnormal noise is not produced immediately after starting the engine or it does not change with the engine speed, the lash adjuster is not the cause for the noise. Therefore, investigate other causes. The abnormal noise is probably caused by some other parts than the engine proper if it does not change with

the engine speed (in this case, the lash adjuster is in good condition).

3. With the engine idling, change the engine load (shift from N to D range, for example) to make sure that there is no change in the level of abnormal noise.

If there is a change in the level of abnormal noise, suspect a tapping noise due to worn crankshaft bearing or connecting rod bearing (In this case, the lash adjuster is in good condition).

4. After completion of warm-up, run the engine at idle to check for abnormal noise.

If the noise is reduced or disappears, clean the lash adjuster. Refer to **INSPECTION** . As it is suspected that the noise is due to seizure of the lash adjuster. If there is no change in the level of the abnormal noise, proceed to step 5.

5. Run the engine to bleed the lash adjuster system. Refer to **BLEEDING LASH ADJUSTER SYSTEM**.
6. If the abnormal noise does not disappear after air bleeding operation, clean the lash adjuster. Refer to **INSPECTION** .

Bleeding lash adjuster system

NOTE: It can possibly be difficult to check the oil level within 30 seconds of the engine stopped because of the structure of oil level gauge. If it's difficult, the oil level must be checked later. The oil level always check at the one side of oil level gauge: at the rear side of the vehicle. The oil level cannot be checked at the another side because the engine oil adheres to all the surfaces.


1. Check engine oil and add or change oil if required.

NOTE: If the engine oil level is low, air is sucked from the oil screen, causing air to enter the oil passage.

NOTE: If the engine oil level is higher than specification, oil may be stirred by the crankshaft, causing oil to be mixed with a large quantity of air.


NOTE: If oil is deteriorated, air is not easily separated from oil, increasing the quantity of air contained in oil.

Oil dipstick (engine cover side)

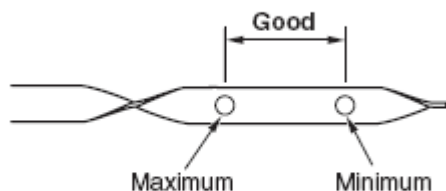

AK702482AB

Fig. 23: Identifying Oil Dipstick (Maximum And Minimum)
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

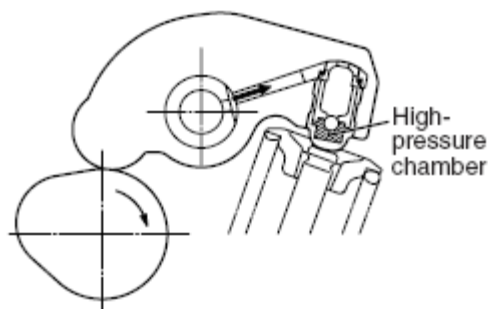

AK700023AB

Fig. 24: Identifying High Pressure Chamber
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

NOTE: If air mixed with oil enters the high pressure chamber inside the lash adjuster from the above causes, air in the high pressure chamber is compressed excessively while the valve is opened, resulting in an abnormal noise when the valve closes. This is the same phenomenon as that observed when the valve clearance has become excessive. The lash adjuster can resume normal function when air entered the lash adjuster is removed.

2. Idle the engine for one to three minutes to warm it up.
3. Repeat the operation pattern, shown in left figure, at no load to check for abnormal noise. (Usually the abnormal noise is eliminated after repetition of the operation 10 to 30 times. If, however, no change is observed in the level of abnormal noise after repeating the operation more than 30 times, suspect that the abnormal noise is due to some other factors.)
4. After elimination of abnormal noise, repeat the operation shown in left figure five more times.
5. Run the engine at idle for one to three minutes to make sure that the abnormal noise has been eliminated.

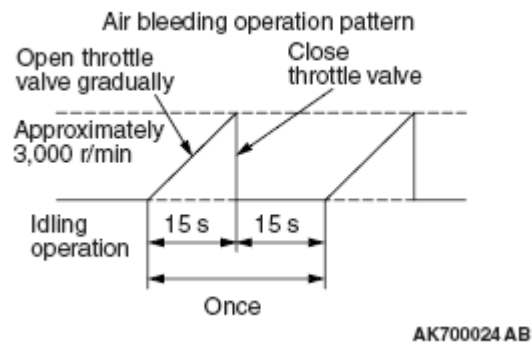


Fig. 25: Air Bleeding Operation Pattern

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

CRANKSHAFT PULLEY


REMOVAL AND INSTALLATION

Pre-removal Operation

- Engine Room Side Cover Removal

Post-installation Operation

- Drive Belt Tension Check and Adjustment
- Engine Room Side Cover Installation

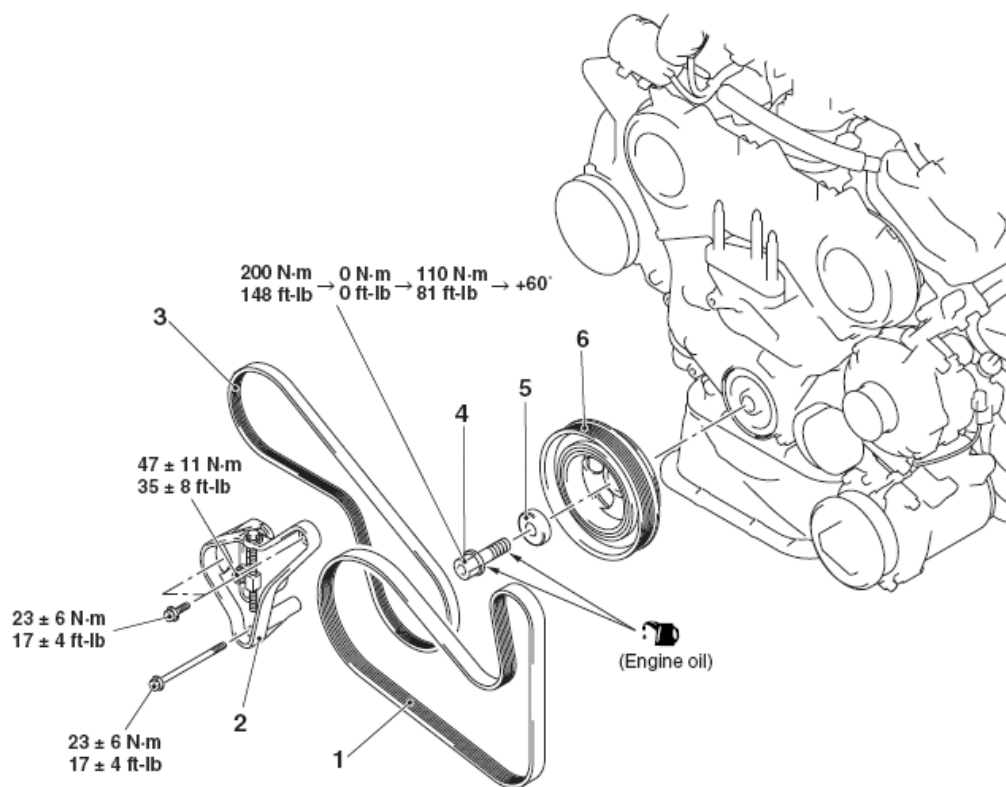

AC703043AB

<<A>>

Removal steps

1. Generator drive belt
2. Power steering tensioner pulley bracket assembly
3. Power steering oil pump drive belt

<>

Removal steps (Continued)

4. Crankshaft pulley center bolt
5. Crankshaft pulley washer
6. Crankshaft pulley

Fig. 26: Identifying Crankshaft Pulley Components With Torque Specifications
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tools:

- MB990767: End Yoke Holder
- MD998719: Pin

REMOVAL SERVICE POINTS**<< A >> GENERATOR DRIVE BELT REMOVAL**

CAUTION: When the generator drive belt is reused, draw an arrow indicating the rotating direction on the back of the belt using chalk to install the same direction.

1. Turn the drive belt auto-tensioner to counterclockwise, and insert the L-shaped hexagon wrench to the auto-tensioner hole in order to fix the auto-tensioner.
2. Remove the generator drive belt.

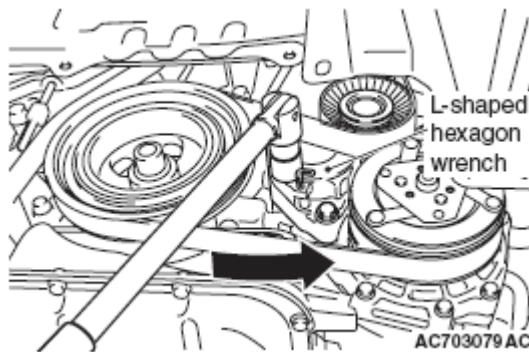


Fig. 27: Removing Generator Drive Belt

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< B >> CRANKSHAFT PULLEY CENTER BOLT/ CRANKSHAFT PULLEY WASHER/CRANKSHAFT PULLEY REMOVAL

CAUTION: Use only the specified special tools, or a damaged pulley damper could result.

Use special tools MB990767 and MD998719 to remove the crankshaft pulley from the crankshaft.

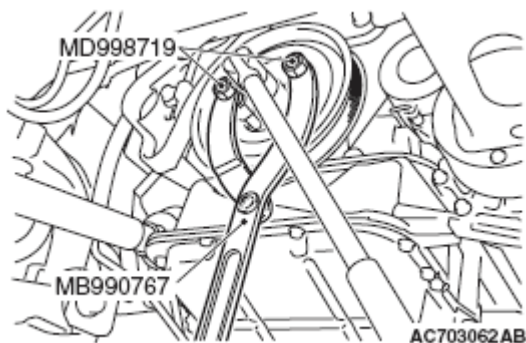


Fig. 28: Removing Crankshaft Pulley And Crankshaft

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

CAUTION: Provide one punch mark on the head of the crankshaft bolt each time the bolt is removed. Replace the bolt that already has three punch marks (the evidence of having been tightened 3 times).

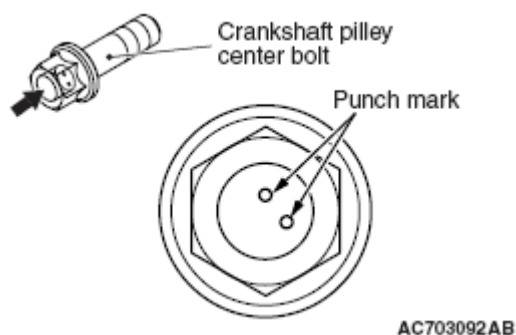


Fig. 29: Identifying Crankshaft Pulley And Punch Mark
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

INSTALLATION SERVICE POINT

>> A << CRANKSHAFT PULLEY/CRANKSHAFT PULLEY WASHER/CRANKSHAFT PULLEY CENTER BOLT INSTALLATION

CAUTION: Before installing the crankshaft bolt, check the number of punch marks on its head. (The bolt is reusable if it is two or less.) If the bolt has three punch marks, replace it.

1. Clean the bolt hole in crankshaft bolt and crankshaft pulley's seating surface.
2. Degrease the cleaned seating surface of the front flange and crankshaft pulley.
3. Install the front flange and crankshaft pulley.
4. Apply oil to the threads of crankshaft bolt and the outer surface of washer.

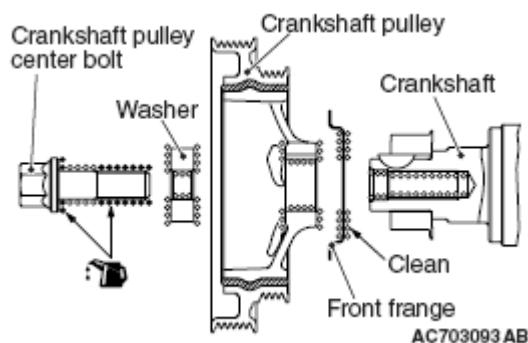


Fig. 30: Identifying Crankshaft Pulley Center Bolt, Crankshaft Pulley And Crankshaft
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

5. Use special tools MB990767 and MD998719 to install the crankshaft pulley.
6. Tighten the crankshaft bolt to 200 N.m (148 ft-lb).
7. Loosen the crankshaft bolt fully.
8. Tighten the crankshaft bolt to 110 N.m (81 ft-lb).

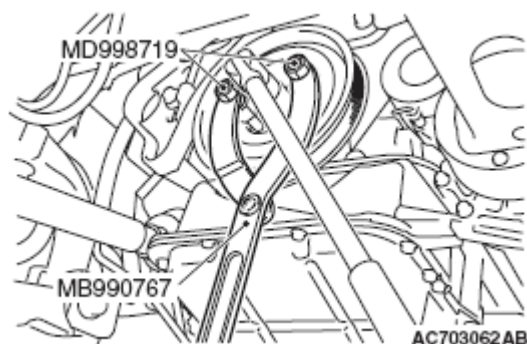


Fig. 31: Installing Crankshaft Pulley And Crankshaft
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

9. Make a paint mark on the crankshaft bolt.

CAUTION:

- If the nut is turned less than 60 degrees, proper fastening performance may not be achieved. Be careful to tighten the nut exactly 60 degrees.
- If the nut is overtightened (exceeding 60 degrees), loosen the nut completely and then retighten it by repeating the tightening procedure from step 6.

10. Make a paint mark on the bolt end at a position 60 degrees from the paint mark made on the washer in the direction of tightening the crankshaft bolt.
11. Turn the crankshaft bolt another 60 degrees and make sure that the paint marks on the washer and crankshaft bolt are aligned.

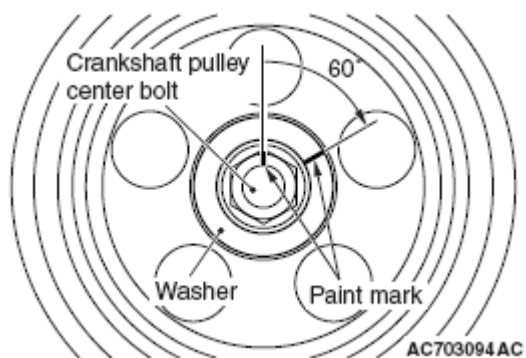



Fig. 32: Identifying Paint Mark On Crankshaft Bolt
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

CAMSHAFT OIL SEAL

REMOVAL AND INSTALLATION

Pre-removal and Post-installation Operation

- Timing Belt Removal and Installation

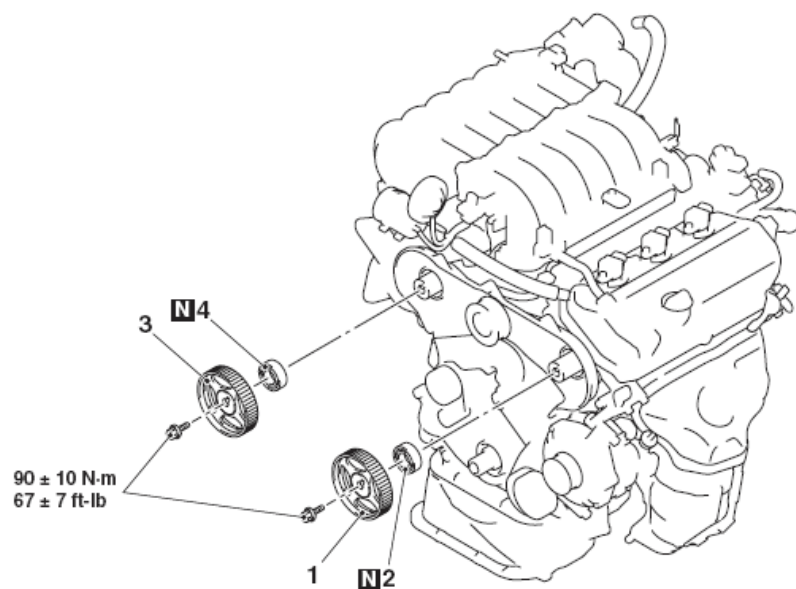

AC703047AB

Removal steps
 <<A>> >>B<< 1. Left bank camshaft sprocket
 <> >>A<< 2. Camshaft oil seal

Removal steps (Continued)
 <<A>> >>B<< 3. Right bank camshaft sprocket
 <> >>A<< 4. Camshaft oil seal

Fig. 33: Identifying Camshaft Oil Seal Components With Torque Specifications
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tools:

- MB990767: End Yoke Holder
- MD998713: Camshaft Oil Seal Installer
- MD998719: Pin
- MD998777: Camshaft Oil Seal Installer Adapter

REMOVAL SERVICE POINTS

<< A >> CAMSHAFT SPROCKET REMOVAL

Use special tools MB990767 and MD998719 to remove the camshaft sprocket.

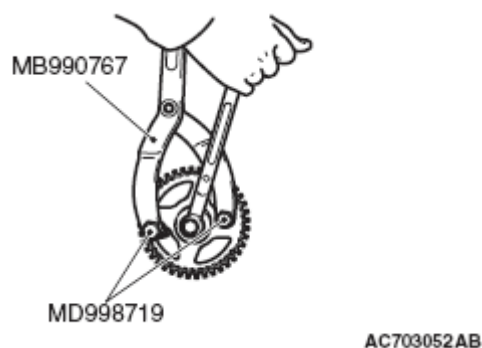


Fig. 34: Removing Camshaft Sprocket With Special Tools MB990767 And MD998719
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< B >> CAMSHAFT OIL SEAL REMOVAL

1. Make a notch in the oil seal lip section with a knife, etc.

CAUTION: Be careful not to damage the camshaft and the cylinder head.

2. Cover the end of a flat-tipped screwdriver with a shop towel and insert into the notched section of the oil seal, and pry out the oil seal to remove it.

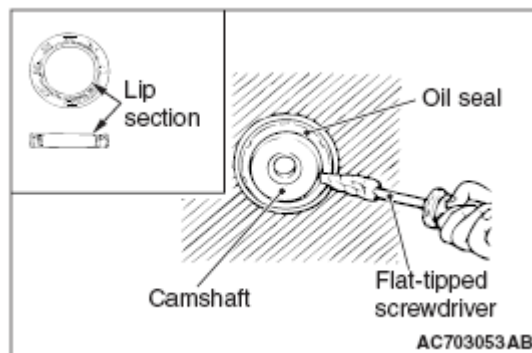


Fig. 35: Removing Camshaft Oil Seal
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

INSTALLATION SERVICE POINTS

>> A << CAMSHAFT OIL SEAL INSTALLATION

1. Apply engine oil to the camshaft oil seal lip.
2. Use special tools MD998713 and MD998777 to press-fit the camshaft oil seal.

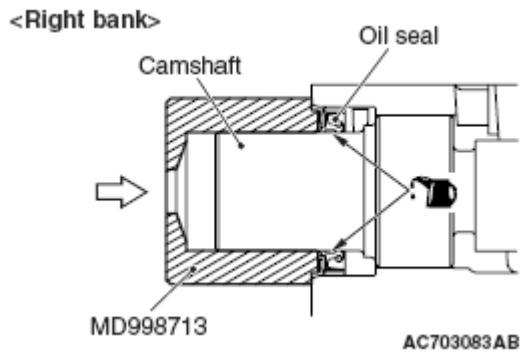


Fig. 36: Installing Camshaft Oil Seal (Right Bank)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

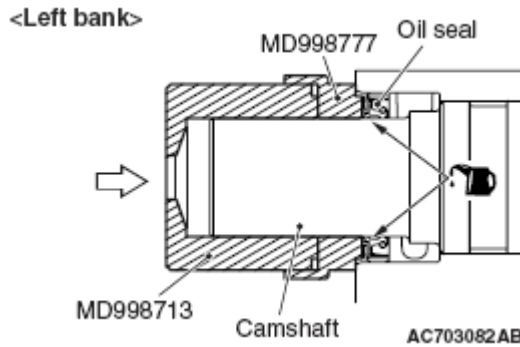


Fig. 37: Installing Camshaft Oil Seal (Left Bank)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> B << CAMSHAFT SPROCKET INSTALLATION

1. Use special tools MB990767 and MD998719 in the same way as during removal to install the camshaft sprocket.
2. Tighten the camshaft sprocket mounting bolt to the specified torque.

Tightening torque: 90 ± 10 N.m (67 ± 7 ft-lb)

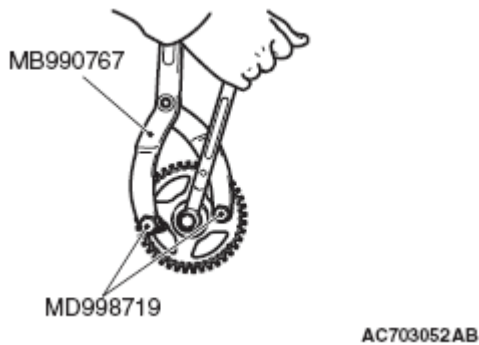


Fig. 38: Installing Camshaft Sprocket With Special Tools MB990767 And MD998719
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

CAMSHAFT AND VALVE STEM SEAL

REMOVAL AND INSTALLATION

CAUTION: *Remove and assemble the marked parts in each cylinder unit.

< Left bank >


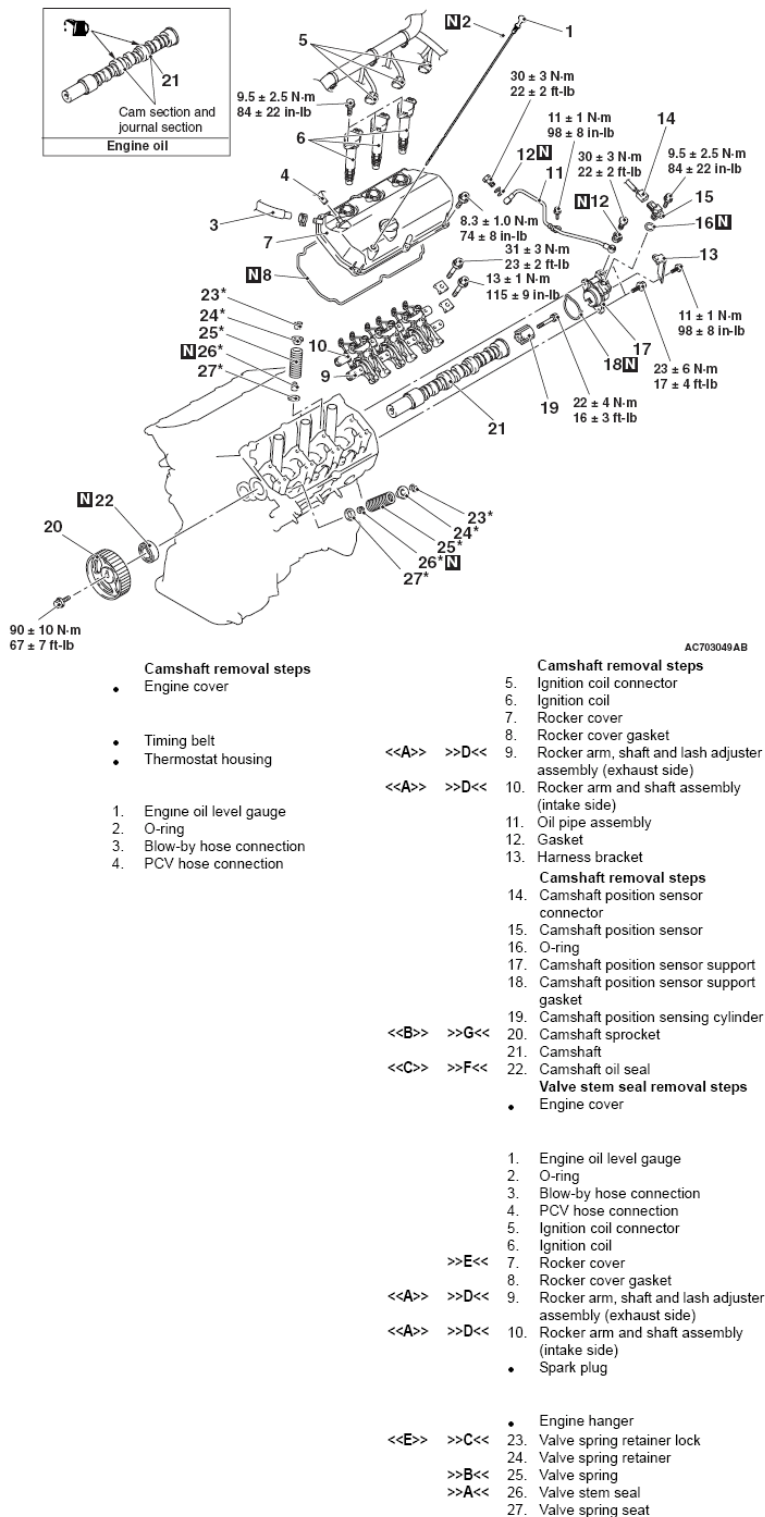


Fig. 39: Identifying Camshaft & Valve Stem Seal Parts With Torque Specifications (Left Bank)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tools:

- MB990767: End Yoke Holder
- MB992182: Valve Stem Seal Installer
- MD998443: Auto-lash Adjuster Holder
- MD998713: Camshaft Oil Seal Installer
- MD998719: Pin
- MD998772: Valve Spring Compressor
- MD998777: Camshaft Oil Seal Adapter Installer

< Right bank >

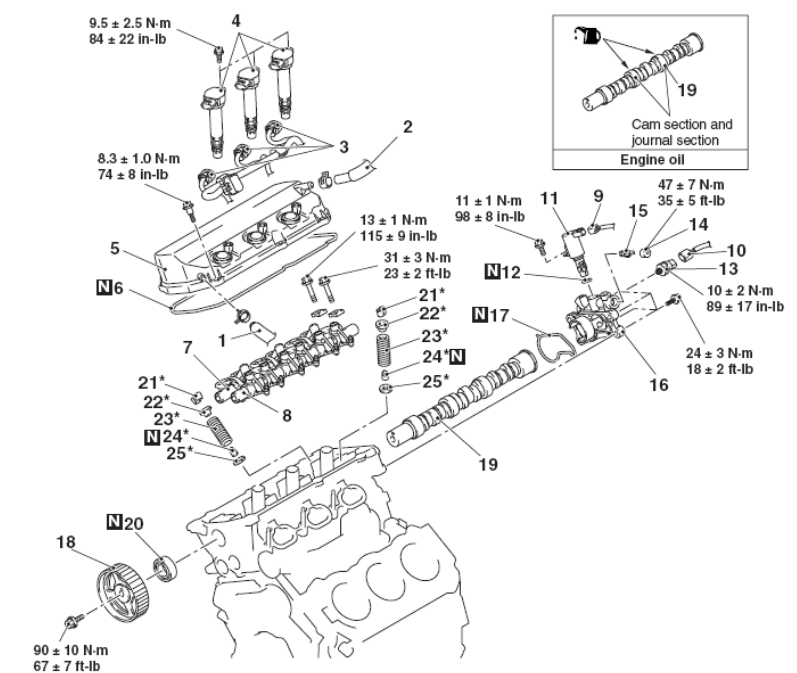

AC703173AB

Camshaft removal steps

- Intake manifold plenum

- Timing belt
- Thermostat housing

- Blow-by hose connection
- Breather hose connection

- Ignition coil connector
- Ignition coil

- Rocker cover

- Rocker cover gasket

<<A>> >>D<<

<<A>> >>D<<

- Rocker arm, shaft and lash adjuster assembly (exhaust side)
- Rocker arm and shaft assembly (intake side)

- Engine oil control valve connector

Valve stem seal removal steps

- Intake manifold plenum

- Timing belt

- Blow-by hose connection
- Breather hose connection

- Ignition coil connector
- Ignition coil

- Rocker cover

- Rocker cover gasket

<<A>> >>D<<

<<A>> >>D<<

- Spark plug

<<D>>

- Power steering oil pump

<<E>> >>C<<

- Valve spring retainer lock

- Valve spring retainer

- Valve spring

- Valve stem seal

- Valve spring seat

Camshaft removal steps

- Engine oil pressure switch connector
- Engine oil control valve

- O-ring

- Engine oil pressure switch
- Plug

- Engine oil control valve filter
- Engine oil control valve housing

- Engine oil control valve housing gasket

- Camshaft sprocket

- Engine control module

- Air cleaner bracket

- Camshaft

- Camshaft oil seal

Fig. 40: Identifying Camshaft & Valve Stem Seal Parts With Torque Specifications (Right Bank)
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tools:

- MB990767: End Yoke Holder
- MB992182: Valve Stem Seal Installer
- MD998443: Auto-lash Adjuster Holder
- MD998713: Camshaft Oil Seal Installer
- MD998719: Pin
- MD998772: Valve Spring Compressor

REMOVAL SERVICE POINTS**<< A >> ROCKER ARM, SHAFT AND LASH ADJUSTER ASSEMBLY (EXHAUST SIDE)/ROCKER ARM AND SHAFT ASSEMBLY (INTAKE SIDE) REMOVAL**

1. Install special tool MD998443 as shown in the illustration so that the lash adjusters will not fall out.

CAUTION: Never disassemble the rocker arm and shaft assembly.

2. Loosen the rocker arm and shaft assembly mounting bolt, and then remove the rocker arm and shaft assembly with the bolt still attached.

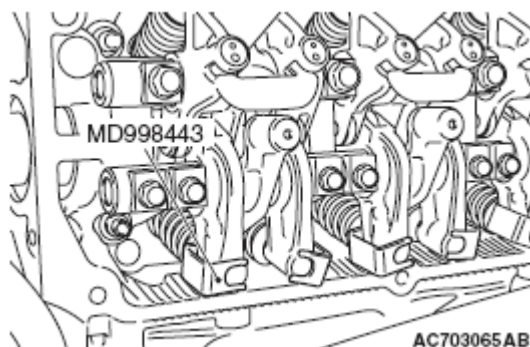


Fig. 41: Installing Special Tool MD998443

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< B >> CAMSHAFT SPROCKET REMOVAL

Use special tools MB990767 and MD998719 to remove the camshaft sprocket.

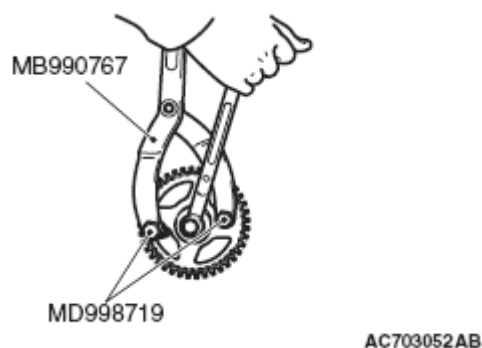


Fig. 42: Removing Camshaft Sprocket With Special Tools MB990767 And MD998719
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< C >> CAMSHAFT OIL SEAL REMOVAL

1. Make a notch in the oil seal lip section with a knife, etc.

CAUTION: Be careful not to damage the camshaft and the cylinder head.

2. Cover the end of a flat-tipped screwdriver with a shop towel and insert into the notched section of the oil seal, and pry out the oil seal to remove it.

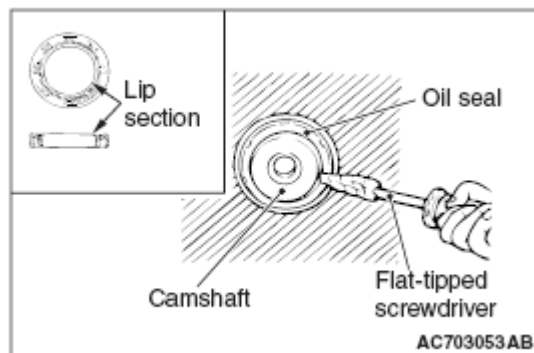


Fig. 43: Removing Camshaft Oil Seal
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< D >> POWER STEERING OIL PUMP REMOVAL

1. With the hose installed, remove the power steering oil pump from the bracket.
2. Tie the removed power steering oil pump using a string at a position where it will not interfere with the removal and installation of valve stem seal.

<< E >> VALVE SPRING RETAINER LOCK REMOVAL

CAUTION: When removing valve spring retainer locks, leave the piston of each

cylinder in the TDC (Top Dead Center) position. The valve may fall into the cylinder if the piston is not properly in the TDC position.

Use special tool MD998772 to compress the valve spring, and remove the valve spring retainer locks.

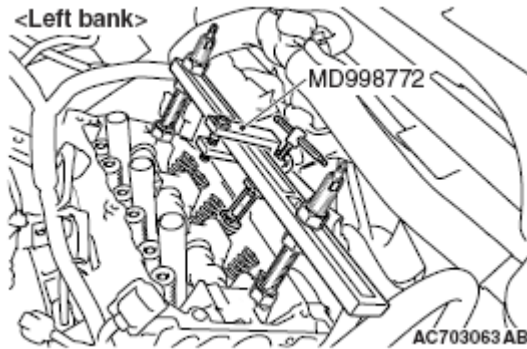


Fig. 44: Removing Valve Spring Retainer Locks With Special Tool MD998772 (Left Bank)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

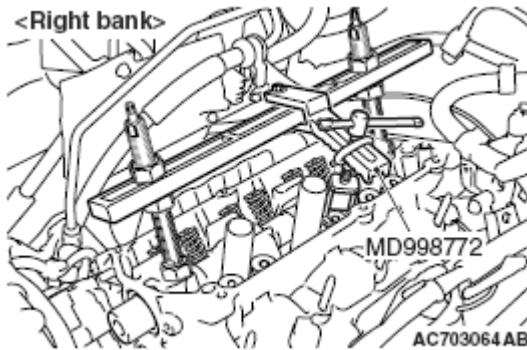


Fig. 45: Removing Valve Spring Retainer Locks With Special Tool MD998772 (Right Bank)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

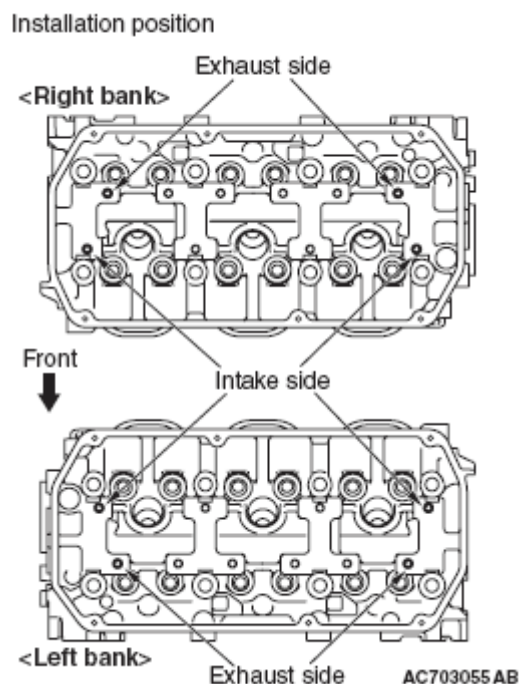


Fig. 46: Installing Valve Spring Retainer Locks Exhaust Side/Intake Side (Right Bank And Left Bank)
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

NOTE: Installation position of special tool is different between exhaust side and intake side.

INSTALLATION SERVICE POINTS

>> A << VALVE STEM SEAL INSTALLATION

1. Apply a small amount of engine oil to the valve stem seal.

CAUTION:

- Valve stem seals cannot be reused.
- Special tool must be used to install the valve stem seal. Improper installation could result in oil leaking past the valve guide.

2. Use special tool MB992182 to fill a new valve stem seal in the valve guide using the valve stem area as a guide.

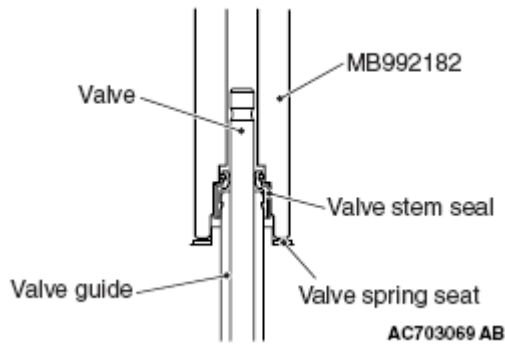


Fig. 47: Identifying Valve Guide, Valve, Valve Stem Seal And Valve Spring Seat
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> B << VALVE SPRING INSTALLATION

Install the valve spring with its identification color painted end facing the rocker arm.

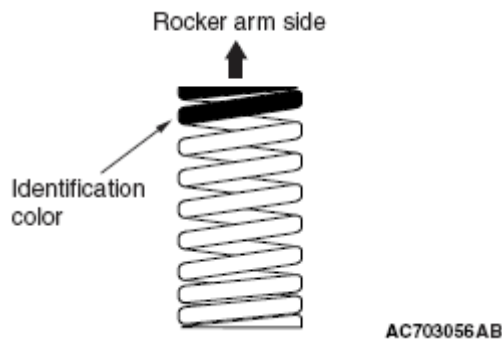


Fig. 48: Installing Valve Spring
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> C << VALVE SPRING RETAINER LOCK INSTALLATION

Use special tool MD998772 to compress the valve spring in the same manner as removal.

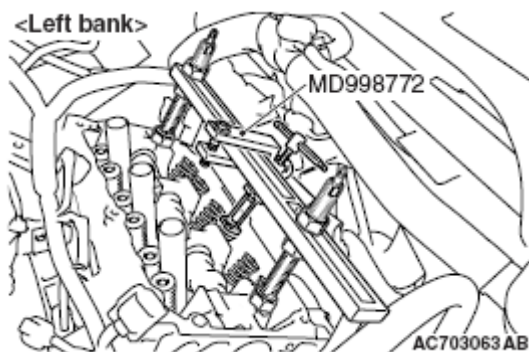


Fig. 49: Installing Valve Spring Retainer Locks With Special Tool MD998772 (Left Bank)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

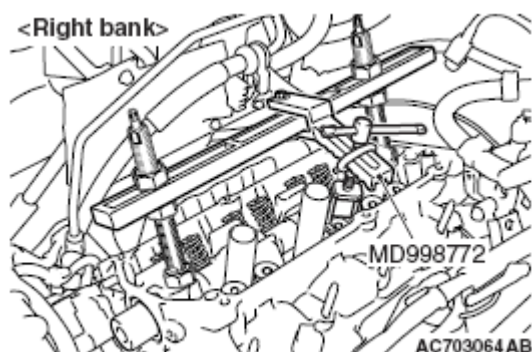


Fig. 50: Installing Valve Spring Retainer Locks With Special Tool MD998772 (Right Bank)
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> D << ROCKER ARM AND SHAFT ASSEMBLY (INTAKE SIDE)/ROCKER ARM, SHAFT AND LASH ADJUSTER ASSEMBLY (EXHAUST SIDE) INSTALLATION

1. Install the intake side rocker arm and shaft assembly so that the $\varnothing 5.5$ mm (0.22 inch) holes of rocker arm shaft face the cylinder head side.
2. Tighten the intake side rocker arm shaft mounting bolts to the specified torque.

Tightening torque: 31 ± 3 N.m (23 ± 2 ft-lb)

3. Install the exhaust side rocker arm, shaft and lash adjuster assembly so that the notch of rocker arm shaft is located as shown in the figure.
4. Check that the identification mark of exhaust side rocker shaft cap is located as shown in the figure.
5. Tighten the exhaust side rocker arm shaft mounting bolts to the specified torque.

Tightening torque: 13 ± 1 N.m (115 ± 9 in-lb)

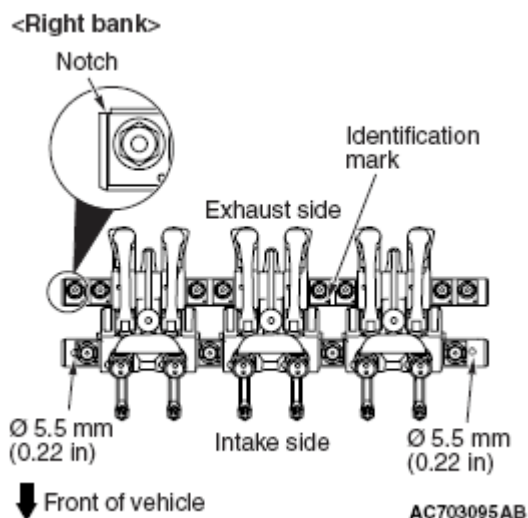


Fig. 51: Identifying Identification Mark Right Bank (Exhaust Side And Intake Side)
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

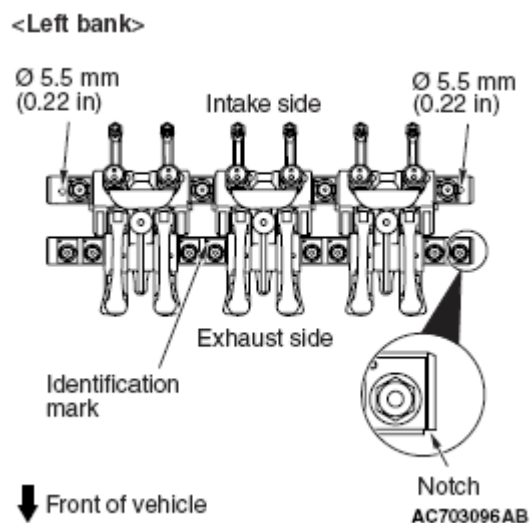


Fig. 52: Identifying Identification Mark Left Bank (Exhaust Side And Intake Side)
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

6. Remove special tool MD998443.

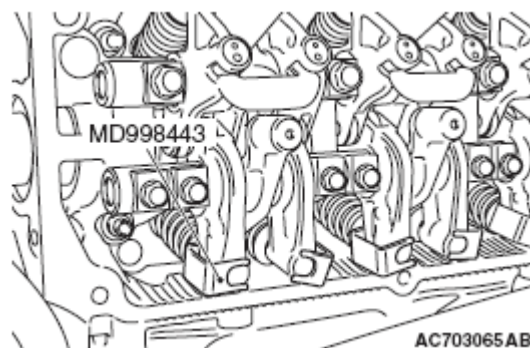


Fig. 53: Identifying Special Tool MD998443
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> E << ROCKER COVER INSTALLATION

Tighten the bolts in order of the numbers shown in the illustration.

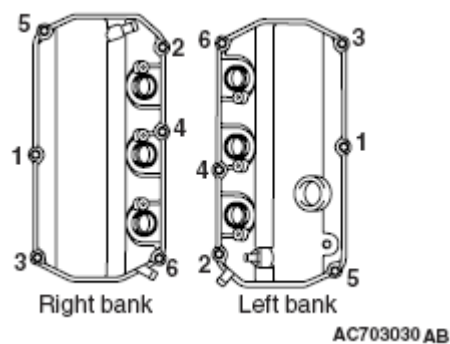


Fig. 54: Identifying Rocker Cover Bolts Tighten Sequence
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> F << CAMSHAFT OIL SEAL INSTALLATION

1. Apply engine oil to the camshaft oil seal lip.
2. Use special tools MD998713 and MD998777 to press-fit the camshaft oil seal.

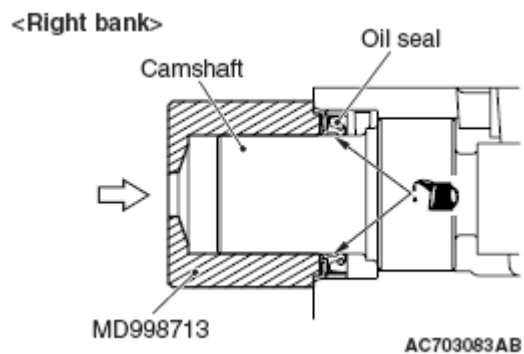


Fig. 55: Installing Camshaft Oil Seal (Right Bank)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

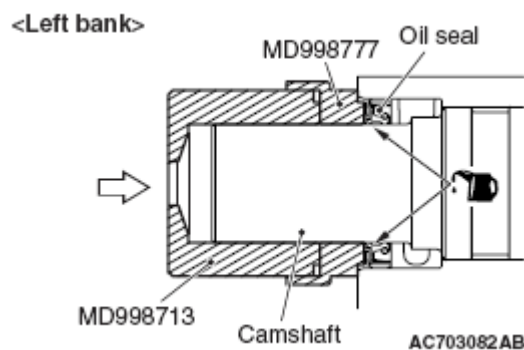


Fig. 56: Installing Camshaft Oil Seal (Left Bank)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> G << CAMSHAFT SPROCKET INSTALLATION

1. Use special tools MB990767 and MD998719 in the same way as during removal to install the camshaft sprocket.
2. Tighten the camshaft sprocket mounting bolt to the specified torque.

Tightening torque: 90 ± 10 N.m (67 ± 7 ft-lb)

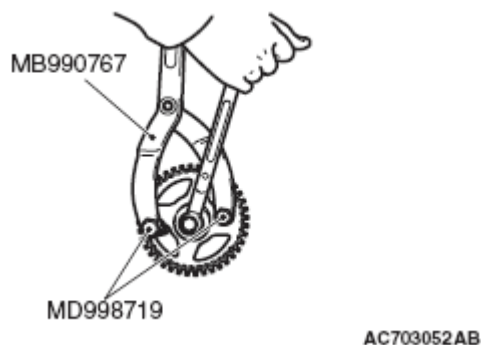


Fig. 57: Installing Camshaft Sprocket With Special Tools MB990767 And MD998719
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> H << ENGINE OIL PRESSURE SWITCH INSTALLATION

Apply the specified sealant to the thread of the engine oil pressure switch.

Specified sealant: Three bond 1215 or equivalent

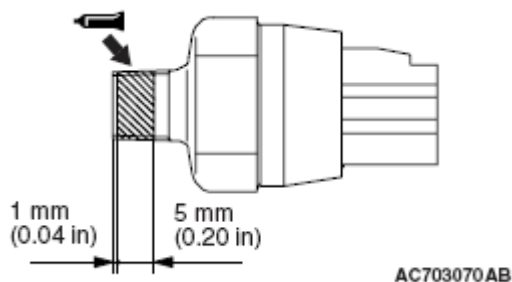


Fig. 58: Applying Sealant To Thread Of Engine Oil Pressure Switch
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> I << O-RING/ENGINE OIL CONTROL VALVE INSTALLATION


CAUTION:

- **Never re-use the O-ring.**
- **Before installing O-ring, wind sealing tape around the oil passages cut-out area of engine oil control valve, to prevent damage. If the O-ring is damaged, it can cause an oil leak.**

1. Apply a small amount of engine oil to the O-ring and then install it to the engine oil control valve.
2. Install the engine oil control valve to the cylinder head.

3. Tighten the engine oil control valve.

Tightening torque: 11 ± 1 N.m (98 ± 8 in-lb)

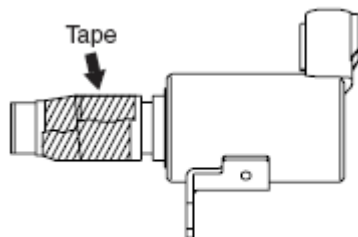

AC703080AB


Fig. 59: Applying Engine Oil To O-Ring And Engine Oil Control Valve
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

OIL PAN AND OIL STRAINER

REMOVAL AND INSTALLATION

Pre-removal and Post-installation Operation

- Engine Room Under Cover Front Removal and Installation
- Engine Oil Draining and Refilling

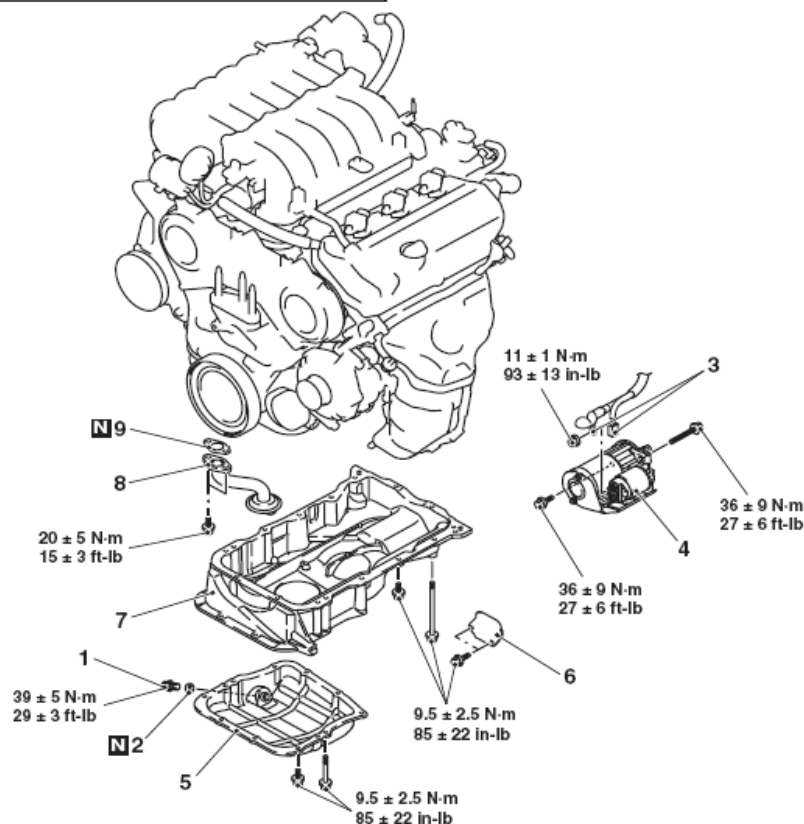

AC709044 AC

Removal steps

- >>C<< 1. Engine oil pan drain plug
 2. Engine oil pan drain plug gasket
 3. Starter connector and terminal
 4. Starter assembly
 <<A>> >>B<< 5. Engine lower oil pan
 • Front exhaust pipe

- >>A<< 6. Cover

Removal steps (Continued)

- A/C compressor assembly
- A/C compressor bracket

<>

<<C>>

>>A<<

7. Engine upper oil pan
 8. Oil strainer
 9. Oil strainer gasket

Fig. 60: Identifying Oil Pan And Oil Strainer Components With Torque Specification
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tool:

MD998727: Oil Pan FIPG Cutter

REMOVAL SERVICE POINTS

<< A >> ENGINE LOWER OIL PAN REMOVAL

Insert the special tool MD998727, into the groove shown in the illustration. Strike and slide it and then cut the liquid gasket.

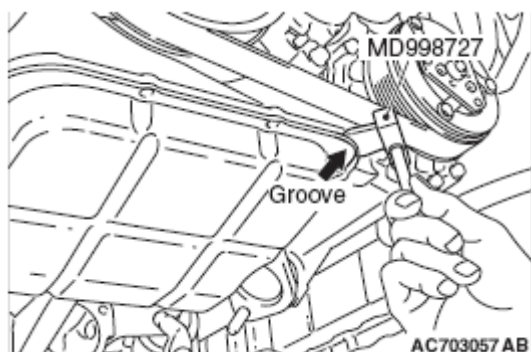


Fig. 61: Inserting Special Tool MD998727 Into Groove
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< B >> A/C COMPRESSOR ASSEMBLY REMOVAL

1. Remove the compressor from the compressor bracket with the hose still attached.
2. Place the removed A/C compressor where it will not be a hindrance when removing and installing the engine assembly, and secure it with a cord or wire.

<< C >> ENGINE UPPER OIL PAN REMOVAL

1. Remove the engine upper oil pan mounting bolts.

CAUTION: Do not use special tool MD998727. The engine upper oil pan is made of aluminum and this tool will damage it.

2. Screw in the bolt (M10 x 1.5) into bolt hole A in the location shown. Then lift the upper oil pan and remove it.

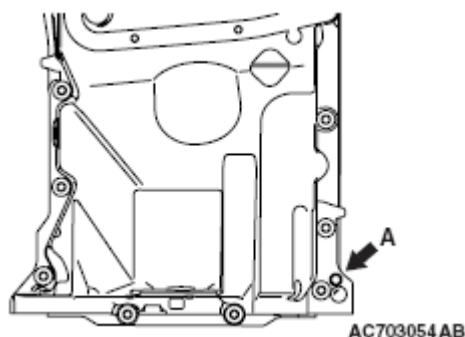


Fig. 62: Identifying Engine Upper Oil Pan Bolt Hole
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

INSTALLATION SERVICE POINTS


>> A << ENGINE UPPER OIL PAN/COVER INSTALLATION

1. Remove sealant from the oil pan and cylinder block mating surfaces.
2. Degrease the sealant-coated surface and the engine mating surface.
3. Apply a bead of the sealant to the cylinder block mating surface of the engine oil pan as shown.

Specified sealant: Three bond 1217G or equivalent

NOTE: The sealant should be applied in a continuous bead approximately 4 mm (0.16 inch) in diameter.

4. Assemble the oil pan to the cylinder block within 15 minutes after applying the sealant.

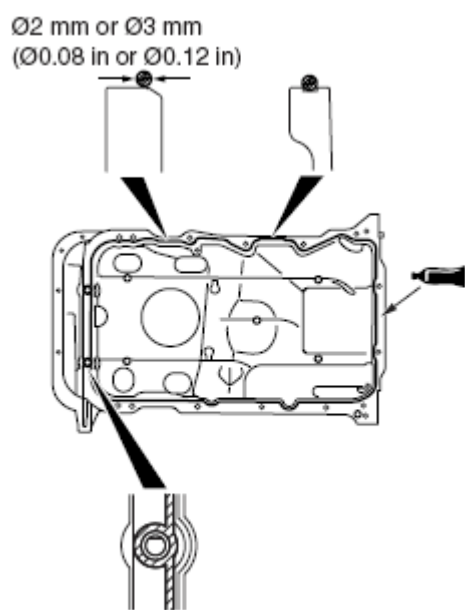


AC703031AB

Fig. 63: Applying Bead Of Sealant To Cylinder Block Mating Surface Of Engine Oil Pan
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

5. Install the bolts to the engine upper oil pan and cover as shown, and tighten them to the specified torque.

Tightening torque: 9.5 ± 2.5 N.m (85 ± 22 in-lb)

Bolt specifications

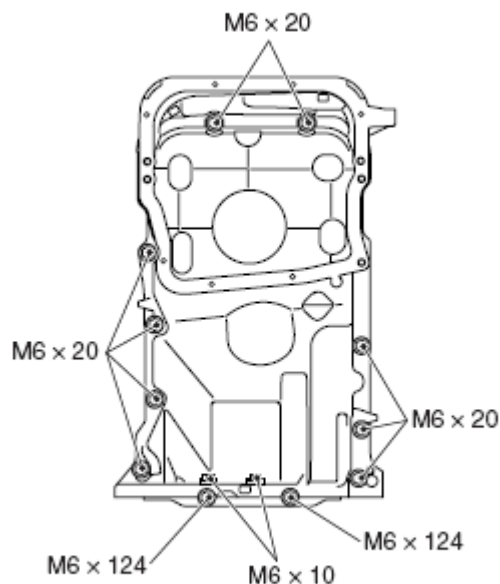

Thread diameter x Length mm

AC703032AB

Fig. 64: Identifying Engine Upper Oil Pan Bolt Torque

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> B << ENGINE LOWER OIL PAN INSTALLATION

1. Remove sealant from the engine lower oil pan and engine upper oil pan.
2. Apply a bead of the sealant to the mating surface of the engine lower oil pan as shown.

Specified sealant: Three bond 1217G or equivalent

NOTE: Install the engine lower oil pan within 15 minutes after applying sealant.

3. Assemble the engine lower oil pan to the engine upper oil pan.

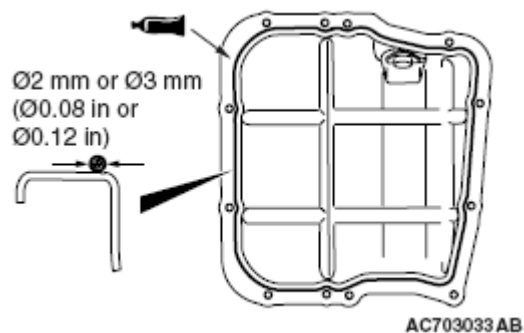



Fig. 65: Applying Bead Of Sealant To Mating Surface Of Engine Lower Oil Pan

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

4. Install the bolts to the lower oil pan as shown, and tighten them to the specified torque.

Tightening torque: 9.5 ± 2.5 N.m (85 ± 22 in-lb)

Bolt specifications

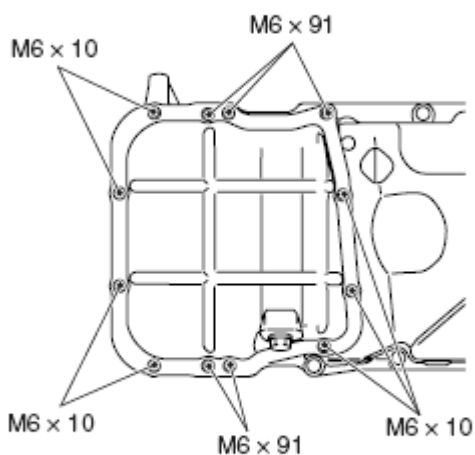

Thread diameter x Length mm


AC703034AB

Fig. 66: Identifying Lower Oil Pan Bolt

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> C << ENGINE OIL PAN DRAIN PLUG INSTALLATION

Replace the gasket with a new gasket. Install the new gasket in the direction shown in **Fig. 67**.

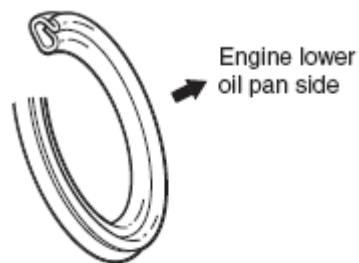

AC703071AB

Fig. 67: Identifying Engine Lower Oil Pan Side

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

INSPECTION

- Check the engine oil pan for cracks.



- Check the engine oil pan sealant-coated surface for damage and deformation.
- Check the oil strainer for cracked, clogged or damaged wire net and pipe.

CRANKSHAFT FRONT OIL SEAL

REMOVAL AND INSTALLATION

Pre-removal and Post-installation Operation

- Timing Belt Removal and Installation

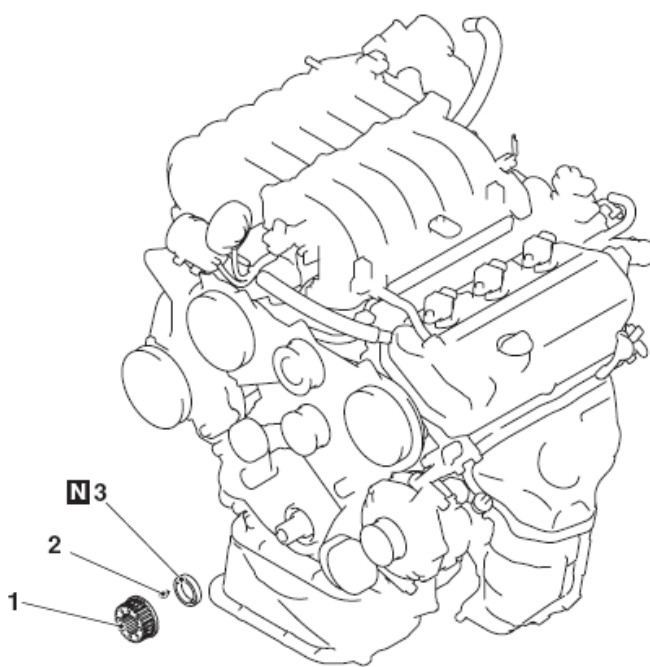

AC703045 AB

>>B<< Removal steps
1. Crankshaft sprocket

Removal steps (Continued)
2. Key
>>A<< 3. Crankshaft front oil seal

Fig. 68: Identifying Crankshaft Front Oil Seal

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tool:

- MD998382: Crankshaft Front Oil Seal Installer

INSTALLATION SERVICE POINTS

>> A << CRANKSHAFT FRONT OIL SEAL INSTALLATION

1. Apply a small amount of engine oil to the oil seal lip and then insert the o-ring.
2. Using special tool MD998382, tap the oil seal into the front case.

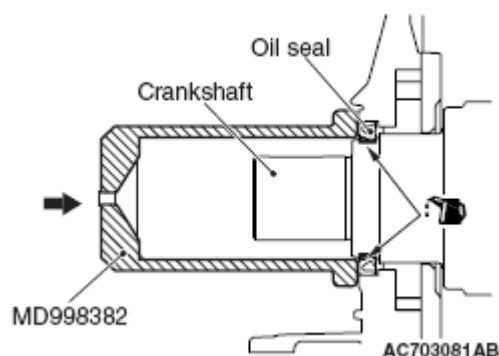


Fig. 69: Applying Engine Oil To Oil Seal Lip
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> B << CRANKSHAFT SPROCKET INSTALLATION

Clean the crankshaft and crankshaft sprocket, and mount them.

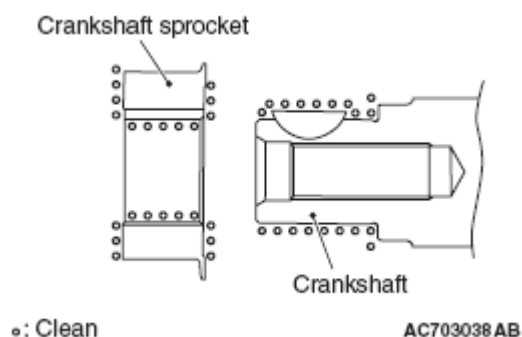


Fig. 70: Identifying Crankshaft And Crankshaft Sprocket
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

CRANKSHAFT REAR OIL SEAL

REMOVAL AND INSTALLATION

Pre-removal and Post-installation Operation
• Transaxle Assembly Removal and Installation

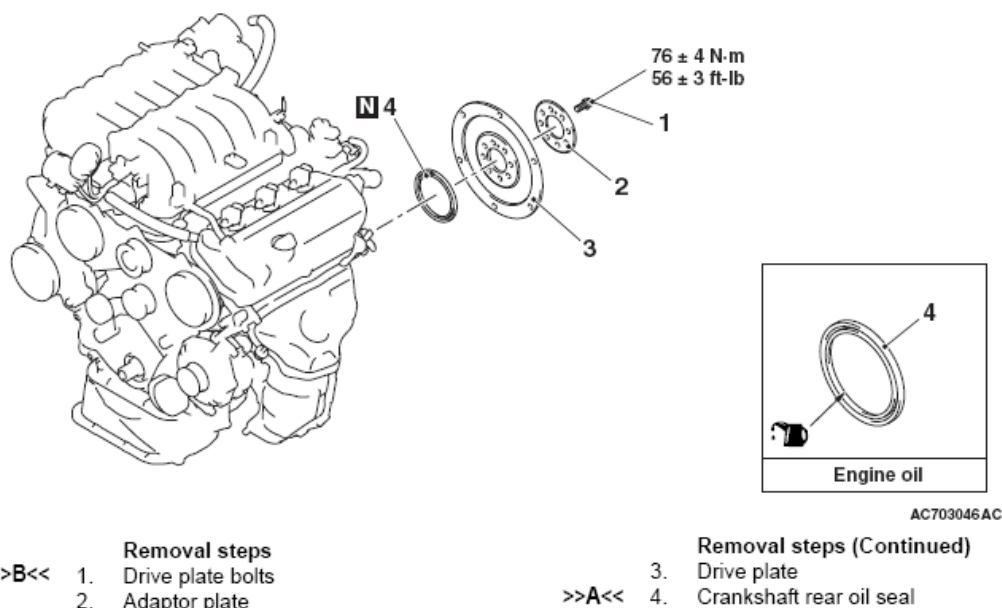


Fig. 71: Identifying Crankshaft Rear Oil Seal With Torque Specifications
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tools:

- MB992075: Handle
- MB992183: Crankshaft Rear Oil Seal Installer
- MD998781: Flywheel Stopper

REMOVAL SERVICE POINT

<< A >> DRIVE PLATE BOLTS REMOVAL

Use special tool MD998781 to secure the drive plate and remove the drive plate bolts.

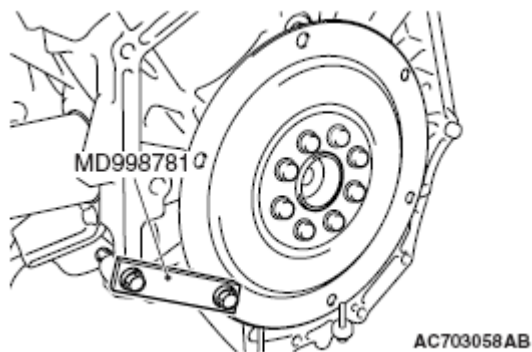
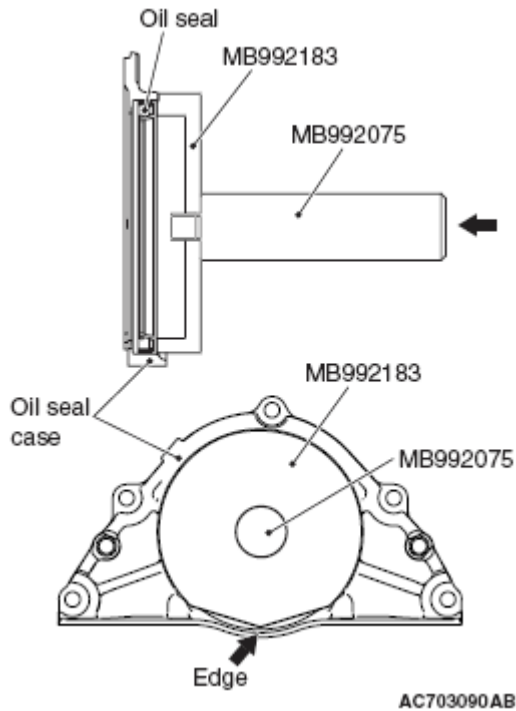


Fig. 72: Identifying Special Tool MD998781**Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.****INSTALLATION SERVICE POINTS****>> A << CRANKSHAFT REAR OIL SEAL INSTALLATION**

Use special tool MB992075 and MB992183, press-fit a new crankshaft rear oil seal into the oil seal case.

**Fig. 73: Locating Special Tool MB992075 And MB992183****Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.****>> B << DRIVE PLATE BOLTS INSTALLATION**

1. Cleanly remove sealant, oil and dust on the drive plate bolt, the drive plate and the threaded portions of the crankshaft.
2. Apply oil to the drive plate and the seating surface of the drive plate bolt.
3. Apply oil to the threaded hole of the crankshaft
4. Apply sealant to the thread of the drive plate bolts.

Specified sealant: Three bond 1324 or equivalent

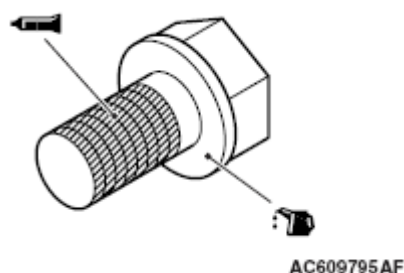


Fig. 74: Applying Sealant To Thread Of Drive Plate Bolts
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

5. Use special tool MD998781 to secure the drive plate in the same manner as removal.
6. Tighten the drive plate bolts to the specified torque.

Tightening torque: 74 ± 1 N.m (54 ± 1 ft-lb)

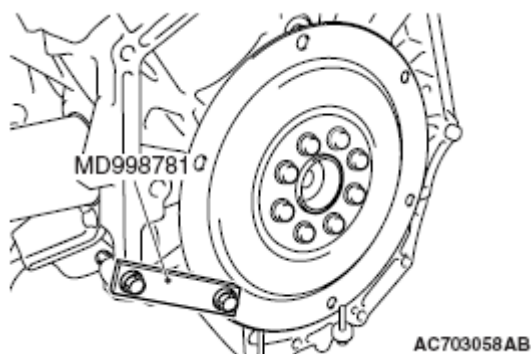



Fig. 75: Identifying Special Tool MD998781
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

CYLINDER HEAD GASKET

REMOVAL AND INSTALLATION

Pre-removal and Post-installation Operation

- Intake Manifold Removal and Installation
- Exhaust Manifold Removal and Installation
- Timing Belt Removal and Installation
- Thermostat Housing Removal and Installation
- Generator Removal and Installation

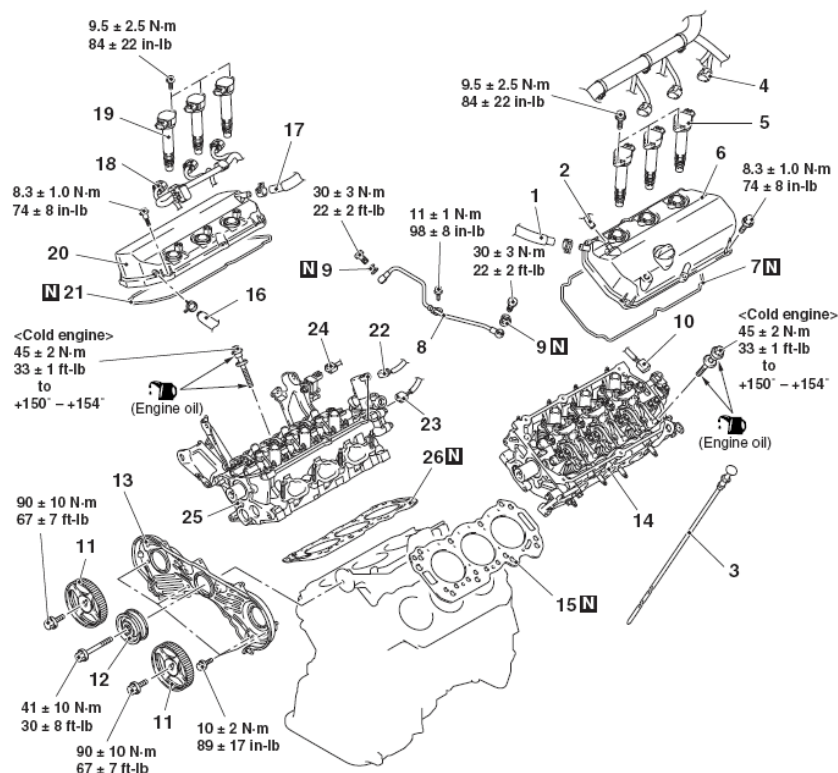

AC703051AB

- Removal steps**
1. Blow-by hose connection
 2. PCV hose connection
 3. Engine oil dipstick

Removal steps (Continued)

4. Ignition coil connector
5. Ignition coil
6. Rocker cover
7. Rocker cover gasket
8. Oil pipe
9. Gasket
10. Camshaft position sensor connector

11. Camshaft sprocket
12. Idler pulley
13. Timing belt rear cover
14. Left bank cylinder head assembly
15. Cylinder head gasket
16. Blow-by hose connection
17. Breather hose connection
18. Ignition coil connector
19. Ignition coil
20. Rocker cover
21. Rocker cover gasket
22. Engine oil control valve connector
23. Engine oil pressure switch connector
24. Solenoid valve connector
25. Right bank cylinder head assembly
26. Cylinder head gasket

<<A>> >>B<<

<> >>A<<

<> >>A<<

Fig. 76: Exploded View Of Cylinder Head & Components With Torque Specifications
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tools:

- MB990767: End Yoke Holder
- MB991614: Angle Gauge
- MD998719: Pin

REMOVAL SERVICE POINTS

<< A >> CAMSHAFT SPROCKET REMOVAL

Use special tools MB990767 and MD998719 to remove the camshaft sprocket.

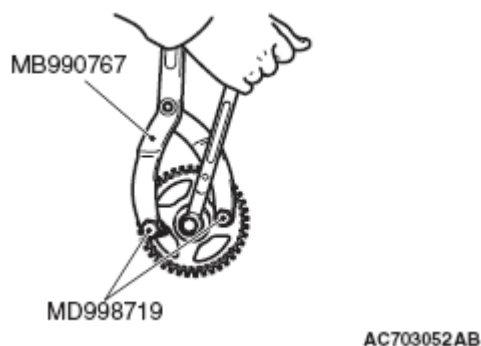


Fig. 77: Removing Camshaft Sprocket With Special Tools MB990767 And MD998719
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< B >> CYLINDER HEAD ASSEMBLY REMOVAL

Loosen the bolts in two or three steps in the order of the numbers shown in **Fig. 78**, and remove them.

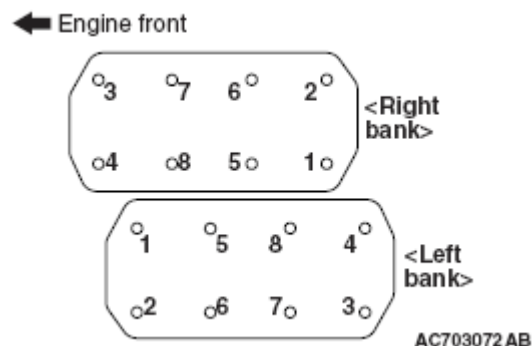


Fig. 78: Identifying Cylinder Head Bolt Loosen Sequence
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

INSTALLATION SERVICE POINTS

>> A << CYLINDER HEAD ASSEMBLY INSTALLATION

CAUTION: Be careful that no foreign material gets into the cylinder, coolant passages or oil passages. Engine damage may result.

1. Use a scraper to clean the gasket surface of the cylinder head assembly.
2. Check in the following procedure before reusing the cylinder head bolt.
 1. Measure the outside diameter "A".
 2. Measure the smallest outside diameter "B" within the range "X" shown in the illustration.
 3. If the difference of outside diameter of thread exceeds the limit, replace the cylinder head bolt.

Limit: 0.1 mm (0.0039 inch)

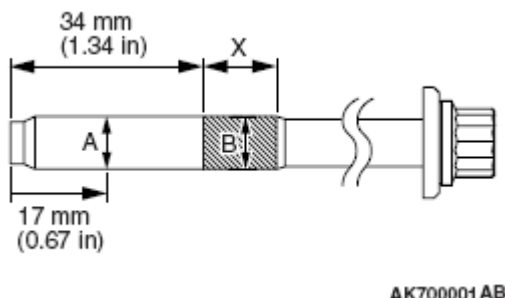


Fig. 79: Identifying Cylinder Head Bolt Dimension

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

3. Tighten the bolts to the specified torque in the order shown in the illustration (in two or three cycles)

Tightening torque: 45 ± 2 N.m (33 ± 1 ft-lb)

CAUTION:

- If the bolt is turned less than 150 to 154 degrees, proper fastening performance may not be achieved. Be sure to turn the bolt exactly 150 to 154 degrees.
- If the bolts is overtightened, loosen the bolt completely and then retighten it by repeating the tightening procedure from step 1.

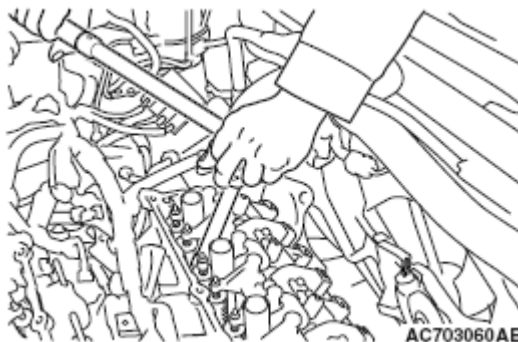


Fig. 80: Tightening Cylinder Head Bolt

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

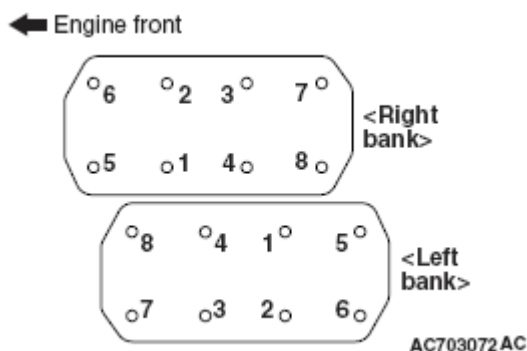


Fig. 81: Identifying Cylinder Head Bolt Tighten Sequence
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

- Using special tool MB991614, tighten the cylinder head bolt another 150 to 154 degrees.

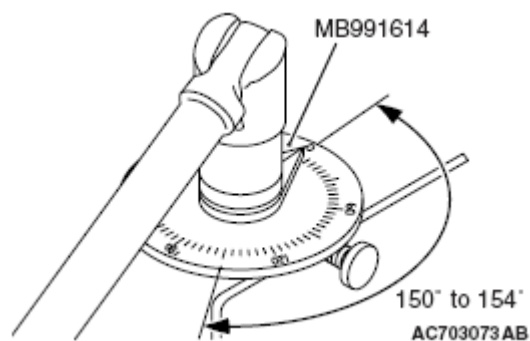


Fig. 82: Tightening Cylinder Head Bolt With Special Tool MB991614
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> B << CAMSHAFT SPROCKET INSTALLATION

- Use special tools MB990767 and MD998719 in the same way as during removal to install the camshaft sprocket.
- Tighten the camshaft sprocket mounting bolt to the specified torque.

Tightening torque: 90 ± 10 N.m (67 ± 7 ft-lb)


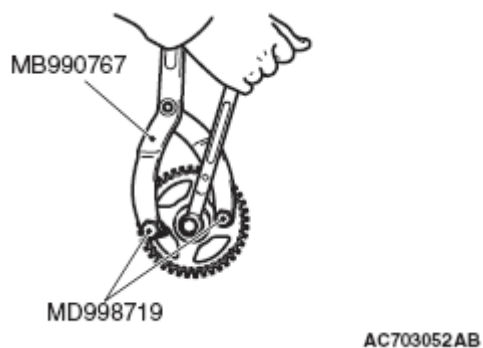


Fig. 83: Installing Camshaft Sprocket With Special Tools MB990767 And MD998719
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

TIMING BELT

REMOVAL AND INSTALLATION

Pre-removal Operation - Engine Cover Removal - Engine Room Under Cover Front and Engine Room Side Cover Removal	Post-installation Operation - Drive Belt Tension Check and Adjustment - Engine Room Under Cover Front and Engine Room Side Cover Installation - Engine Cover Installation
---	--

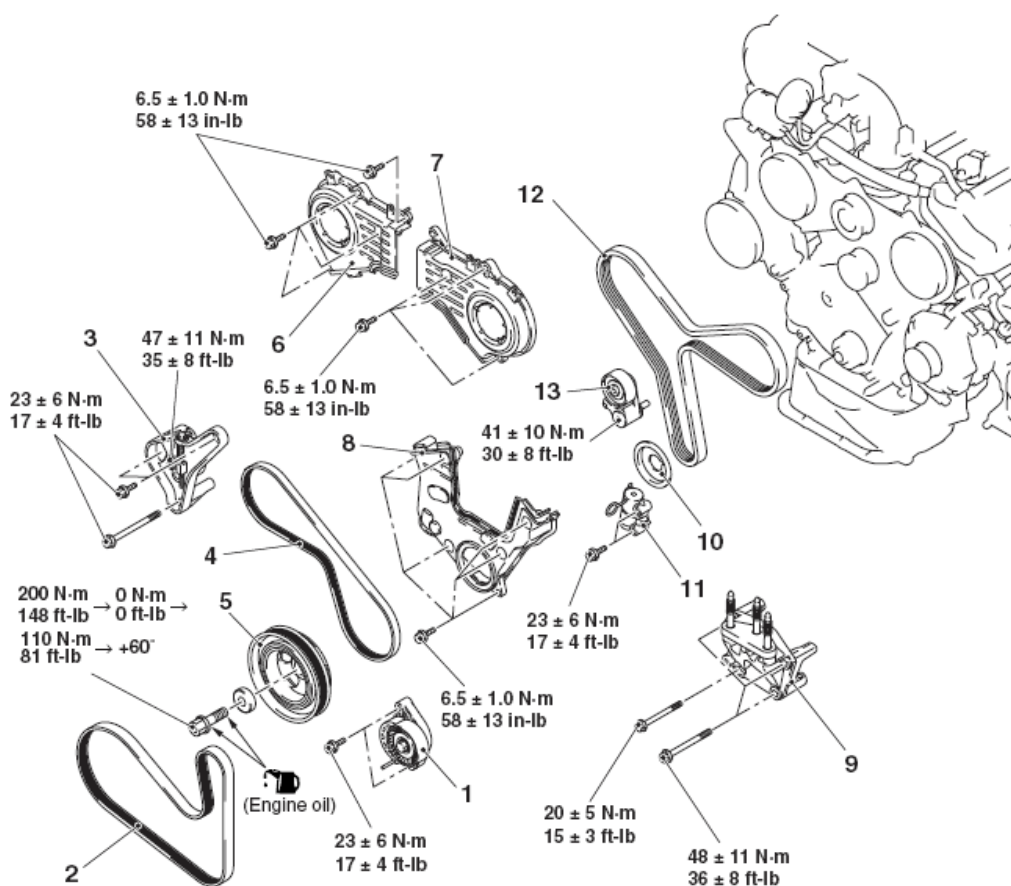

AC703048AB

Removal steps		Removal steps (Continued)	
<<A>>	1. Drive belt auto-tensioner	8.	Timing belt lower cover
<<A>>	2. Generator drive belt	•	Engine mounting bracket
	3. Power steering tensioner pulley bracket		
	4. Power steering oil pump drive belt	9.	Engine support bracket
<> >>B<<	5. Crankshaft pulley	10.	Front flange
	6. Timing belt front upper cover, right	11.	Timing belt auto-tensioner
	7. Timing belt front upper cover, left	12.	Timing belt
		13.	Tensioner pulley assembly

Fig. 84: Timing Belt Components With Torque Specifications

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tools:

- MB990767: End Yoke Holder
- MD998716: Crankshaft Wrench
- MD998719: Pin

REMOVAL SERVICE POINTS**<< A >> DRIVE BELT AUTO-TENSIONER/GENERATOR DRIVE BELT REMOVAL**

CAUTION: When the generator drive belt is reused, draw an arrow indicating the rotating direction on the back of the belt using chalk to install the same direction.

1. Turn the drive belt auto-tensioner to counterclockwise, and insert the L-shaped hexagon wrench to the auto-tensioner hole in order to fix the auto-tensioner.
2. Remove the generator drive belt.
3. Remove the drive belt auto-tensioner.

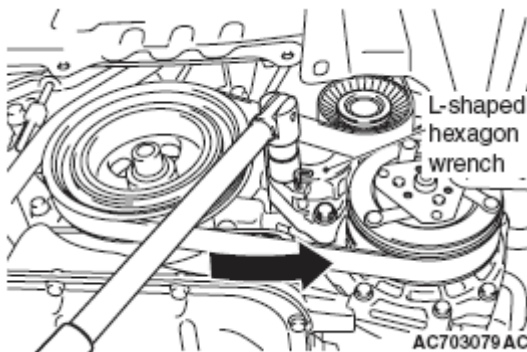


Fig. 85: Removing Generator Drive Belt

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< B >> CRANKSHAFT PULLEY REMOVAL

CAUTION: Use only the specified special tools, or a damaged pulley damper could result.

Use special tools MB990767 and MD998719 to remove the crankshaft pulley from the crankshaft.

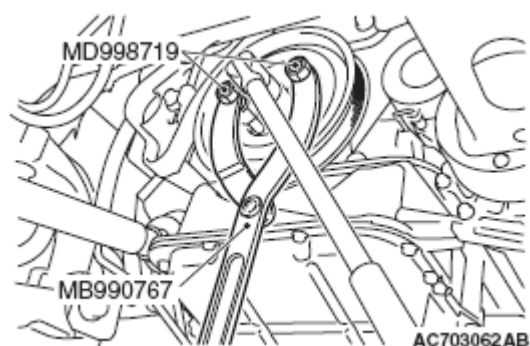


Fig. 86: Removing Crankshaft Pulley And Crankshaft
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< C >> TIMING BELT AUTO-TENSIONER REMOVAL

1. Remove the upper tightening bolt of the auto-tensioner.

CAUTION: The auto-tensioner rotates centering on the flange bolt due to the rod thrust, so please make sure your finger is not trapped.

2. Loosen the lower tightening bolt of the auto-tensioner slowly and slide the auto-tensioner slightly. Remove the rod from the tensioner arm.
3. Remove the lower tightening bolt of the auto-tensioner.

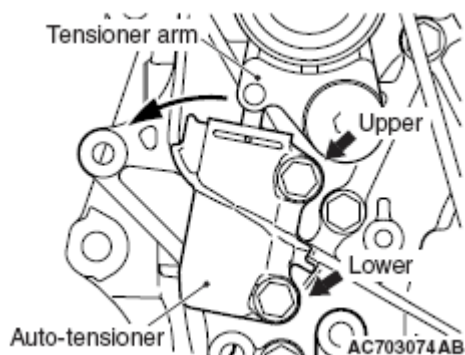



Fig. 87: Removing Upper Tightening Bolt Of Auto-Tensioner
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< D >> TIMING BELT REMOVAL

CAUTION: Never turn the crankshaft counterclockwise.

1. Turn the crankshaft clockwise to align each timing mark and to set the number 1 cylinder to compression top dead center.

2. If the timing belt is to be reused, chalk an arrow on the flat side of the belt, indicating the clockwise direction.
3. Loosen the center bolt of the tensioner pulley, then remove the timing belt.

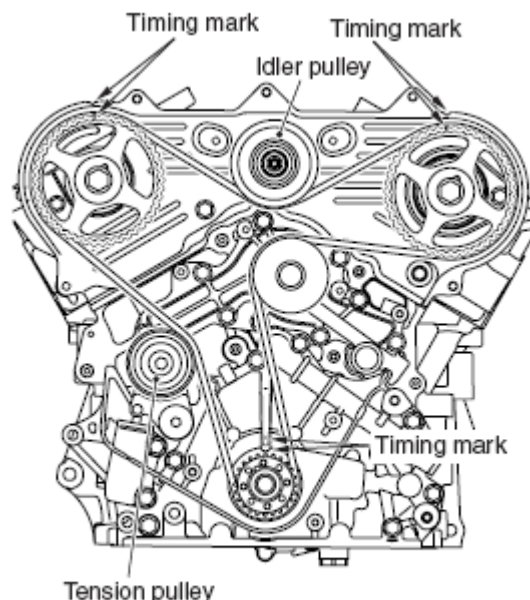

AC703035AB

Fig. 88: Identifying Timing Belt Mark Location

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

INSTALLATION SERVICE POINTS**>> A << TIMING BELT/TIMING BELT AUTO-TENSIONER INSTALLATION**

CAUTION: Always bleed the auto-tensioner of air before installing the auto-tensioner.
Refer to **>> B << CRANKSHAFT PULLEY INSTALLATION**.

Insert the pin into the rod of the auto-tensioner under the following procedures.

CAUTION: Notable factors for inserting pin

- Always use the vertical press and put the auto-tensioner vertically.
- Do not apply the load of 5,000 N (1,124 pound) or more to the rod.
- Do not press the rod beyond the dimension shown in the illustration.

1. Put the auto-tensioner vertically to the vertical press not to be in the sideways direction.

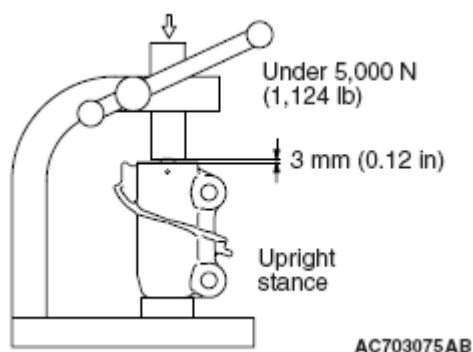


Fig. 89: Inserting Pin Into Rod Of Auto-Tensioner
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

2. Slowly close the vice to force the rod in until the hole (A) of the rod is lined up with set hole (B) of the cylinder.
3. Insert a pin into the set holes.
4. Remove the auto-tensioner from the vice.

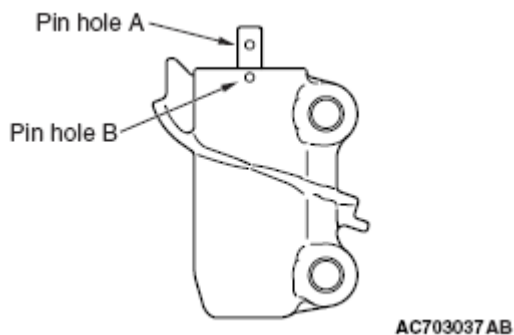


Fig. 90: Identifying Pin Hole A and Pin Hole B
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

5. Align the timing marks on the camshaft sprockets with those on the timing belt rear cover and the timing mark on the crankshaft sprocket with that on the engine block as shown in the illustration.

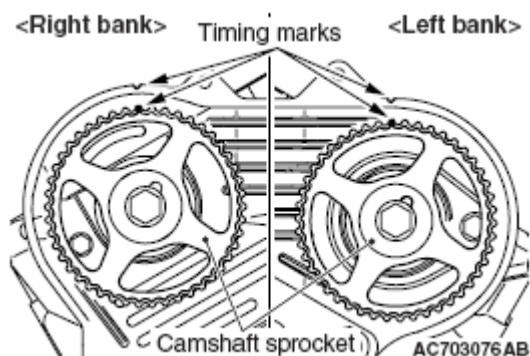


Fig. 91: Aligning Timing Marks On Camshaft Sprockets With Timing Belt

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.


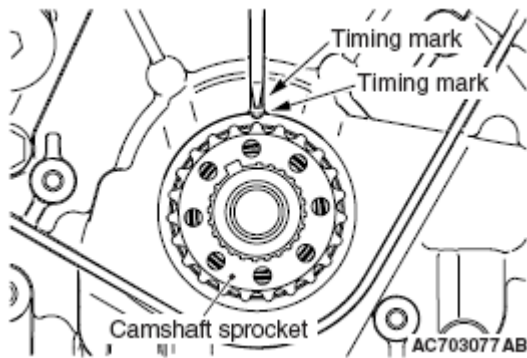


Fig. 92: Identifying Timing Mark On Crankshaft Sprocket With Engine Block

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

CAUTION: The camshaft sprocket (right bank) can turn easily due to the spring force applied, so be careful not to get your fingers caught.

6. Install the timing belt by the following procedure so that there is no deflection in the timing belt between each sprocket and pulley.
 1. Crankshaft sprocket
 2. Water pump pulley
 3. Camshaft sprocket (Left bank)
 4. Idler pulley
 5. Camshaft sprocket (Right bank)
 6. Tensioner pulley
7. Turn the camshaft sprocket (Right bank) counterclockwise until the tension side of the timing belt is firmly stretched. Check all the timing marks again.

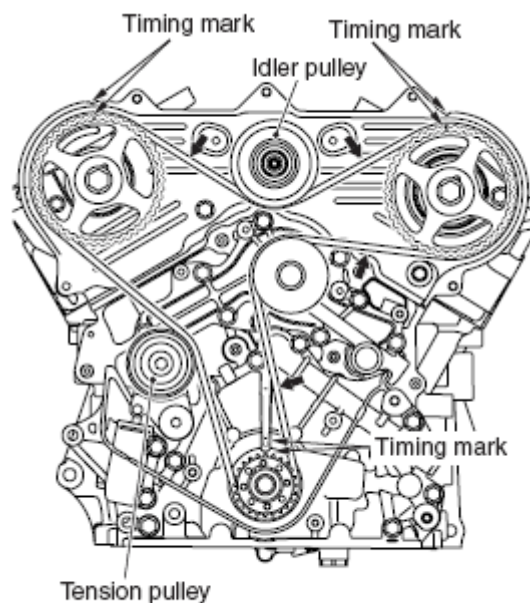

AC703035AC

Fig. 93: Identifying Timing Mark Of Idler Pulley And Tension Pulley
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

8. Use special tool MD998716 to turn the crankshaft 1/4 turn counterclockwise, then turn it again clockwise until the timing marks are aligned.
9. Remove the setting pin that has been inserted into the auto-tensioner.
10. Turn the crankshaft clockwise twice to align the timing marks.

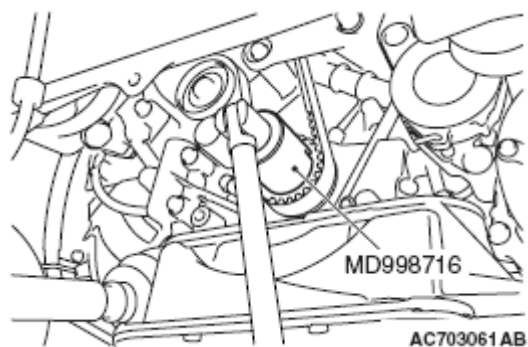



Fig. 94: Turning Crankshaft Clockwise
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

11. Wait for at least five minutes, then check that the auto-tensioner pushrod extends within the standard value range.

Standard value (A): 9.1-13.4 mm (0.36-0.52 inch)

12. If not, repeat the operation in steps 1 to 6 above.

13. Check again that the timing marks of the sprockets are aligned.

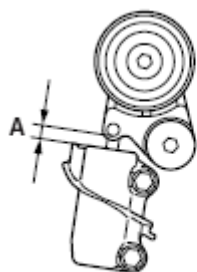

AC703036AB

Fig. 95: Checking Auto-Tensioner Pushrod Extends With Standard Value Range
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> B << CRANKSHAFT PULLEY INSTALLATION

Use special tools MB990767 and MD998719 to install the crankshaft pulley.

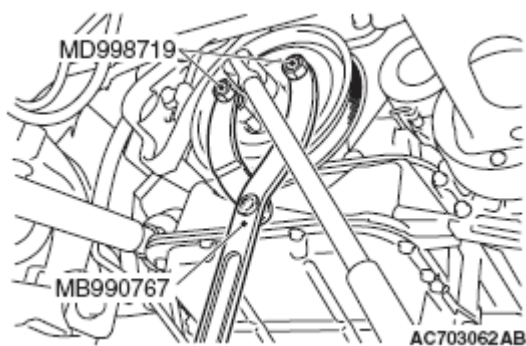


Fig. 96: Installing Crankshaft Pulley And Crankshaft
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

INSPECTION

TIMING BELT AUTO-TENSIONER CHECK

1. Check for oil leak from seal, and replace it if leak is detected.
2. Check for wear or damage at the top of the rod. Replace if required.

AIR BLEEDING METHOD

CAUTION:

- Always use the vertical press and put the auto-tensioner vertically.
- Do not apply the load of 5,000 N (1,124 pound) or more to the rod.
- Do not press the rod beyond Dimension "A" shown in the illustration.

1. Set the auto-tensioner as shown in the illustration.

2. Press the rod slowly down to the lowest point "A" shown in the illustration.
3. Repeat the procedure 2 three times.
4. While the rod is projected at the point "B" shown in the illustration, push the rod with 100-200 N (22-44 pound). Check the enough stiffness. If the stiffness is not enough, replace the auto-tensioner.
5. Press down the rod slowly. Put the pin through the hole and secure it.

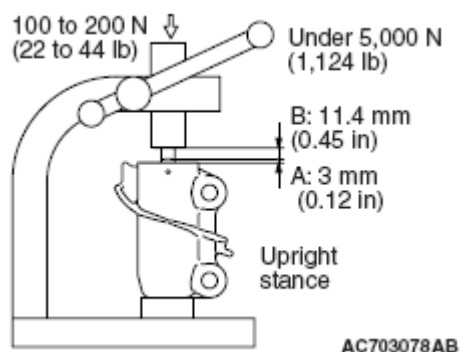


Fig. 97: Setting Auto-Tensioner

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

ENGINE ASSEMBLY

REMOVAL AND INSTALLATION


CAUTION:

- When the engine assembly replacement is performed, use scan tool MB991958 to initialize the learning value. Refer to INITIALIZATION PROCEDURE FOR LEARNING VALUE IN MFI ENGINE .

2008 Mitsubishi Outlander ES

2008 ENGINE Engine Mechanical (3.0L) - Outlander

Pre-removal Operation	Post-installation Operation
- Engine Room Under Cover Front and Engine Room Side Cover Removal - Fuel Line Pressure Reduction - Engine Coolant Draining - Engine Oil Draining - Transmission Fluid Draining - Transfer Oil Draining - Hood Removal - Engine Cover Removal - Air Cleaner Removal - Engine Control Module (ECM) Removal - Battery and Battery Tray Removal - Front Exhaust Pipe and Front Exhaust Pipe RH Removal - Strut Tower Bar Removal - Driveshaft Removal - Propeller Shaft Removal - Pressure Hose Assembly and Return Tube B Removal - Rear Roll Stopper Removal - Transfer Removal - Starter Removal - Radiator Upper Hose and Radiator Lower Hose Removal	- Radiator Upper Hose and Radiator Lower Hose Installation - Starter Installation - Transfer Installation - Rear Roll Stopper Installation - Pressure Hose Assembly and Return Tube B Installation - Propeller Shaft Installation - Driveshaft Installation - Strut Tower Bar Installation - Front Exhaust Pipe and Front Exhaust Pipe RH Installation - Battery and Battery Tray Installation - Engine Control Module (ECM) Installation - Air Cleaner Installation - Drive Belt Tension Check and Adjustment - Engine Oil Refilling - Transmission Fluid Refilling - Transfer Oil Refilling - Engine Coolant Refilling - Fuel Leak Check - Hood Installation - Engine Cover Installation - Engine Room Under Cover Front and Engine Room Side Cover Installation

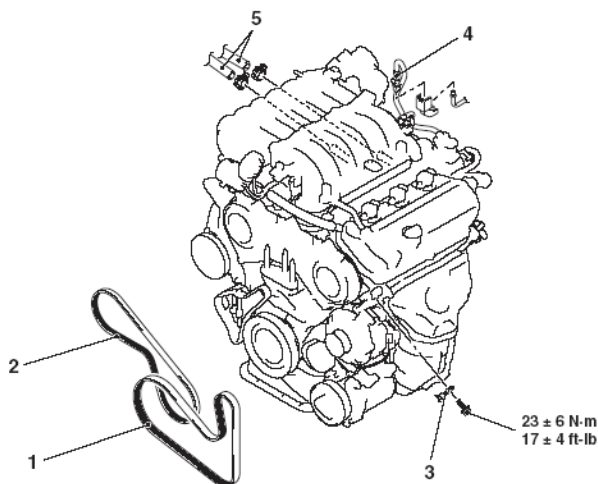


Removal steps

1. Generator drive belt
2. Power steering oil pump drive belt
3. Grounding cable connection
4. Fuel high-pressure hose connection
5. Heater hose connection

Removal steps (Continued)

- Intake manifold plenum
- Right bank exhaust manifold

Fig. 98: Identifying Engine Assembly With Torque Specification (1 Of 2)
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

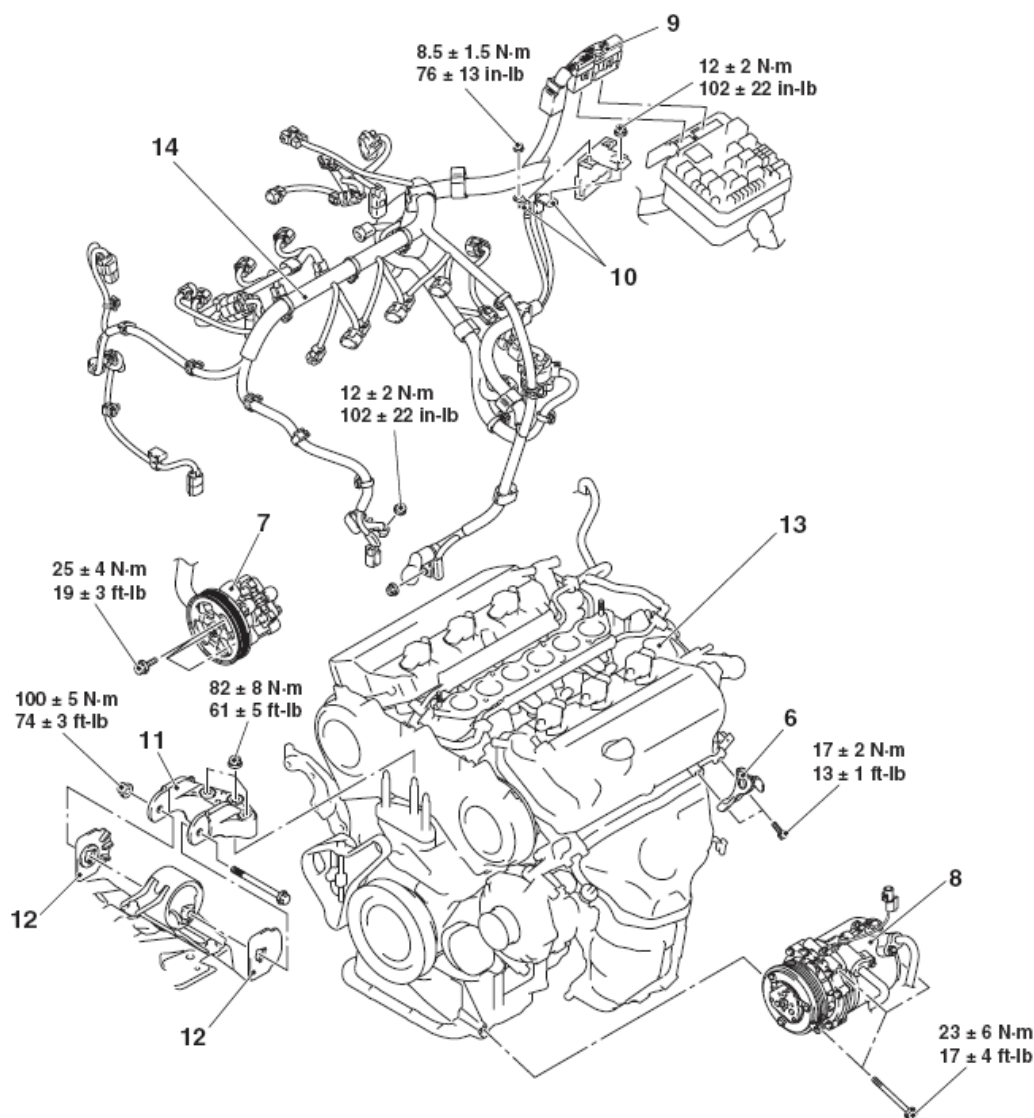

AC703068 AC

Removal steps		Removal steps (Continued)	
<>	>>B<<	•	Transaxle assembly
<<C>>		<<E>>	>>A<<
<<D>>		<<F>>	>>A<<
	6.		11.
	7.		12.
	8.		13.
	9.		14.

Fig. 99: Identifying Engine Assembly With Torque Specification (2 Of 2)
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

Required Special Tools:

- MB991454: Engine Hanger Balancer
- MB991895: Engine Hanger

- MB991928: Engine Hanger
- MB992208: Engine Hanger Plate A

REMOVAL SERVICE POINTS

<< A >> FUEL HIGH-PRESSURE HOSE DISCONNECTION

1. Remove the fuel high-pressure hose stopper.

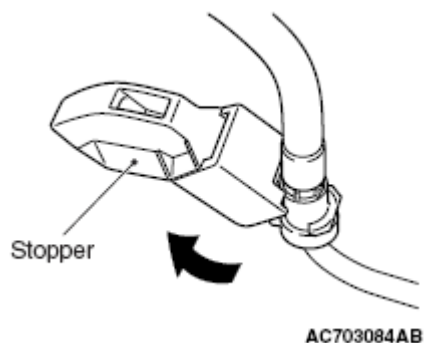


Fig. 100: Removing Fuel High-Pressure Hose Stopper
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

2. Remove the fuel high-pressure hose in the direction shown in the figure while the retainer is pulled up.

NOTE: If the retainer is released, install it after removing the fuel high-pressure hose.

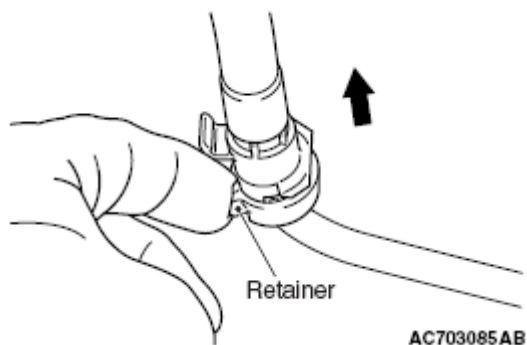


Fig. 101: Removing Fuel High-Pressure Hose
Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< B >> TRANSAXLE ASSEMBLY REMOVAL

Remove the transaxle assembly. Refer to TRANSAXLE ASSEMBLY .

<< C >> POWER STEERING OIL PUMP ASSEMBLY REMOVAL


1. Remove the power steering oil pump from the engine with the hose attached.
2. Place the removed power steering oil pump in a place where it will not be a hindrance when removing and installing the engine assembly, and secure it with a cord or wire.

<< D >> A/C COMPRESSOR ASSEMBLY REMOVAL

1. Remove the compressor from the compressor bracket with the hose still attached.
2. Place the removed A/C compressor where it will not be a hindrance when removing and installing the engine assembly, and secure it with a cord or wire.

<< E >> ENGINE MOUNTING BRACKET REMOVAL


1. Support the engine with a garage jack.
2. Engine hanger MB991895 is used
3. Remove special tool MB991895.

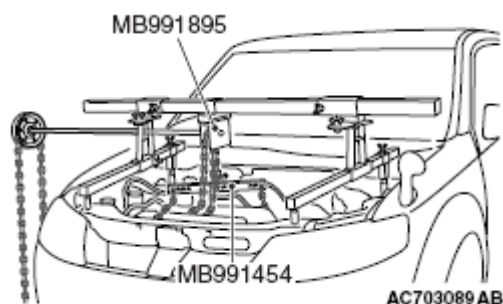**Fig. 102: Identifying Engine Hanger MB991895****Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.**

4. Engine hanger MB991928 is used

Remove special tool MB991928.

5. When removing the transaxle assembly, remove the special tool MB992208 (Right bank) that supported the engine assembly.

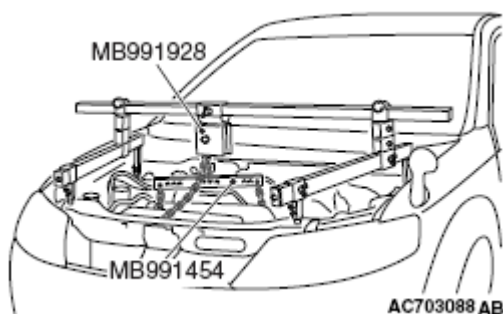**Fig. 103: Identifying Engine Hanger MB991928****Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.**

6. Mount the special tool MB991454 to the engine right hanger and special tool MB992208 (Left bank), and support the engine assembly using the chain block or others.
7. Place a garage jack against the engine oil pan with a piece of wood in between so that the weight of the engine is no longer being applied to the engine mounting bracket.
8. Loosen the engine mount mounting nuts and bolt, and remove the engine mounting bracket.

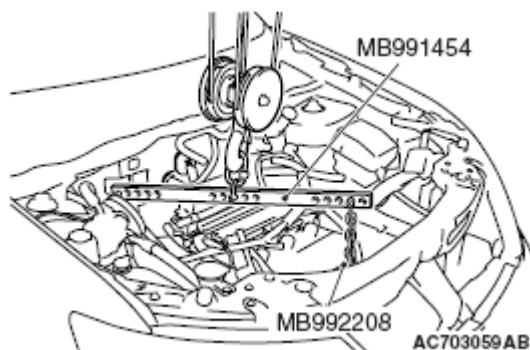


Fig. 104: Identifying Special Tool MB991454 And Special Tool MB992208
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

<< F >> ENGINE ASSEMBLY REMOVAL

After checking that all cables, hoses and wiring harness connectors and so on are disconnected from the engine, lift the chain block slowly to remove the engine assembly upward from the engine compartment.

INSTALLATION SERVICE POINTS

>> A << ENGINE ASSEMBLY/ENGINE MOUNTING INSULATOR STOPPER/ENGINE MOUNTING BRACKET INSTALLATION

1. Install the engine assembly, being careful not to pinch the cables, hoses or wiring harness connectors.
2. Support the engine assembly with a garage jack.

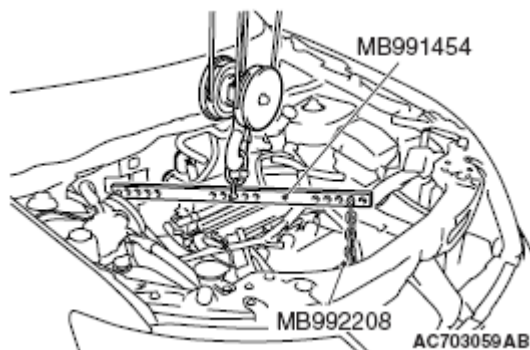


Fig. 105: Identifying Special Tool MB991454 And Special Tool MB992208
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

3. Mount the engine mounting insulator stopper to be positioned as shown in the figure, then mount the

engine mounting bracket.

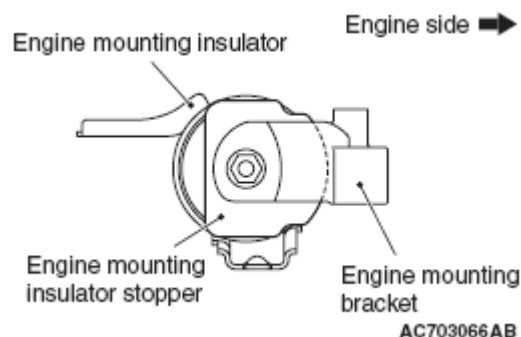


Fig. 106: Identifying Engine Mounting Insulator Stopper
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

>> B << TRANSAXLE ASSEMBLY INSTALLATION

Install the transaxle assembly. Refer to **TRANSAXLE ASSEMBLY** .

>> C << FUEL HIGH-PRESSURE HOSE CONNECTION

CAUTION: After connecting the fuel high-pressure hose, slightly pull it to ensure that it is installed securely. Also confirm that there is a play approximately 3 mm (0.12 inch). Then install the stopper securely.

Apply a small amount of engine oil to the fuel line pipe and then install the fuel high-pressure hose.

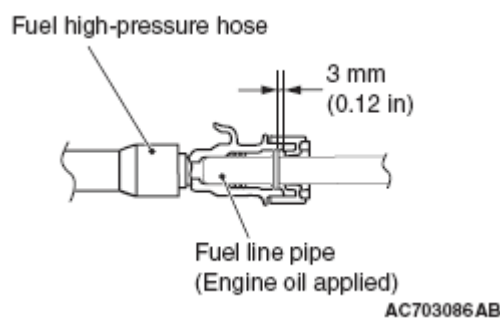


Fig. 107: Identifying Fuel High-Pressure Hose Connection
 Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.

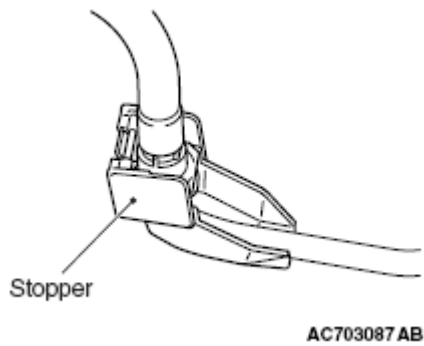


Fig. 108: Identifying Stopper

Courtesy of MITSUBISHI MOTOR SALES OF AMERICA.