

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

2002-04 ENGINES**2.4L 4-Cylinder - Santa Fe****GENERAL****SPECIFICATIONS****GENERAL SPECIFICATIONS**

Description	Specification	Limit
General		
Type	In-line, Double Overhead Camshaft	
Number of cylinders	4	
Bore	86.5 mm (3.41 in.)	
Stroke	100 mm (3.94 in.)	
Total displacement	2351 cc (143.5 cu.in.)	
Compression ratio	10 : 1	
Firing order	1 - 3 - 4 - 2	
Valve timing		
Intake valve		
Open (BTDC)	12°	
Close (ABDC)	56°	
Exhaust valve		
Open (BBDC)	54°	
Close (ATDC)	14°	
Cylinder head		
Flatness of gasket surface	Max. 0.03 mm (0.0012 in.)	0.2 mm (0.008 in.)
Flatness of manifold mounting surface	0.15 mm (0.0059 in.)	0.3 mm (0.012 in.)
Dimensions for reworking oversize valve seat hole		
Intake		
0.3 mm (0.012 in.) O.S.	35.3 ~ 35.325 mm (1.39 ~ 1.3907 in.)	
0.6 mm (0.024 in.) O.S.	35.6 ~ 35.625 mm (1.40 ~ 1.4026 in.)	
Exhaust		
0.3 mm (0.012 in.) O.S.	33.3 ~ 33.325 mm (1.31 ~ 1.3120 in.)	
0.6 mm (0.024 in.) O.S.	33.6 ~ 33.625 mm (1.32 ~ 1.3238 in.)	
Dimensions for reworking oversize valve guide hole (both		

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

intake and exhaust)		
0.05 mm (0.002 in.) O.S.	12.05 ~ 12.068 mm (0.4751 in.)	
0.25 mm (0.010 in.) O.S.	12.25 ~ 12.268 mm (0.4830 in.)	
0.50 mm (0.020 in.) O.S.	12.50 ~ 12.518 mm (0.4928 in.)	
Camshaft		
Cam height		
Intake	35.493 mm (1.3974 in.)	34.993 mm (1.3776 in.)
Exhaust	35.317 mm (1.3904 in.)	34.817 mm (1.3707 in.)
Journal O.D.	26 mm (1.02 in.)	
Bearing oil clearancce	0.040 ~ 0.076 mm (0.0020 ~ 0.0030 in.)	
End play	0.1 ~ 0.15 mm (0.004 ~ 0.006 in.)	
Valve		
Valve length Intake	109.5 mm (4.311 in.)	
Exhaust	109.7 mm (4.319 in.)	
Stem O.D.		
Intake	6.565 ~ 6.580 mm (0.2585 ~ 0.2591 in.)	
Exhaust	6.530 ~ 6.550 mm (0.2571 ~ 0.2579 in.)	
Face angle	45° ~ 45.5°	
Thickness of valve head (margin)		
Intake	1.0 mm (0.039 in.)	0.7 mm (0.028 in.)
Exhaust	1.5 mm (0.059 in.)	1.0 mm (0.039 in.)
Valve stem to valve guide clearance		
Intake	0.020 ~ 0.047 mm (0.0008 ~ 0.0019 in.)	0.1 mm (0.0039 in.)
Exhaust	0.050 ~ 0.085 mm (0.0020 ~ 0.0033 in.)	0.15 mm (0.0059 in.)
Vavle guide		
Length		
Intake	45.5 mm (1.791 in.)	
Exhust	50.5 mm (1.988 in.)	
Service over size	0.05, 0.25, 0.50 mm (0.002, 0.010, 0.020 in.)	
Valve seat		
Width of seat contact	0.9 ~ 1.3 mm (0.035 ~ 0.051 in.)	
Seat angle	44° ~ 44.5°	
Service size	0.3 mm (0.012 in.) 0.6 mm (0.024 in.) oversize	
Vavle sprin		
Free length	45.82 mm (1.8039 in.)	
Load	25.3kg / 40 mm (55.78 lb / 1.57	

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Out-of-square	in.) at installed height Less than 1.5°	
Cylinder block		
Cylinder bore	86.5+0.03 mm (3.406+0.0012 in.)	
Out-of-round and taper of cylinder bore	Less than 0.01 mm (0.0004 in.)	
Flatness of gasket surface	Less than 0.05 mm (0.0020 in.)	0.1 mm (0.0039 in.)
Piston		
O.D.	86.47 ~ 86.5 mm (3.404 ~ 3.406 in.)	
Piston - to - cylinder clearance	0.02 ~ 0.04 mm (0.0008 ~ 0.0016 in.)	
Ring groove width		
No. 1	1.22 ~ 1.24 mm (0.048 ~ 0.049 in.)	
No. 2	1.51 ~ 1.53 mm (0.059 ~ 0.060 in.)	
Oil	2.81 ~ 2.83 mm (0.111 ~ 0.1114 in.)	
Service size	0.25 mm (0.010 in.) oversize	
Piston ring		
Side clearnace		
No. 1	0.03 ~ 0.07 mm (0.0012 ~ 0.0028 in.)	
No. 2	0.02 ~ 0.06 mm (0.0008 ~ 0.0024 in.)	
Oil ring	0.06 ~ 0.15 mm (0.0024 ~ 0.0059 in.)	0.1 mm (0.0039 in.)
End gap No. 1	0.25 ~ 0.35 mm (0.0098 ~ 0.0138 in.)	0.8 mm (0.031 in.)
No. 2	0.40 ~ 0.55 mm (0.0157 ~ 0.0216 in.)	0.8 mm (0.031 in.)
Oil ring side rail	0.10 ~ 0.40 mm (0.0039 ~ 0.0157 in.)	1.0 mm (0.039 in.)
Connecting rod		
Bend	0.05 mm (0.0020 in.)	
Twist	0.1 mm (0.004 in.)	
Connecting rod big end to crankshaft	0.10 ~ 0.25 mm (0.0040 ~ 0.0098 in.)	0.4 mm (0.0157 in.)
Side clearance		
Piston pis installation force	1250 ± 500 kg (2756 ± 1100 lb.ft)	
Connecting rod pin O.D	48 ~ 48.015 mm (1.890 ~ 1.8903 in.)	
Connecting rod bearing oil clearance	0.015 ~ 0.048 mm (0.0006 ~ 0.0019 in.)	0.1 mm (0.0039 in.)

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Crankshaft main bearing oil clearance		
No. 1, 2, 4, 5 journal	0.018 ~ 0.036 mm (0.0007 ~ 0.0014 in.)	0.1 mm (0.0039 in.)
No. 3 journal	0.024 ~ 0.042 mm (0.0009 ~ 0.0017 in.)	
Crankshaft		
Journal O.D	56.982 ~ 57.000 mm (2.2434 ~ 2.2441 in.)	0.25 mm (0.0098 in.)
Out - of - round of journal and pin	Less than 0.015 mm (0.0006 in.)	
Taper of journal and pin	Less than 0.005 mm (0.0002 in.)	
End play	0.05 ~ 0.25 mm (0.0020 ~ 0.0098 in.)	
Flywheel		
Runout		0.13 mm (0.0051 in.)
Oil pressure at idle [Oil temperature is 75-90°C (167-194°F)]	80 kPa (11.6 psi)	
Oil pump		
Tip clearance		
Drive gear	0.16 ~ 0.21 mm (0.0063 ~ 0.0083 in.)	0.25 mm (0.0098 in.)
Driven gear	0.18 ~ 0.21 mm (0.0071 ~ 0.0083 in.)	0.25 mm (0.0098 in.)
Side clearance		
Drive gear	0.08 ~ 0.14 mm (0.0031 ~ 0.0055 in.)	0.25 mm (0.0098 in.)
Driven gear	0.06 ~ 0.12 mm (0.0024 - 0.0047 in.)	0.25 mm (0.0098 in.)
Relief spring		
Free length	46.6 mm (1.835 in.)	
Load [61 N (13.5 lb)]	40.1 mm (1.579 in.)	
Right silent shaft		
Front journal diameter	18.467 ~ 18.480 mm (0.7270 ~ 0.7276 in.)	
Rear journal diameter	40.951 ~ 40.967 mm (1.6516 - 1.6129 in.)	
Oil clearance		
Front	0.020 ~ 0.061 mm (0.0008 ~ 0.0024 in.)	
Rear	0.050 ~ 0.091 mm (0.0020 - 0.0036 in.)	
Left silent shaft		
Front journal diameter	18.467 ~ 18.480 mm (0.7270 ~ 0.7276 in.)	

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Rear journal diameter	40.951 ~ 40.967 mm (1.6122 ~ 1.6130 in.)	
Oil clearance		
Front	0.020 ~ 0.054 mm (0.0008 ~ 0.0021 in.)	
Rear	0.042 ~ 0.083 mm (0.0017 ~ 0.0033 in.)	
Cooling method	Forced circulation with electric fan	
Cooling system quantity	7.0 lit (7.4 U.S.qts., 6.1 Imp.qts.) [For DOHC]	
Thermostat		
Type	Wax pellet type with jiggle valve	
Normal opening temperature	82 °C (180°F)	
Opening temperature range	80.5 ~ 83.5°C (176 ~ 183°F)	
Wide open temperature	95 °C (203°F)	
Radiator cap		
Main valve opening pressure	107.9 ± 14.7 kPa 1.1 ± 0.15 kg/cm ² 15.64 ± 2.13 psi)	
Main valve closing pressure	83.4 kPa (0.85 kg/cm ² , 12.1 psi)	
Vacuum valve opening pressure	-6.86 kPa (-0.07 kg/cm ² , -1.00 psi)	
Air cleaner		
Type	Dry type	
Element	Unwoven cloth type	
Exhaust pipe		
Muffler	Expansion resonance type	
Suspension system	Rubber hangers	
Coolant temperature sensor		
Type	Thermister type	
Resistance		
20°C (68°F)	2.37 ± 0.24 kohms	
80°C (176°F)	0.29 ± 0.032 kohms	

Service Standards

Standard value	
Coolant concentration	
Tropical area	40%
Other area	50%

G00789945

Fig. 1: Standard Value Table

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Courtesy of HYUNDAI MOTOR CO.

Lubricant

Engine coolant	Ethylene glycol base for aluminum radiator
----------------	--

G00789946

Fig. 2: Engine Coolant Specification
Courtesy of HYUNDAI MOTOR CO.

Sealant

Engine coolant temperature sensor	LOCTITE 262, three bond No. 1324 or equivalent
Oil pressure switch	3M ATD No. 8660 or Three bond No. 1141E

G00789947

Fig. 3: Sealant Specification Table
Courtesy of HYUNDAI MOTOR CO.

NOTE:

- O.D.= Outer Diameter**
- I.D.= Inner Diameter**
- O.S.= Oversize Diameter**
- U.S. = Undersize Diameter**

Torque Specifications

WARNING: For updated reuse guidelines and tightening procedures of cylinder head, connecting rod and main bearing bolts, refer to **TSB 02-20-002 CYLINDER HEAD/CONNECTING ROD/MAIN BEARING BOLT REUSE GUIDELINES & TORQUE SPECS** .

TORQUE SPECIFICATIONS

Application	Ft. Lbs. (N.m)
Alternator	
Support Bolt	15-18 (20-25)
Brace Bolts	
M8x90 mm	(1)
M8x40 mm	15-18 (20-25)
Auto Tensioner Bolts	15-20 (20-27)
A/C Compressor-To-Bracket Bolts	17-20 (23-27)
Balance Shaft Bolts	25-30 (34-40)
Block Plug Caps	15-20 (20-27)

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Camshaft Bearing Cap Bolts	14-15 (19-20)
Camshaft Sprocket Bolts	59-74 (80-100)
CMPS Cylinder Bolt	11-16 (11-22)
Coolant Pump Bolts	15-20 (20-27)
Coolant Temperature Sensor	15-30 (20-40)
Connecting Rod Cap Bolts	
Step 1	15 (20)
Step 2	Tighten An Additional 90 Degrees
Crankshaft Pulley Bolt	118-125 (160-170)
Cylinder Head Bolts ⁽²⁾	
Using New Bolts ⁽²⁾	
Step 1	47 (64)
Step 2	⁽³⁾ Fully Loosen Bolts
Step 3	15 (20)
Step 4	Tighten An Additional 90 Degrees
Step 5	Tighten An Additional 90 Degrees
Using Original Bolts ⁽²⁾	
Step 1	15 (20)
Step 2	Tighten An Additional 90 Degrees
Step 3	Tighten An Additional 90 Degrees
Damper Pulley-To-Crankshaft Sprocket	15-22 (20-30)
Driven Gear Bolts	25-30 (34-40)
Drive Plate Bolts	96-103 (130-140)
Engine Mounting Components	
Engine Hanger Bolts	
M8	18-22 (25-30)
M10	25-41 (35-55)
Engine Mounting Bracket Bolts & Nuts	44-59 (60-80)
Engine Mount Insulator Bolts	66-81 (90-110)
Engine Support Bracket Fasteners	41-48 (55-65)
Front Roll Stopper Bracket-To-Crossmember Bolts	30-41 (40-55)
Front Roll Stopper Insulator Fasteners	36-48 (50-65)
Rear Roll Stopper Bracket-To-Crossmember Bolts	36-48 (50-65)
Rear Roll Stopper Insulator Fasteners	36-48 (50-65)
Exhaust Components	
Center Exhaust Pipe-To-Catalytic Converter Bolts	22-30 (30-40)
Center Exhaust Pipe-To-Main Muffler	22-30 (30-40)
Exhaust Manifold Cover Bolts	9-11 (12-15)

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Exhaust Manifold	
M8 Nuts	18-22 (25-30)
M10 Nuts	25-40 (34-54)
Front Exhaust Pipe Clamp Bolt	15-22 (20-30)
Front Exhaust Pipe-To-Exhaust Manifold Bolts	30-37 (40-50)
Front Exhaust Pipe Bracket Bolts	15-22 (20-30)
Front Exhaust Manifold Bolt-To-Cylinder Head	15-22 (20-30)
Main Muffler Hanger Support Bracket Bolt	7-14 (10-20)
Flywheel-To-Crankshaft Bolts	96-103 (130-140)
Front Case Bolts	15-20 (19-27)
Idler Pulley Bolts	22-31 (30-42)
Intake Manifold	
Bracket Bolts (Stay)	13-18 (18-25)
Mounting Bolts/Nuts	
Bolts	11-15 (15-20)
Nuts	22-31 (30-42)
Main Bearing Cap Bolts	
Step 1	18 (25)
Step 2	Tighten An Additional 90 Degrees
Oil Drain Plug	25-33 (34-45)
Oil Filter Bracket Bolts	15-20 (20-27)
Oil Pump	
Cover Bolts	11-13 (15-18)
Sprocket Nuts	37-44 (50-60)
Oil Screen Bolts	11-16 (15-22)
Oxygen Sensor	29-37 (40-50)
Power Steering Pump Bracket Bolts	25-33 (35-45)
Relief Plug	29-37 (40-50)
Starter Bolts	20-25 (27-34)
Stud Bolts	22-30 (30-40)
Tension Rod Bracket Bolt-To-Tension Rod	25-40 (35-55)
Tensioner Arm Assembly Bolts	12-19 (17-26)
Tensioner Pulley Bolts	31-41 (42-54)
Tensioner Pulley Bracket Bolts	17-20 (23-27)
Throttle Body Stay Bolts	11-16 (15-22)
Throttle Body-To-Intake Manifold Bolts	11-16 (15-22)
Timing Belt Idler Bolts	22-30 (30-40)
Timing Belt Tensioner Bolts	31-40 (42-54)
Torque Converter-To-Drive Plate Bolts	33-39 (45-53)

2003 Hyundai Santa Fe


2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Transaxle Mount

Bracket Bolts	44-59 (60-80)
Insulator Bolts	66-81 (90-110)
INCH Lbs. (N.m)	
Air Cleaner Body Bolts	71-89 (8-10)
Air Cleaner Bracket Bolts	88-115 (10-13)
Center Cover Bolts	35-44 (4-5)
Coolant Inlet Fitting	89-133 (10-15)
Coolant Pump Pulley Bolts	71-89 (8-10)
Delivery Pipe-To-Cylinder Block Bolts	89-115 (10-13)
Exhaust Hanger Bolts	
Hanger Bolt-To-Body	88-133 (10-15)
Hanger Bolt-To-Main Muffler	88-133 (10-15)
Heat Protector-To-Exhaust Manifold Bolts	106-133 (12-15)
Ignition Coil Bolts	71-106 (8-12)
Oil Level Gauge	106-133 (12-15)
Oil Pan Bolts	89-106 (10-12)
Oil Pressure Switch	71-106 (8-12)
Oil Seal Case Bolts	89-106 (10-12)
Power Transistor Bolts	89-106 (10-12)
Radiator Fan Motor Bolts	71-89 (8-10)
Rear Oil Seal Case Bolts	89-106 (10-12)
Resonator Mounting Bolts	71-89 (8-10)
Rocker Cover Bolts	71-89 (8-10)
Timing Belt Cover	
Lower & Upper Cover Bolts	71-88 (8-10)
Rear Cover Bolts	
Upper	88-106 (10-12)
Right	88-106 (10-12)
Valve Cover Bolts	71-89 (8-10)

- (1) Tighten to 71-106 INCH lbs. (8-12 N.m).
- (2) Tighten in sequence with engine cold. See **Fig. 4**.
- (3) Fully loosen bolts in correct order. See **Fig. 5**.
- (4) Tighten to 71-89 INCH lbs. (8-10 N.m).
- (5) Tighten to 89-106 INCH lbs. (10-12 N.m)


← CAMSHAFT SPROCKET SIDE

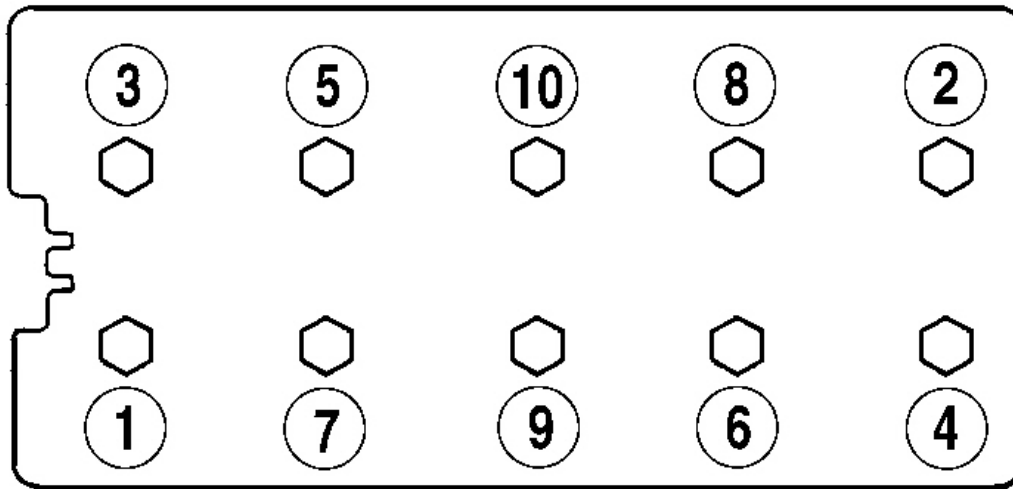

G00010614

Fig. 4: Cylinder Head Bolt Removal Sequence
 Courtesy of NISSAN MOTOR CO., U.S.A.

← CAMSHAFT SPROCKET SIDE

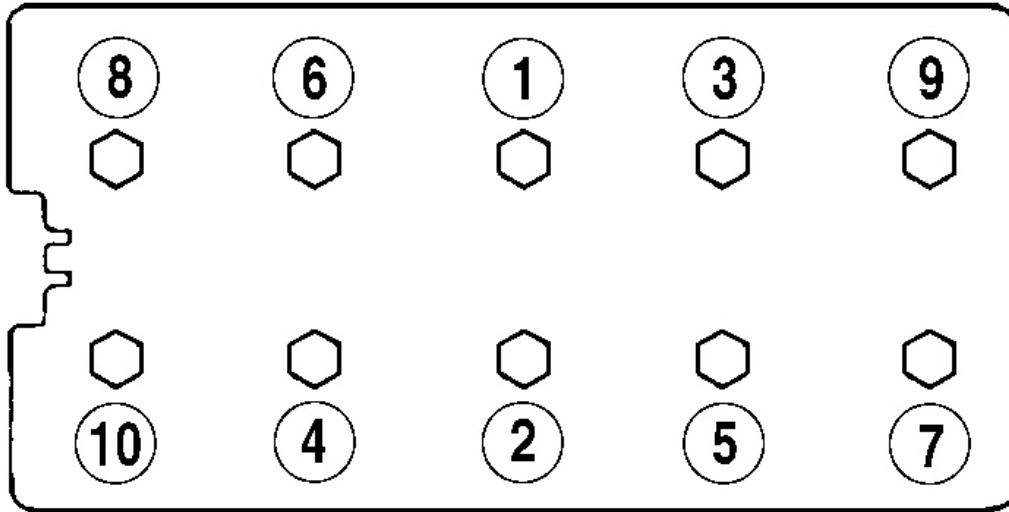

G00010615

Fig. 5: Cylinder Head Bolt Tightening Sequence
Courtesy of HYUNDAI MOTOR CO.

Checking Engine Oil

1. Position a vehicle on a level surface.
2. Turn off the engine.

NOTE: If a vehicle that has not been used for a prolonged period, run the engine for several minutes.
Turn off the engine and wait for 5 minutes at least, and then check the oil level.

3. Check that the engine oil level is within the level range indicated on the oil dipstick. If the oil level is found to have fallen to the lower limit (the "L" mark), refill to the "F" mark.

NOTE: When refilling, use the proper grade of engine oil.

4. Check that the oil is not dirty or mixed with coolant or gasoline and it has the proper viscosity.

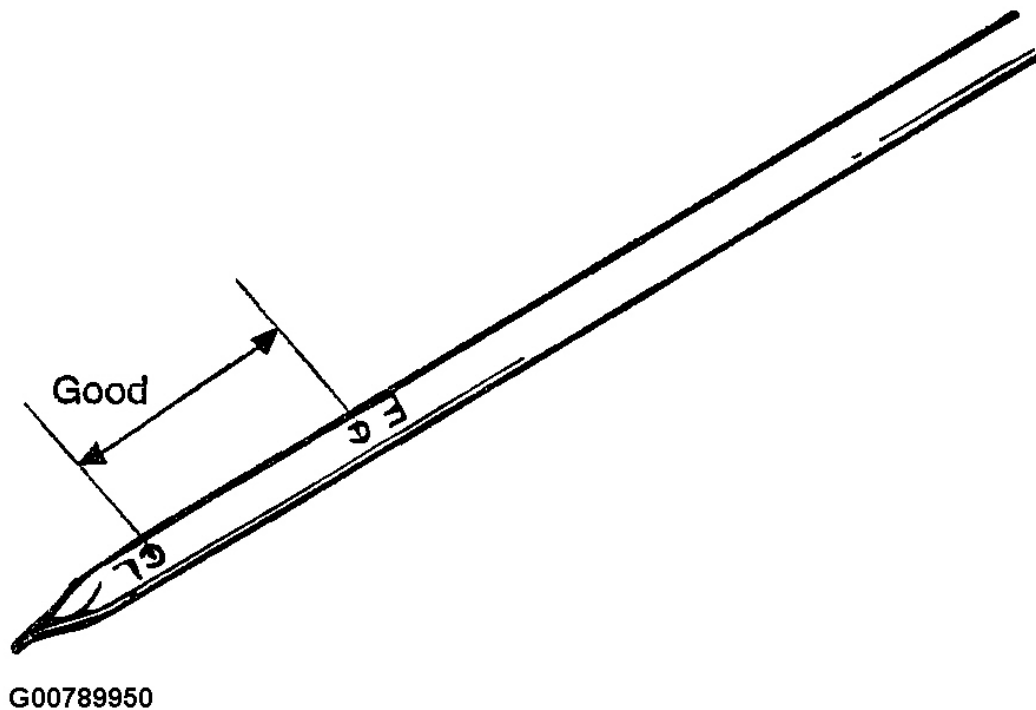


Fig. 6: Identifying Good Oil Level
Courtesy of HYUNDAI MOTOR CO.


Selection Of Engine Oil

Recommended API classification: SH OR ABOVE

RECOMMENDED SAE VISCOSITY GRADES :

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

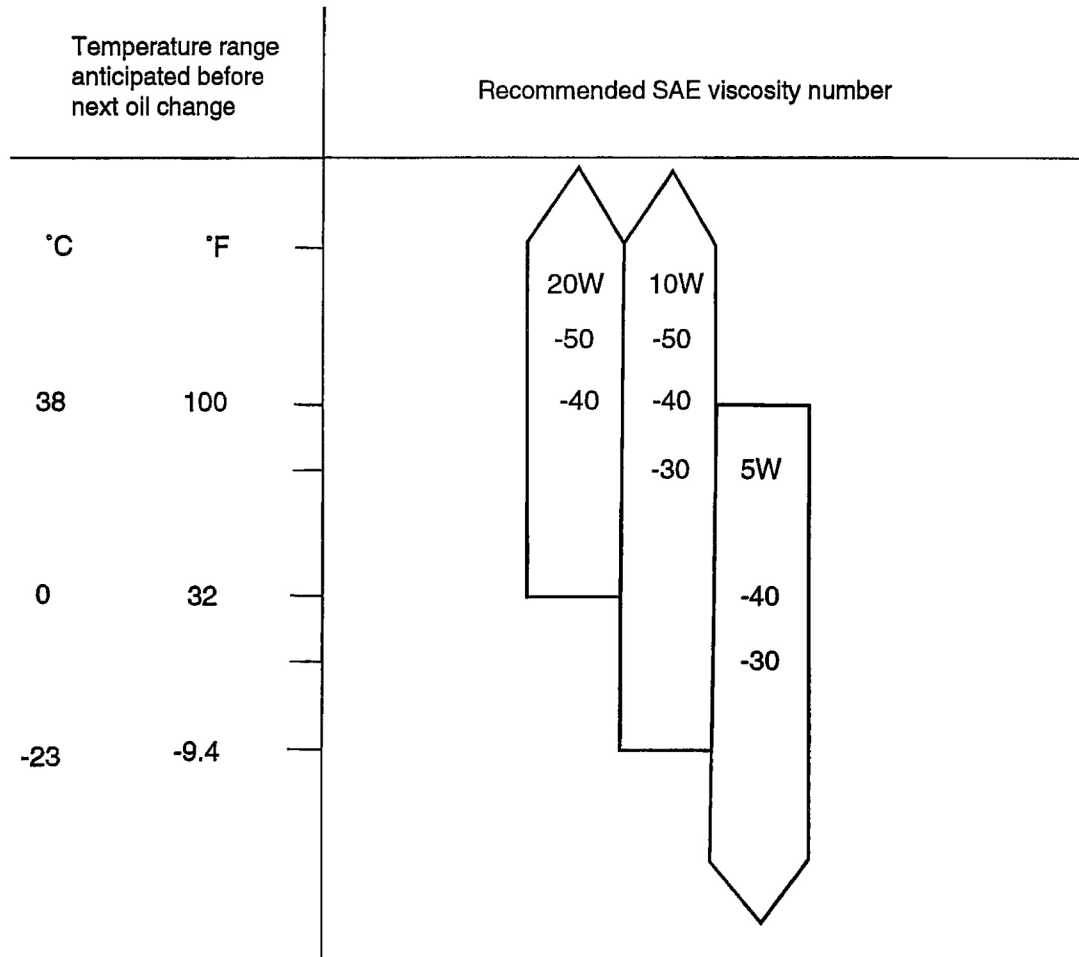

G00789951

Fig. 7: Recommended SAE Viscosity Grades
Courtesy of HYUNDAI MOTOR CO.

NOTE: For best performance and maximum protection of all types of operation, select only those lubricants which:

1. Satisfy the requirements of the API classification.
2. Have the proper SAE grade number for expected ambient temperature range.

Lubricants which do not have both SAE grade number and an API service classification on the container should not be used.

Changing Engine Oil

1. Run the engine until it reaches normal operating temperature.

2. Turn off the engine.
3. Remove the oil filler cap and the drain plug. Drain the engine oil.
4. Tighten the drain plug to the specified torque.

Tightening torque

Oil pan drain plug : 35 ~ 45 Nm (350 ~ 450 kg.cm, 25 ~ 33 lb.ft)

NOTE: **Whenever tightening the oil drain plug, use a new drain plug gasket.**

5. Fill new engine oil through the oil filler cap opening.

Capacity

Drain and refill : 4.3 lit (4.53 U.S.qts., 3.78 Imp.qts.)


NOTE: **Do not overfill. This will cause oil aeration and loss of oil pressure.**

6. Install the oil filler cap.
7. Start and run the engine.
8. Turn off the engine and then check the oil level. Add oil if necessary.

Replacing The Oil Filter

All Hyundai Motor Company engines are equipped with a high quality, disposable oil filter. This filter is recommended as a replacement filter for all vehicles. The quality of after market replacement filters vary considerably.

High quality replacement filters should be used to assure the most efficient service. Make sure that the rubber gasket from the old oil filter is completely removed from the contact surface on the engine block before installing a new filter.

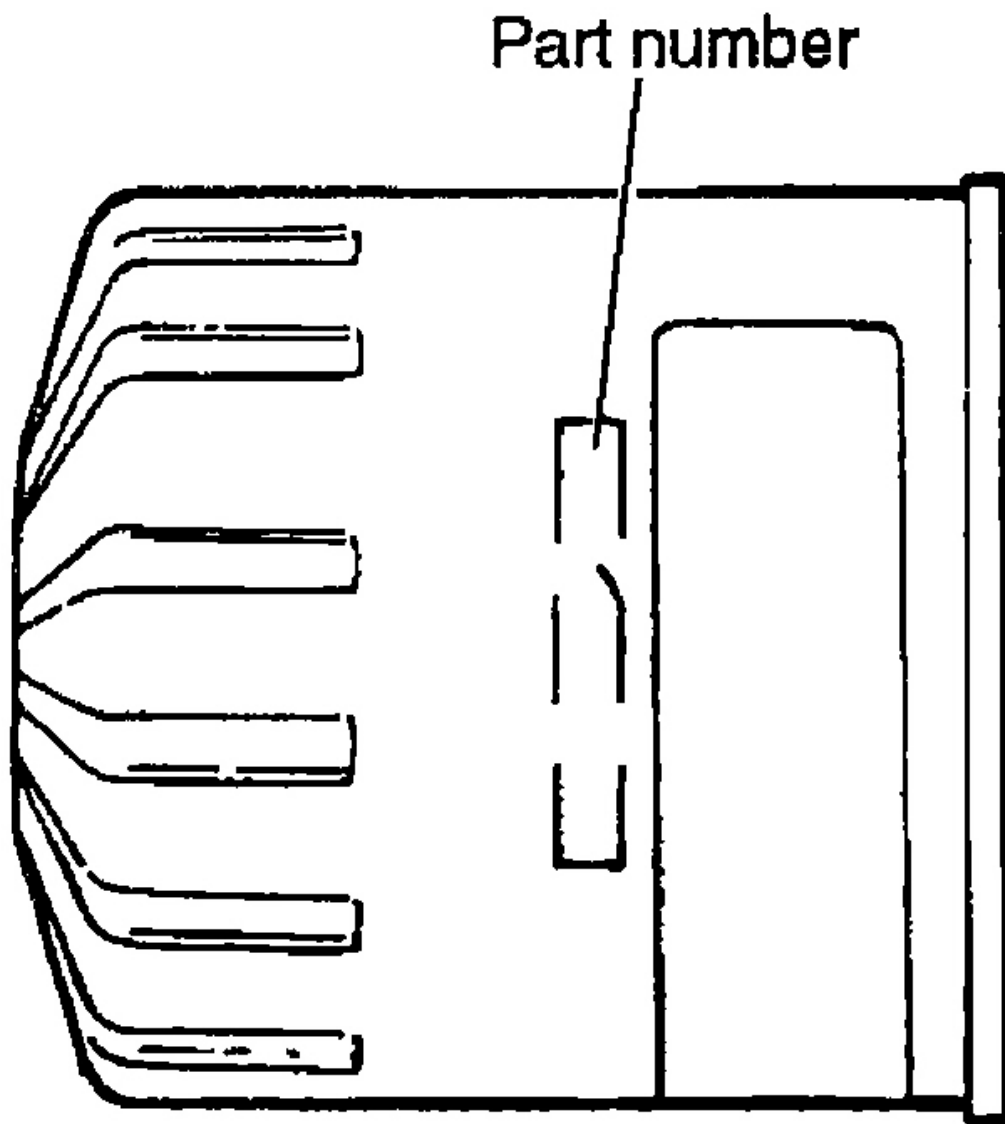


G00789952

Fig. 8: Identifying Oil Filter Part Number
Courtesy of HYUNDAI MOTOR CO.

Procedure For Replacing The Oil Filter

1. Use a filter wrench to remove the oil filter.
2. Before installing a new oil filter on the engine, apply clean engine oil to the surface of the rubber gasket.

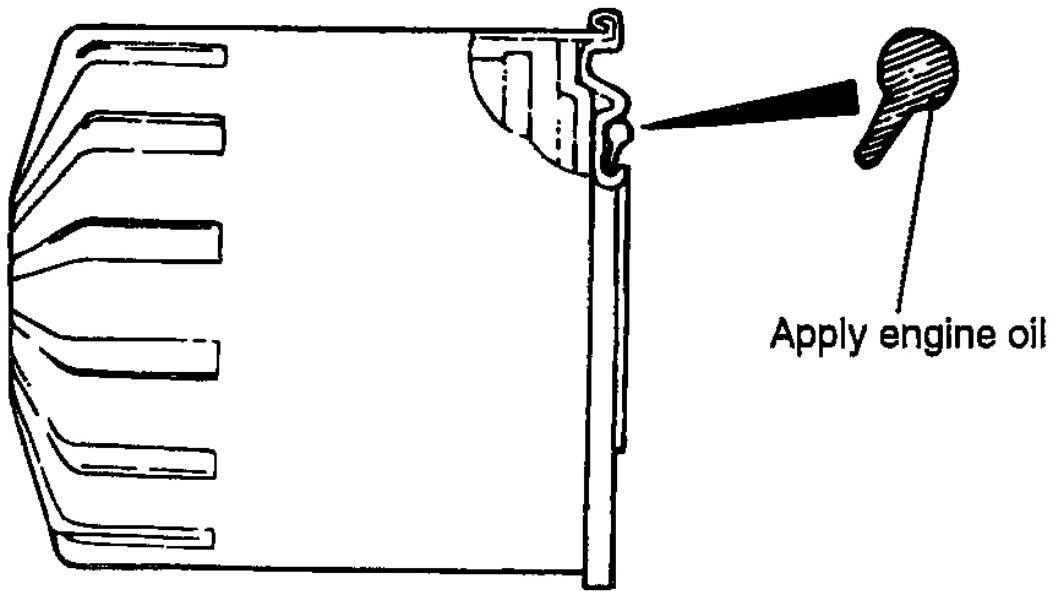

G00789953

Fig. 9: Applying Engine Oil To Oil Filter Rubber Gasket
Courtesy of HYUNDAI MOTOR CO.

3. Tighten the oil filter to the specified torque.

Oil filter : 12 ~ 16 Nm (120 ~ 160 kg.cm, 9 ~ 12 lb.ft)

4. Start and run the engine and check for engine oil leak.
5. After turning off the engine, check the oil level and add oil as necessary.


Checking Coolant Leak

1. Loosen the radiator cap.
2. Confirm that the coolant level is up to the filler neck.
3. Install a radiator cap tester to the radiator filler neck and apply 150 kpa (21 psi, 1.53 kg/cm²) pressure. Hold it for two minutes in that condition while checking for leakage from the radiator, hoses or connections.

NOTE:

1. Radiator coolant may be extremely hot. Do not open the system because hot, or scalding water could gush out causing personal injury. Allow the vehicle to cool before servicing this system.
2. When the tester is removed, be careful not to spill any coolant from it.

3. Be sure to clean away completely any from the area.
 4. Be careful when installing and removing the tester and when testing, not to deform the filler neck of the radiator.
4. If there is leakage, repair or replace with the appropriate part.

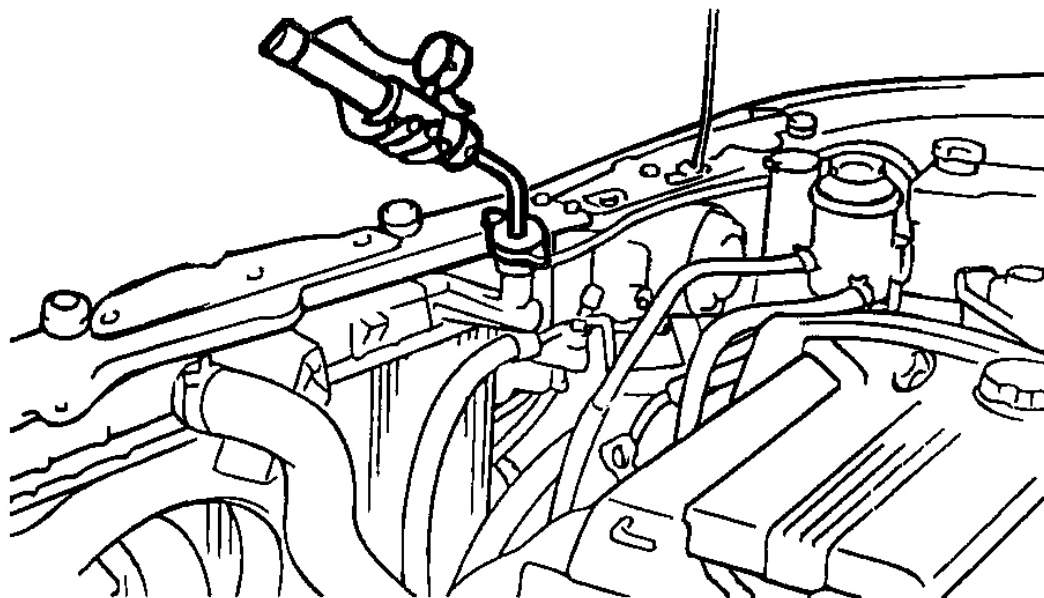

G00789954

Fig. 10: Pressure Testing Cooling System
Courtesy of HYUNDAI MOTOR CO.

Radiator Cap Pressure Test

1. Use an adapter to attach the cap to the tester.
2. Increase the pressure until the gauge stops moving.


Main valve opening pressure : 107.9kPa $\pm$ 14.7kPa (1.1 $\pm$ 0.15 kg/cm² , 15.64 $\pm$ 2.13)

Main valve closing pressure : 83.4 kPa (0.85 kg/cm² , 12.1 psi)

3. Check that the pressure level is maintained at or above the limit.
4. Replace the radiator cap if the reading does not remain at or above the limit.

NOTE: Be sure that the cap is clean before testing, since rust or other foreign

material on the cap seal will cause an incorrect reading.

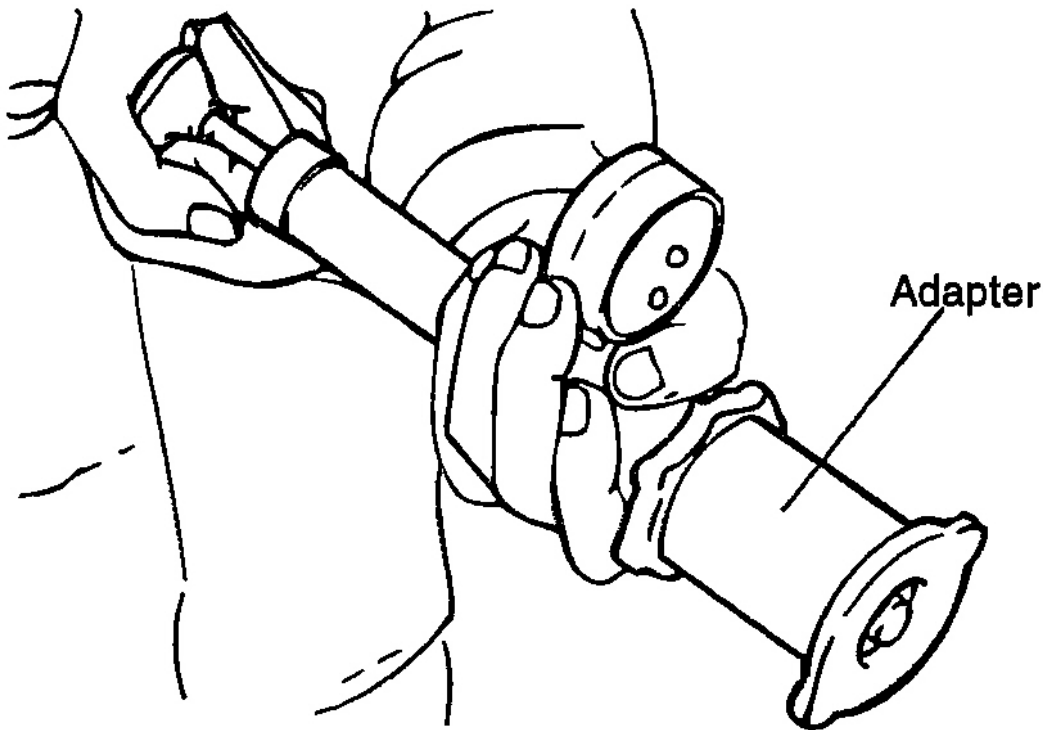


G00789955

Fig. 11: Pressure Testing Radiator Cap
Courtesy of HYUNDAI MOTOR CO.

Specific Gravity Test

1. Measure the specific gravity of the coolant with a hydrometer.
2. Measure the coolant temperature and calculate the concentration from the relation between the specific gravity and temperature, using the following table for reference.

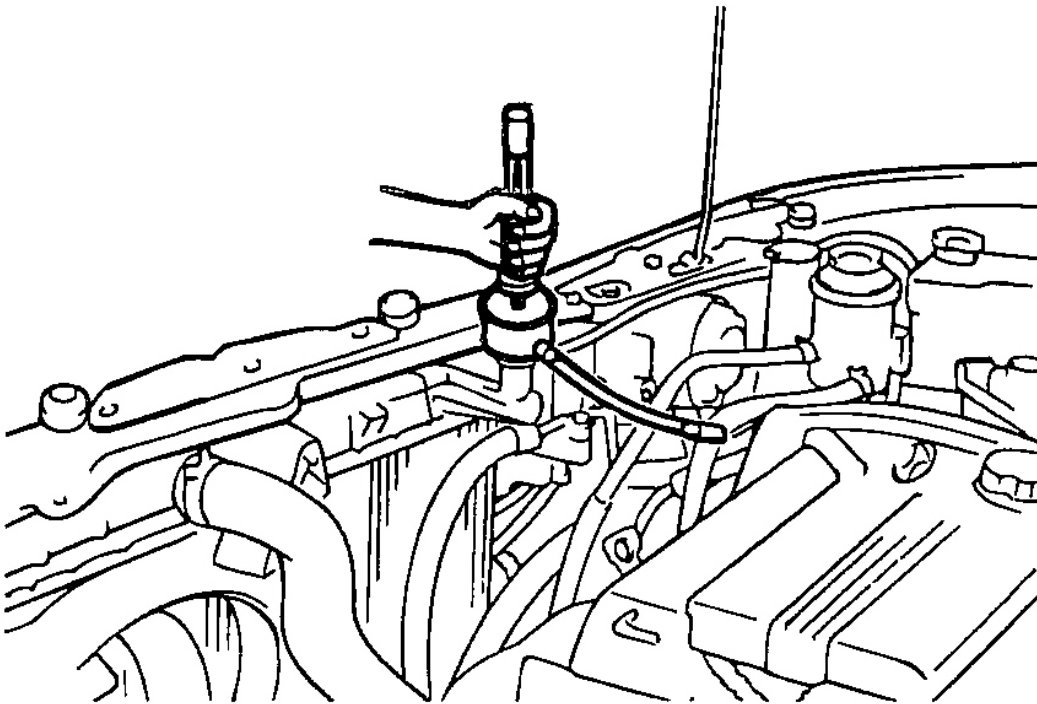

G00789956

Fig. 12: Checking Coolant With Hydrometer
Courtesy of HYUNDAI MOTOR CO.

Coolant temperature °C (°F) and specific gravity					Freezing temperature °C (°F)	Safe operating temperature °C (°F)	Coolant concentration (Specific volume)
10 (50)	20 (68)	30 (86)	40 (104)	50 (122)			
1.054	1.050	1.046	1.042	1.036	-16 (3.2)	-11 (12.2)	30%
1.063	1.058	1.054	1.049	1.044	-20 (-4)	-15 (5)	35%
1.071	1.067	1.062	1.057	1.052	-25 (-13)	-20 (-4)	40%
1.079	1.074	1.069	1.064	1.058	-30 (-22)	-25 (-13)	45%
1.087	1.082	1.076	1.070	1.064	-36 (-32.8)	-31 (-23.8)	50%
1.095	1.090	1.084	1.077	1.070	-42 (-44)	-37 (-35)	55%
1.103	1.098	1.092	1.084	1.076	-50 (-58)	-45 (-49)	60%

G00789957

Fig. 13: Coolant Concentration Table
Courtesy of HYUNDAI MOTOR CO.

Example

The safe operating temperature is -15°C (5°F) when the measured specific gravity is 1.058 at coolant temperature of 20°C (68°F)

CAUTION:

- If the concentration of the coolant is below 30%, its anti-corrosion properties will be adversely affected.
- If the concentration is above 60%, both the anti-freeze and engine cooling property will decrease, affecting the engine adversely. For these reasons, be sure to maintain the concentration level within the specified range.
- Do not mix types of anti-freeze.

Antifreeze	Mixture ratio of anti freeze in coolant
ETHYLENE GLYCOL BASE FOR ALUMINUM	50% [Except tropical areas] 40% [Tropical areas]


G00789958

Fig. 14: Recommended Coolant
Courtesy of HYUNDAI MOTOR CO.

Checking Compression Pressure

1. Before checking engine compression, check the engine oil level. Also check that the starter motor and battery are all in normal operating condition.
2. Start the engine and wait until the engine coolant temperature reaches 80 ~ 95°C (176 ~ 205°F).
3. Turn off the engine and disconnect the spark plug cables.
4. Remove the spark plugs.
5. Crank the engine to remove any foreign material in the cylinders.
6. Insert the compression gauge into the spark plug hole.
7. Depress the accelerator pedal to open the throttle fully.
8. Crank the engine and read the gauge.

Standard value : 1200 kpa (12.2 kg / cm² , 170 psi)

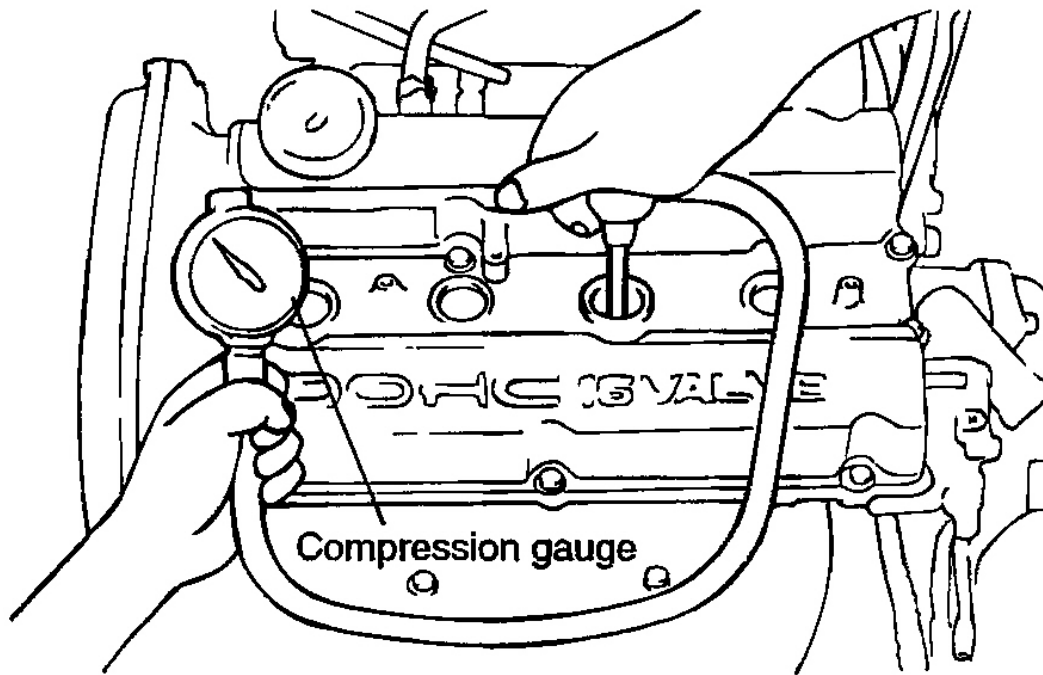

G00789959

Fig. 15: Reading Compression Gauge
Courtesy of HYUNDAI MOTOR CO.

9. Repeat steps 6 to 8 for all cylinders, ensuring that the pressure difference for each of the cylinders is within the specified limit.

Limit

Max. 100 kpa (1.0 kg / cm² , 14 psi) between cylinder


10. If a cylinder's compression or pressure differential is outside the specification, add a small amount of oil through the spark plug hole, and repeat steps 6 to 9.
 1. If the addition of oil causes the compression to rise, it is likely that there may be wear between the piston ring and cylinder wall.
 2. If compression remains the same, valve seizure, poor valve seating or a compression leak from the cylinder head gasket are all possible causes.

Tightening torque

Spark plug : 20 ~ 30 Nm (200 ~ 300 kg.cm, 14 ~ 22 lb.ft)

Adjusting Drive Belt Tension

1. Check that the belts are not damaged and are properly placed for the pulley grooves.
2. Apply 100 N (22 lbs.) force to the back and midway portion of the belt between the pulleys as shown in the illustration and measure the amount of deflection with a tension gauge.

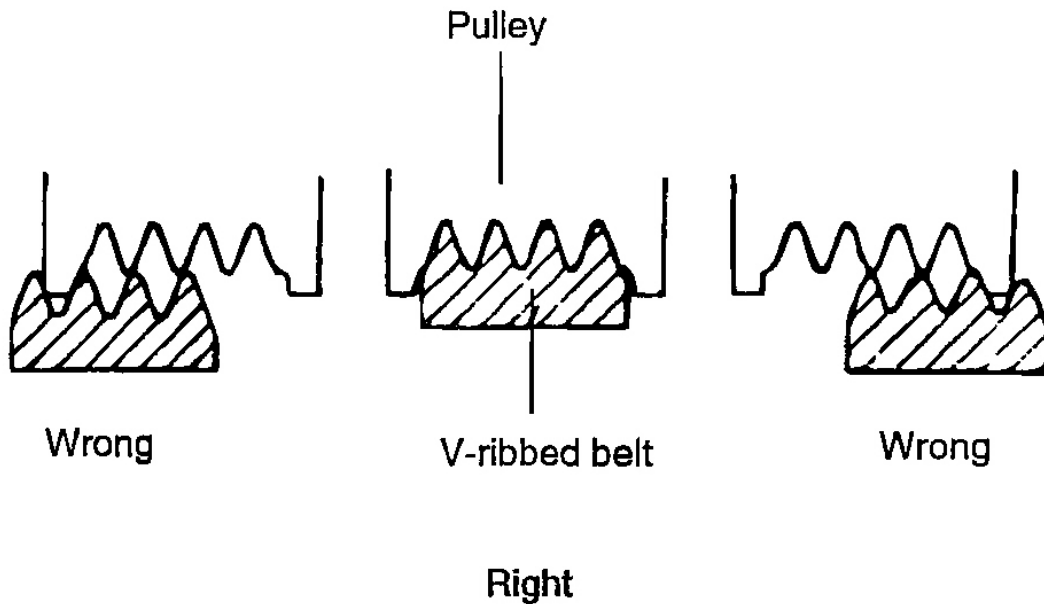

G00789960

Fig. 16: Locating Belt On Pulley
Courtesy of HYUNDAI MOTOR CO.

- CAUTION:**
1. When installing the V-ribbed belt, check that the V-ribs are properly aligned.
 2. If noise or slippage is detected, check the belt for wear, damage, or breakage on the pulley contact surface, and check the pulley for scoring. Also check the amount that the belt is deflected.

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe


Items		Inspection	Adjustment	
			New	Use
For alternator	Deflection mm (in.)	7.7 ~ 12.3 (0.303 ~ 0.484)	6.3 ~ 7.3 (0.248 ~ 0.287)	8.4 ~ 10.6 (0.330 ~ 0.417)
	Tension N (lb)	300 ~ 500 (67 ~ 112)	550 ~ 650 (124 ~ 146)	350 ~ 450 (79 ~ 101)
For air conditioner	Deflection mm (in.)	8 (0.31)	5.0 ~ 5.5 (0.20 ~ 0.22)	6.0 ~ 7.0 (0.24 ~ 0.28)
	Tension N (lb)	250 ~ 500 (56 ~ 112)	470 ~ 570 (106 ~ 128)	320 ~ 400 (72 ~ 90)
For power steering	Deflection mm (in.)	6.0 ~ 9.0 (0.24 ~ 0.35)	-	-

G00789961

Fig. 17: Standard Value Table
Courtesy of HYUNDAI MOTOR CO.

NOTE:

1. The belt tension must be measured half-way between the specified pulleys.
2. When a new belt is installed, adjust the tension to the central value of the standard range indicated under "New" in the above table. Let the engine idle for 5 minutes or more, and check the standard value indicated under "inspection".
3. When adjusting a belt which has been used, or a belt installed newly after 5 minutes or more of operation, refer to the standard value indicated under "Used" in Fig. 17.
4. Refer to the standard value indicated under "Inspection" for periodic inspections.

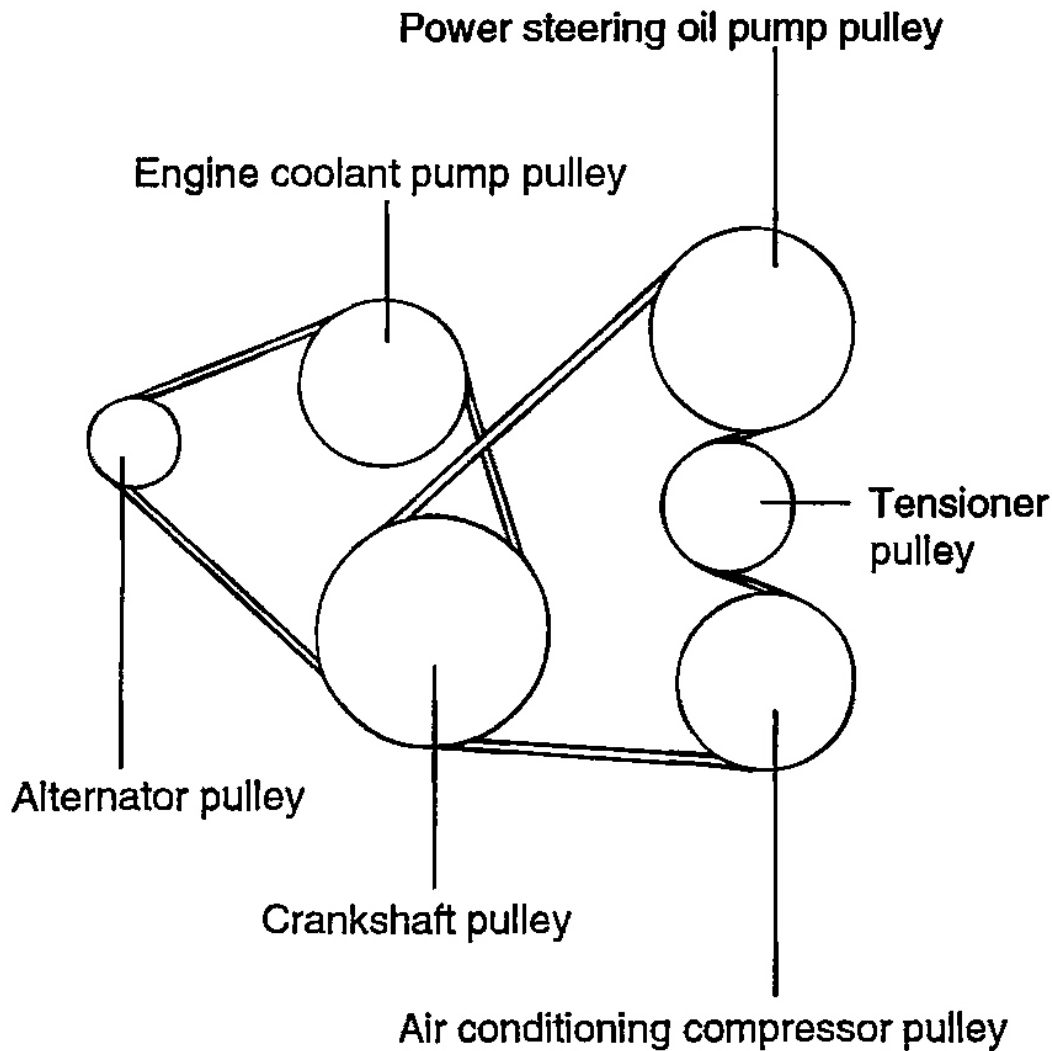


G00789962

Fig. 18: Identifying Belts & Pulleys
Courtesy of HYUNDAI MOTOR CO.

Type A Tension Gauge

Do not let the dial section of the tension gauge contact other objects during measurement.

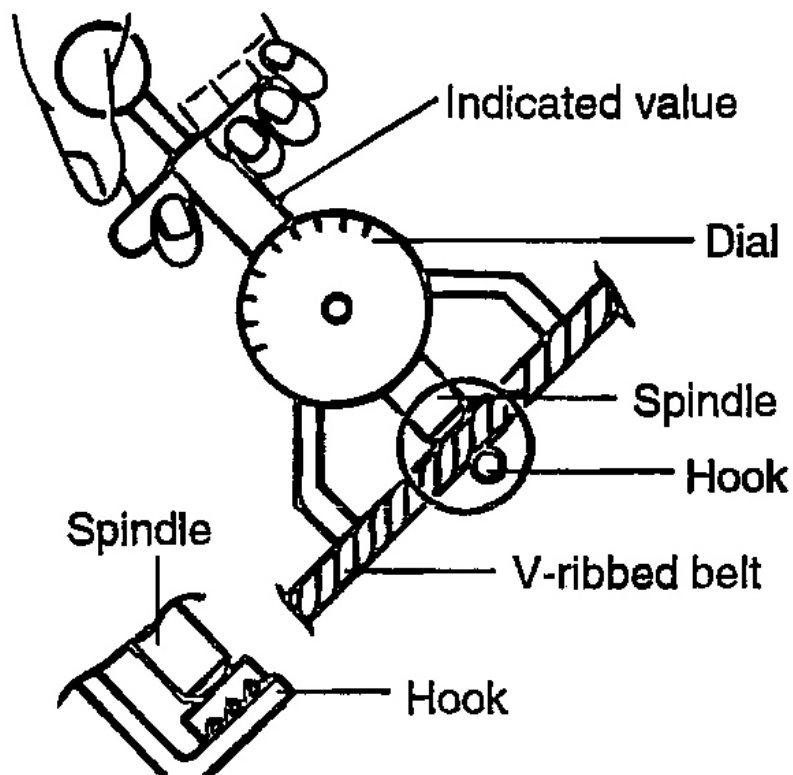
Type A

G00789963

Fig. 19: Identifying Type A Tension Gauge
Courtesy of HYUNDAI MOTOR CO.

Type B Tension Gauge

1. When measuring, turn the reset button in the direction of the arrow and set the gauge needle to the RESET position.
2. If the tension gauge is removed from the belt, the needle will still indicate the tension. Read the tension value after removing the gauge.

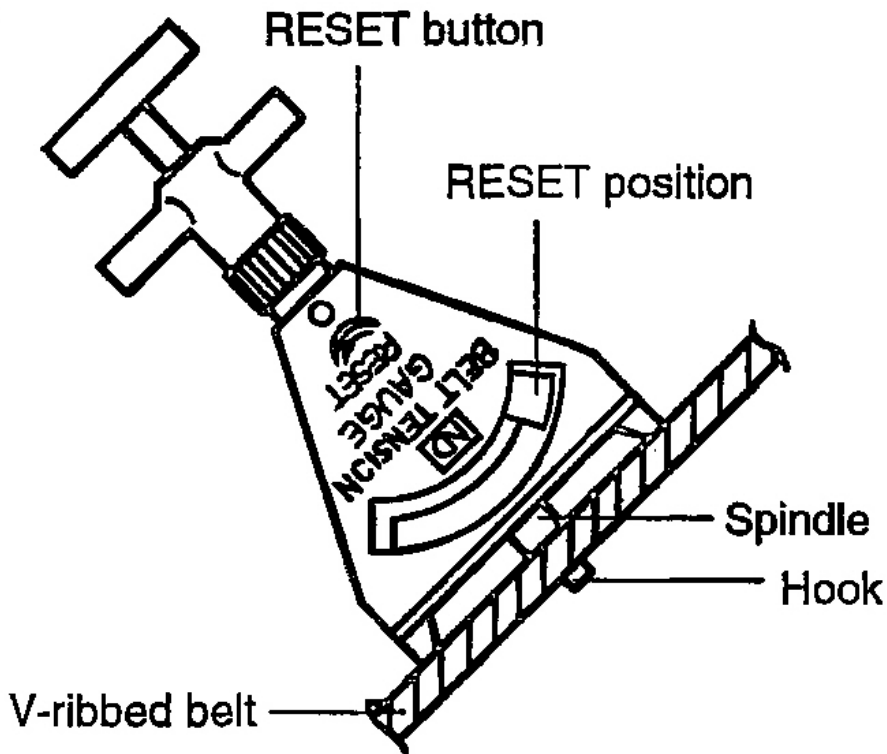Type B

G00789964

Fig. 20: Identifying Type B Tension Gauge
Courtesy of HYUNDAI MOTOR CO.

ADJUSTING THE ALTERNATOR BELT

CAUTION: If the belt is too loose, it will cause noise or sudden wear.
If the belt is too tight, the engine coolant pump bearing or the alternator can be damaged.

1. Loosen the alternator nut "A" and the tension adjuster lock bolt "B".
2. Using the tension adjuster bolt, adjust the belt tension to the specification.
3. Tighten the adjuster lock bolt "B".
4. Tighten the alternator nut "A".
5. Check the tension or the deflection of belt, and read just if necessary.


Tightening torque

Alternator nut A :

35 ~ 55 Nm (350 ~ 550 kg.cm, 25 ~ 40 lb.ft)

Adjuster lock bolt B :

20 ~ 25 Nm (200 ~ 250 kg.cm, 14 ~ 18 lb.ft)

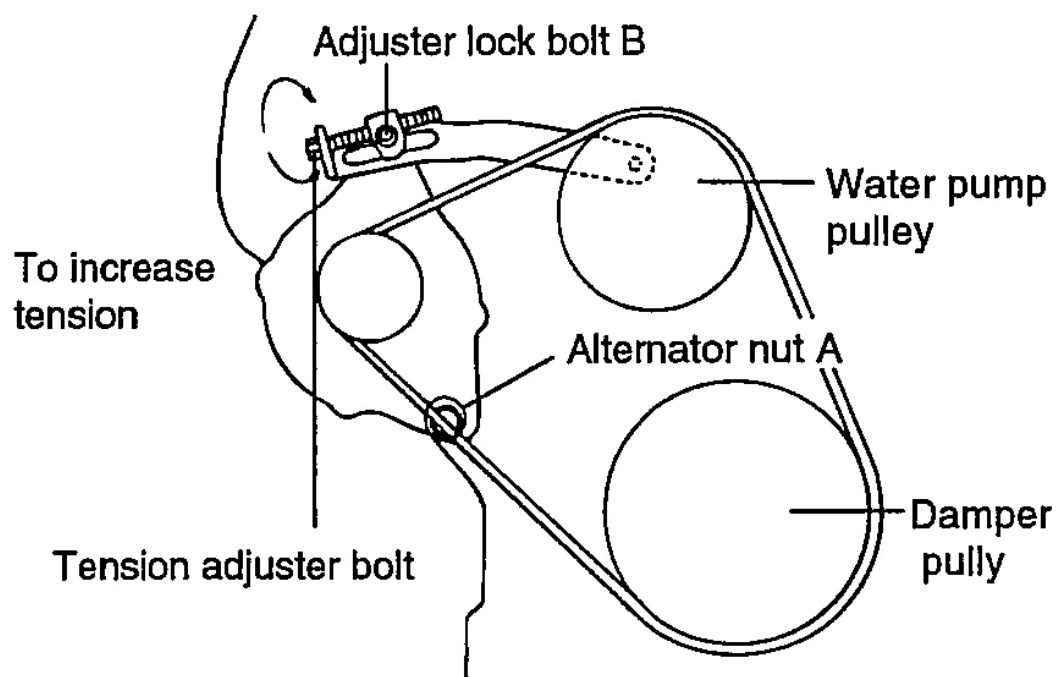


G00789965

Fig. 21: Identifying Alternator Belt Tensioner Bolt
Courtesy of HYUNDAI MOTOR CO.

Adjusting Power Steering & Air Conditioner Belts

1. Loosen the tension pulley adjustment bolt A.
2. Adjust the belt deflection with adjustment bolt B.
3. Tighten bolt A.
4. Recheck the belt deflection and readjust, if necessary.

NOTE: Before rechecking, crank the engine one more revolution.

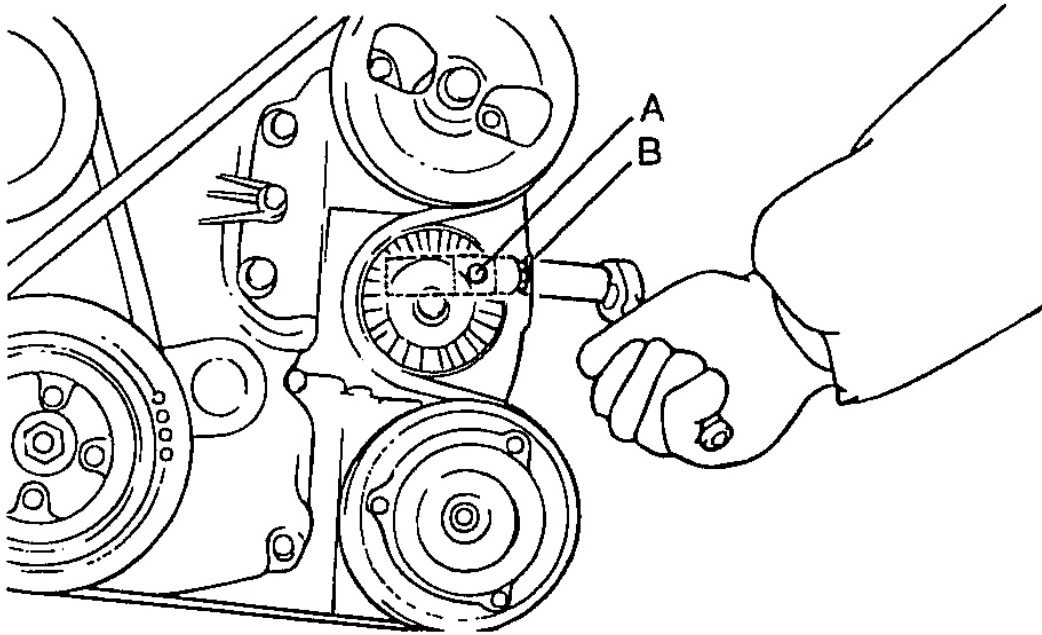







G00789966

Fig. 22: Identifying Power Steering & Air Conditioner Belt Tensioner
Courtesy of HYUNDAI MOTOR CO.

SPECIAL TOOLS

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe





Tool (Number and name)	Illustration	Use
Counter balance shaft bearing puller (09212-32000)		Removal of counter balance shaft front bearing
Counter balance shaft bearing puller (09212-32100)		Removal of counter balance shaft rear bearing (use with 09212-32300)
Counter balance shaft bearing installer (09212-32200)		Installation of counter balance shaft front and rear bearing (use with 09212-32300)
Guide plate (09212-32300)		Removal and installation of counter balance shaft rear bearing (use with 09212-32100, 09212-32200)
Plug cap wrench (09213-33000)		Removal and installation of front case cap plug
Crankshaft front oil seal installer (09214-32000)		Installation of the crankshaft front oil seal (use with 09214-32100)

G00789967

Fig. 23: Identifying Special Tools (1 Of 3)
 Courtesy of HYUNDAI MOTOR CO.

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe


Tool (Number and name)	Illustration	Use
Crankshaft front oil seal guide (09214-32100)		Installation of the crankshaft front oil seal (use with 09214-32000)
Camshaft oil seal installer (09221-21000)		Installation of the camshaft oil seal (use with 09221-21100)
Camshaft oil seal guide (09221-21100)		Used as a guide when pressing in the camshaft oil seal (use with 09221-21000)
Valve guide installer (09221-3F000 A/B)		Removal and installation of valve guides
Valve spring compressor (09222-28000) Valve spring compressor holder (09222-28100)		Removal and installation of inlet and exhaust valves

G00789968

Fig. 24: Identifying Special Tools (2 Of 3)
Courtesy of HYUNDAI MOTOR CO.

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Tool (Number and name)	Illustration	Use
Valve stem oil seal install (09222-28200)		Installation of valve stem oil seals
Crankshaft rear oil seal installer (09231-21000)		1. Installation of the engine rear oil seal. 2. Installation of the crankshaft rear oil seal

G00789969

Fig. 25: Identifying Special Tools (3 Of 3)
Courtesy of HYUNDAI MOTOR CO.

TROUBLESHOOTING

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Symptom	Probable cause	Remedy
Low compression	Damaged cylinder head gasket Worn or damaged piston rings Worn piston or cylinder Worn or damaged valve seat	Replace gasket Replace rings Repair or replace piston and/or cylinder block Repair or replace valve and/or seat ring
Oil pressure drop	Low engine oil level Faulty oil pressure switch Clogged oil filter Worn oil pump gears or cover Thin or diluted engine oil Oil relief valve stuck (open) Excessive bearing clearance	Check engine oil level Replace Replace Replace Change and find out cause Repair Replace
High oil pressure	Oil relief valve stuck (closed)	Repair
Excessive engine vibration	Loose engine roll stopper (front, rear) Loose transaxle mount bracket Loose engine mount bracket Loose center member Broken transaxle mount insulator Broken engine mount insulator Broken engine roll stopper insulator	Re-tighten Re-tighten Re-tighten Re-tighten Replace Replace Replace
Noisy valves	Thin or diluted engine oil (low oil pressure) Worn or damaged valve stem or valve guide	Change Replace
Connecting rod and/main bearing noise	Insufficient oil supply Thin or diluted engine oil Excessive bearing clearance	Check engine oil level Change and find out cause Replace
Timing belt noise	Incorrect belt tension (Auto tensioner, timing belt)	Adjust belt tension
Low coolant level	Leakage of coolant Damaged radiator core joint Corrod or cracked hoses (radiator hose, heater hose, etc.)	Replace Replace
	Faulty radiator cap valve or setting of spring Faulty thermostat Faulty engine coolant pump	Replace Replace Replace
Clogged radiator	Foreign material in coolant	Replace
Abnormally high coolant temperature	Faulty thermostat Faulty radiator cap Restricted of flow in cooling system Loose or missing drive belt Faulty engine coolant pump Faulty temperature sensor wiring Faulty electric fan Faulty thermo-sensor on radiator Insufficient coolant	Replace Replace Replace Adjust or replace Replace Repair or replace Repair or replace Replace Refill coolant
Abnormally low coolant temperature	Faulty thermostat Faulty temperature sensor wiring	Replace Repair or replace

G00789970

Fig. 26: Trouble Shooting Table (1 Of 2)
Courtesy of HYUNDAI MOTOR CO.

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Symptom	Probable cause	Remedy
Leakage from oil cooling system	Loose connections Broken pipe or muffler	Retighten Repair or replace
Exhaust gas leakage	Loose connections Broken pipe or muffler	Retighten Repair or replace
Abnormal noise	Detached baffle plate in muffler Broken rubber hanger Pipe or muffler contacting vehicle body Broken pipe or muffler	Replace Replace Correct Repair or replace


G00789971

Fig. 27: Trouble Shooting Table (2 Of 2)
Courtesy of HYUNDAI MOTOR CO.

ENGINE BLOCK

ENGINE BLOCK

Components

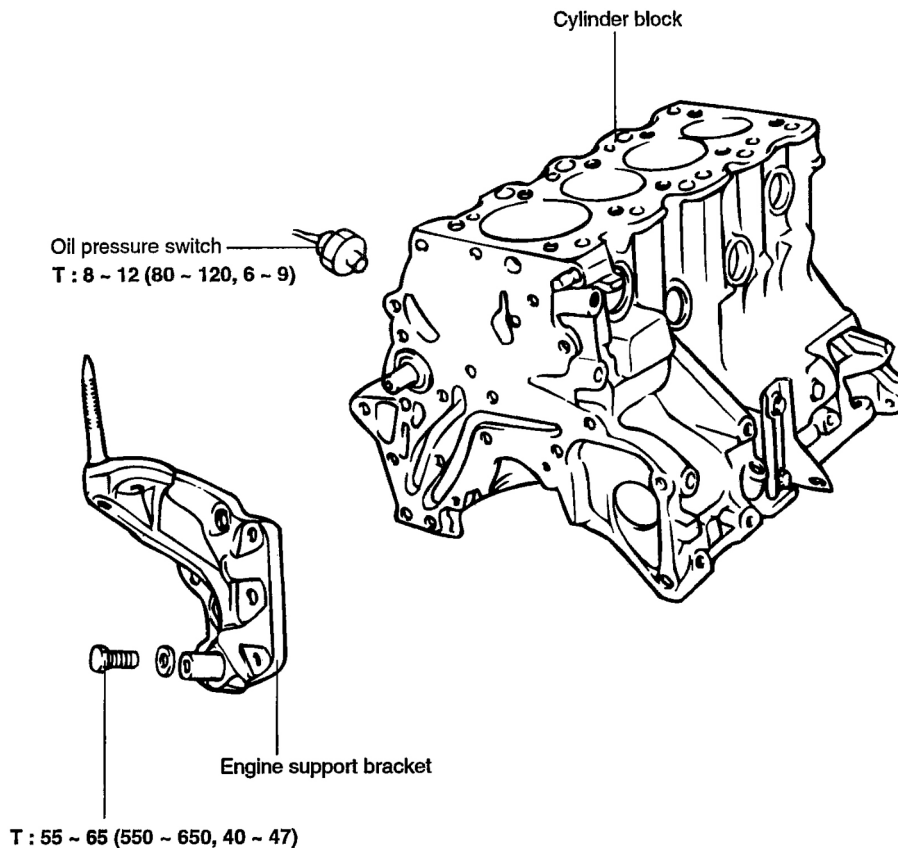

TORQUE : Nm (kg-cm, lb-ft)

G00789972

Fig. 28: Engine Block Components
Courtesy of HYUNDAI MOTOR CO.

Disassembly

Remove the following :

- Cylinder head. See CYLINDER HEAD.
- Timing belt. See TIMING BELT.
- Front case. See FRONT CASE.
- Flywheel.
- Pistons. See PISTON.
- Crankshaft. See CRANKSHAFT.

Inspection


1. Check the cylinder block for scores, rust and corrosion. Also check for cracks or any other defects. Replace the block if defective.

2. Measure the cylinder bore with a cylinder gauge at the three levels indicated and in the directions of A and B.

Level 1: No. 1 piston ring position at TDC

Level 2 : Center of cylinder

Level 3 : Bottom of cylinder

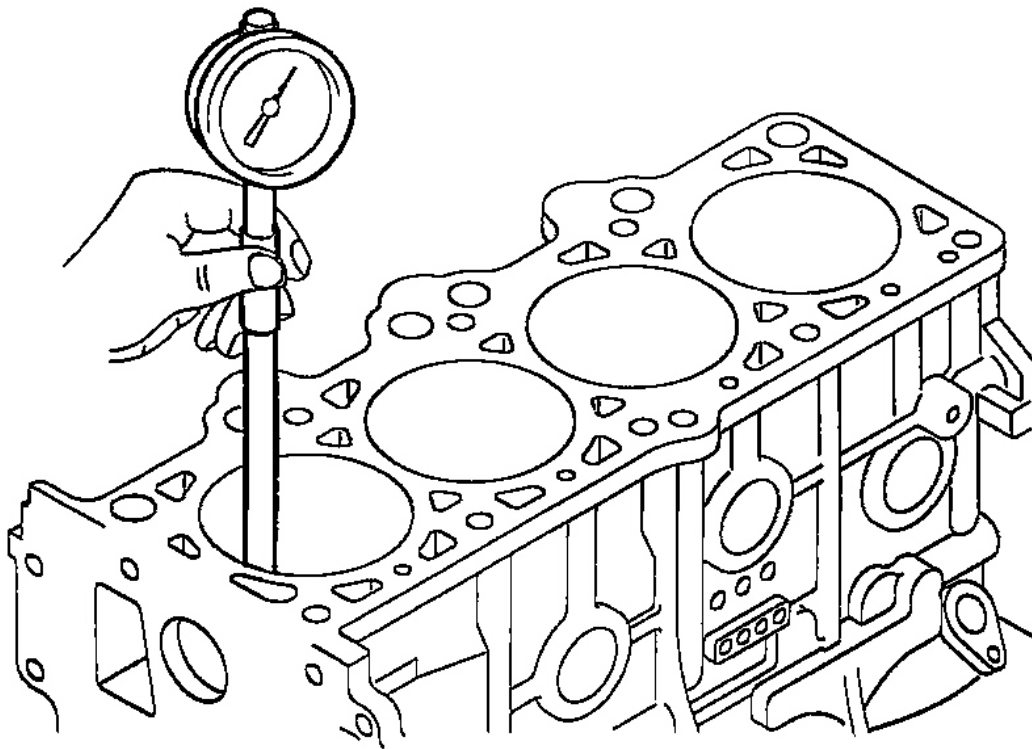

G00789973

Fig. 29: Measuring The Cylinder Bore
 Courtesy of HYUNDAI MOTOR CO.

3. If the cylinder bores show more than specified out-of-round or taper, or if the cylinder walls are badly scuffed or scored, the cylinder block should be rebored and honed. New oversize piston and rings should be installed.

Standard value

Cylinder bore : $86.5 + 0.03$ mm ($3.41 + 0.0012$ in.)

Out - of - round and taper of cylinder bore :

Max. 0.01 mm (0.0004 in.)

4. If a ridge exists at the top of the cylinder, cut it away with a ridge reamer.

Piston service size and mark mm (in.)


Identification Mark : 25

Size : 0.25 (0.010) O.S.

5. To rebore the cylinder bore to oversize, maintain the specified clearance between the oversize piston and the bore, and make sure that all pistons used are of the same oversize. The standard measurement of the piston outside diameter is taken at a level 16 mm (0.63 in.) from the center of pin hole and across the thrust faces.

Piston - to - cylinder clearance

0.02 ~ 0.04 mm (0.0008 ~ 0.0016 in)

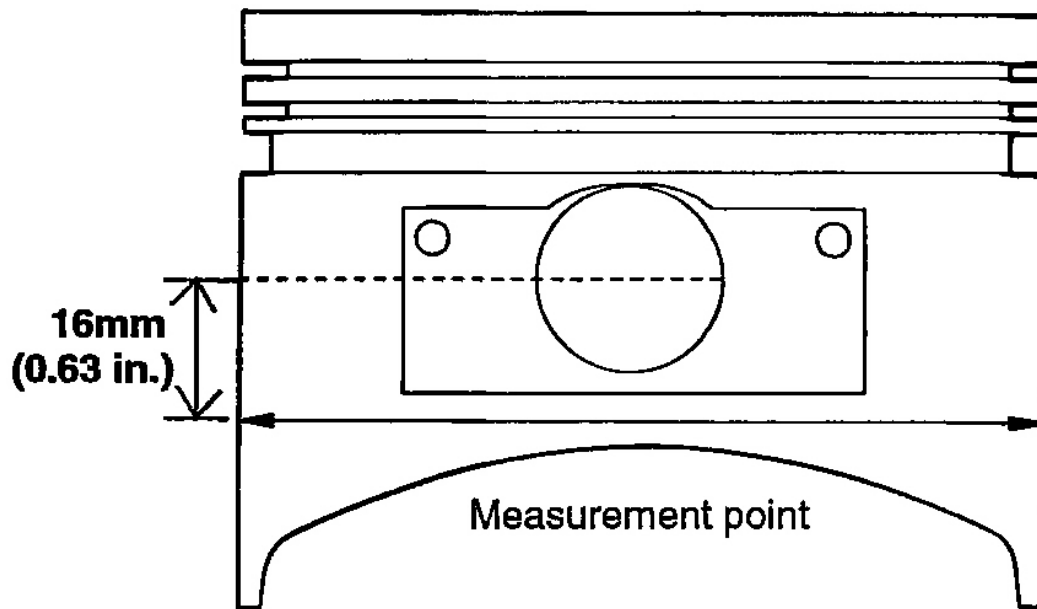

G00789974

Fig. 30: Measuring Point On Piston Skirt
Courtesy of HYUNDAI MOTOR CO.

6. Check for damage and cracks.
7. Check the top surface of the cylinder block for flatness. If the top surface exceeds limits, surface to minimum limit or replace.


Standard value

Flatness of cylinder block : Max. 0.05mm (0.0020 in.)

Service limit

Flatness of cylinder block: 0.1 mm (0.0039 in.)

NOTE: When the cylinder head is assembled, grinding less than 0.2 mm (0.008 in.) is permissible.

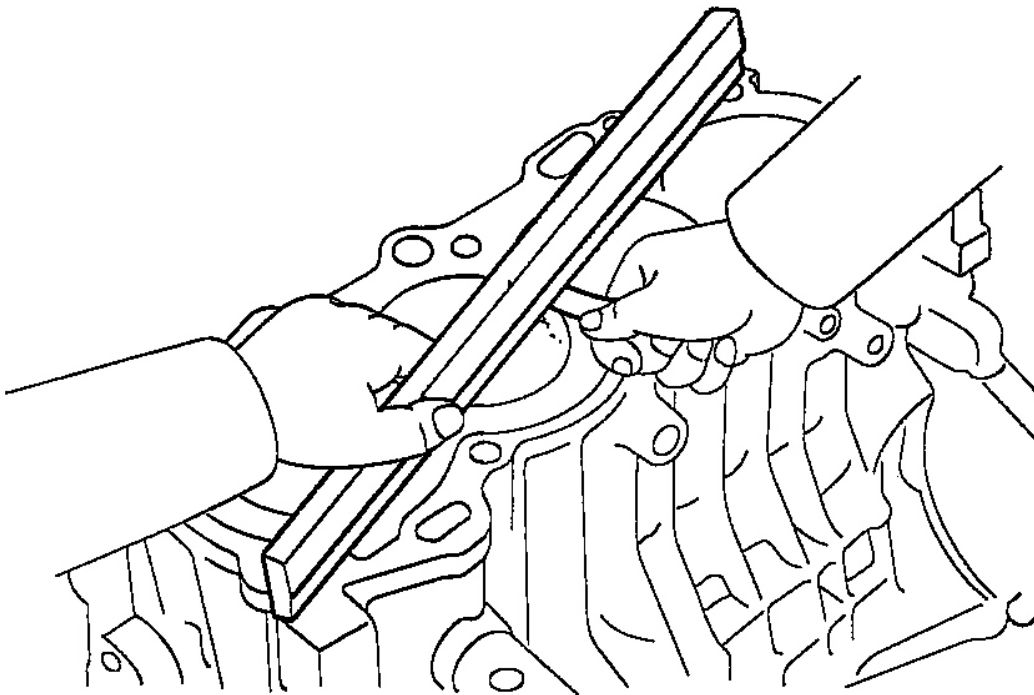

G00789975

Fig. 31: Checking Top Surface Of Cylinder Block
Courtesy of HYUNDAI MOTOR CO.

Boring Cylinder

1. Oversize pistons should be selected according to the largest cylinder bore.

Identification Mark : 25

Size : 0.25 mm (0.010 in.) O.S.

NOTE: **The size of a piston is stamped on top of the piston.**

2. Measure the outside diameter of the piston to be used.
3. On the basis of the measured O.D., calculate the new bore size.

New bore size = Piston O.D + 0.02 to 0.04 mm (0.0008 to 0.0016 in.) (clearance between piston and cylinder) - 0.02 mm (0.0008 in.) (honing margin.)

4. Bore each of cylinders to the calculated size.

NOTE: **To prevent distortion that may result from temperature rise during honing, bore the cylinders, holes in the firing order sequence.**

5. Hone the cylinders, finishing them to the proper dimension (piston outside diameter + gap with cylinder).
6. Verify the clearance between the piston and cylinder.

NOTE: **When boring cylinders, finish all four cylinders to the same oversize. Do not bore only one cylinder to the oversize.**


Reassembly

Install the following parts by referring to their respective paragraphs.

1. Crankshaft
2. Flywheel
3. Piston
4. Cylinder head
5. Timing belt train
6. Front case

ENGINE MOUNTS

Components

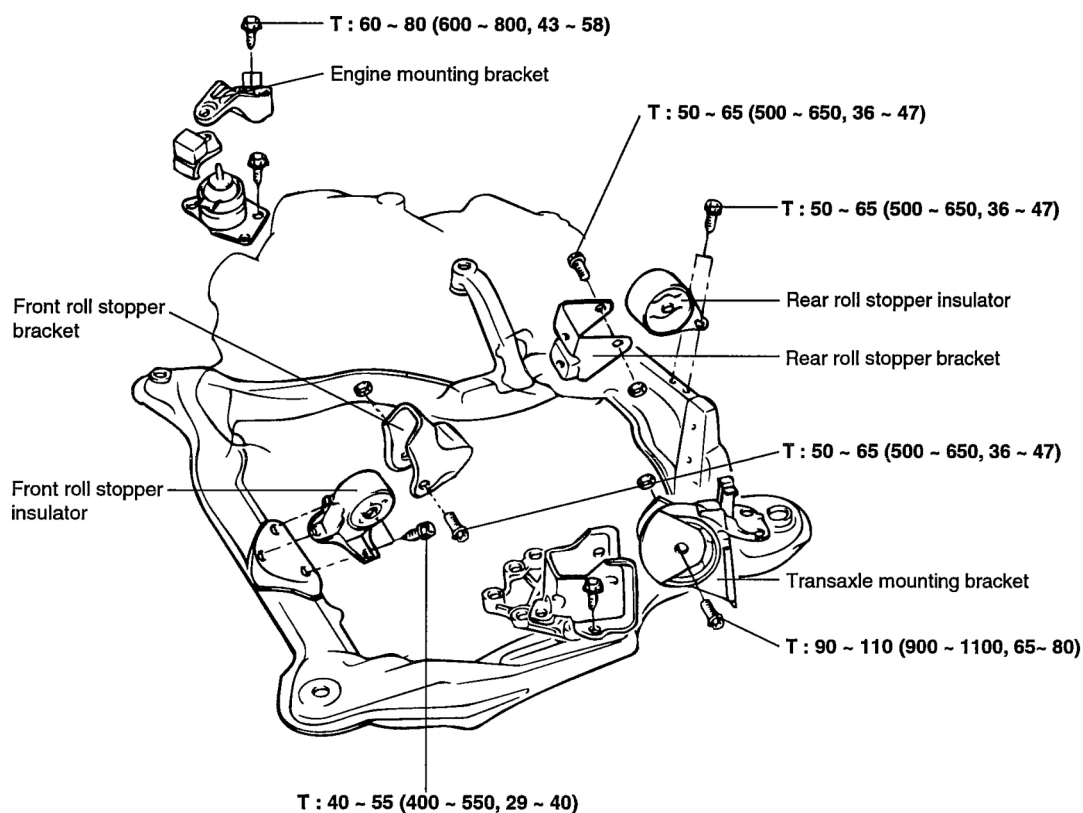


TORQUE : Nm (kg.cm, lb-ft)

G00789976

Fig. 32: Engine Mount Components
Courtesy of HYUNDAI MOTOR CO.

Removal

Attach a chain or cable to the engine hooks and lift enough so that there is no pressure on the motor mounts.

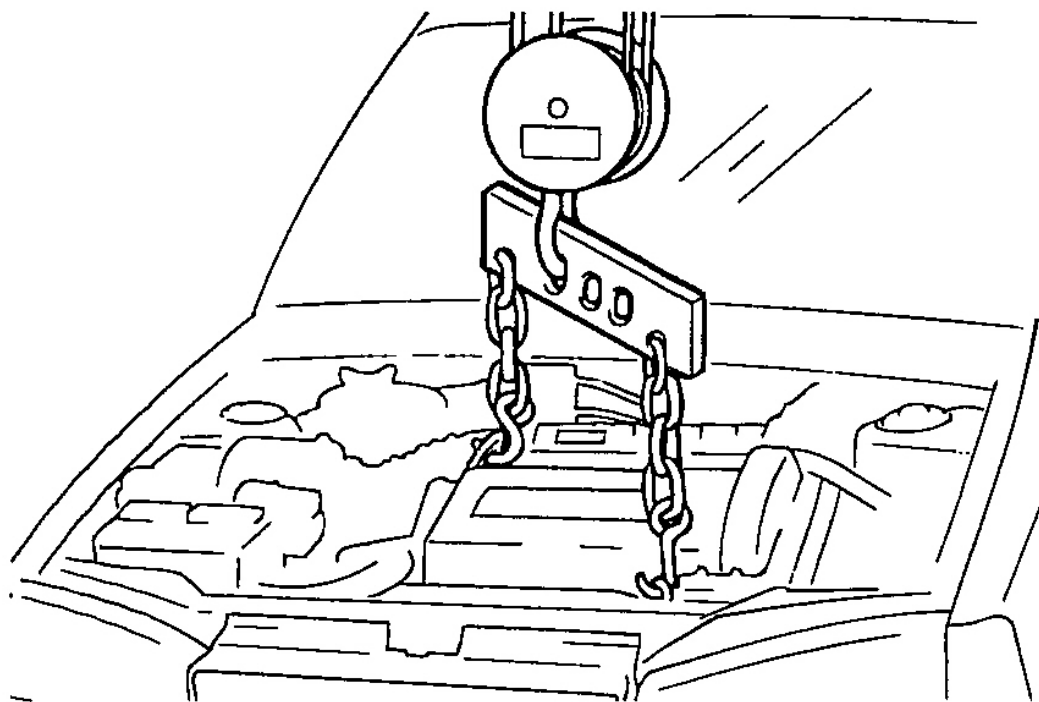


G00789977

Fig. 33: Lifting Engine
Courtesy of HYUNDAI MOTOR CO.

Engine Mounting

1. Remove the engine mounting insulator bolts.
2. Remove the engine mounting bracket from the engine.

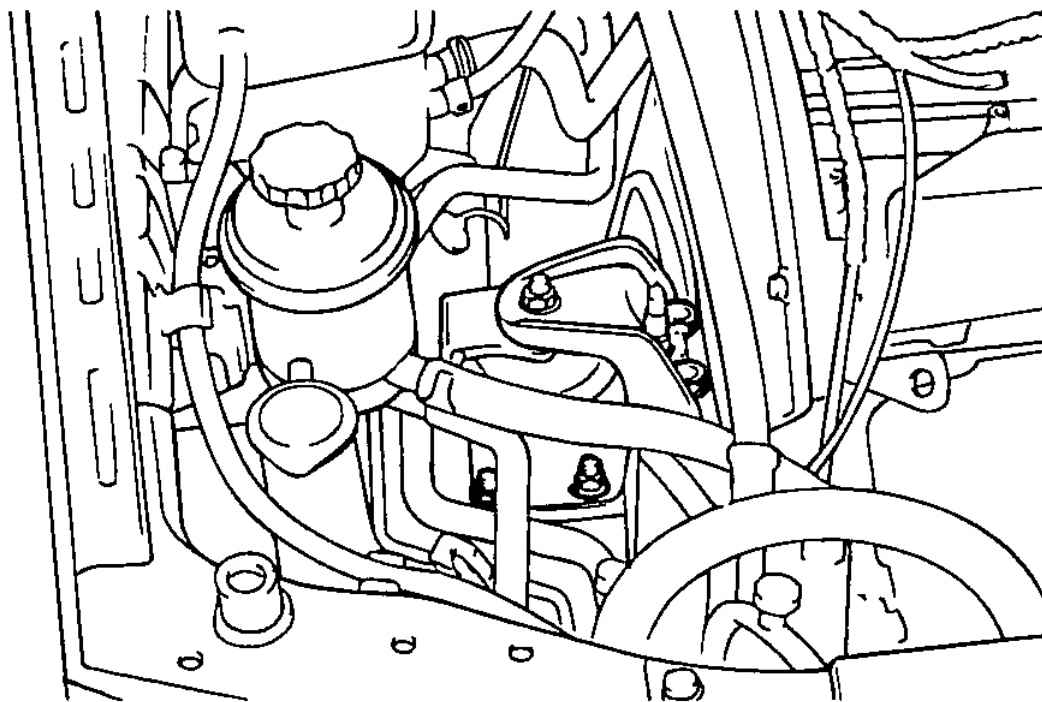


G00789978

Fig. 34: Identifying Engine Mounting Bracket
Courtesy of HYUNDAI MOTOR CO.

Transaxle Mounting

1. Remove the transaxle mounting insulator bolts.
2. Remove the transaxle mounting bracket from the transaxle.

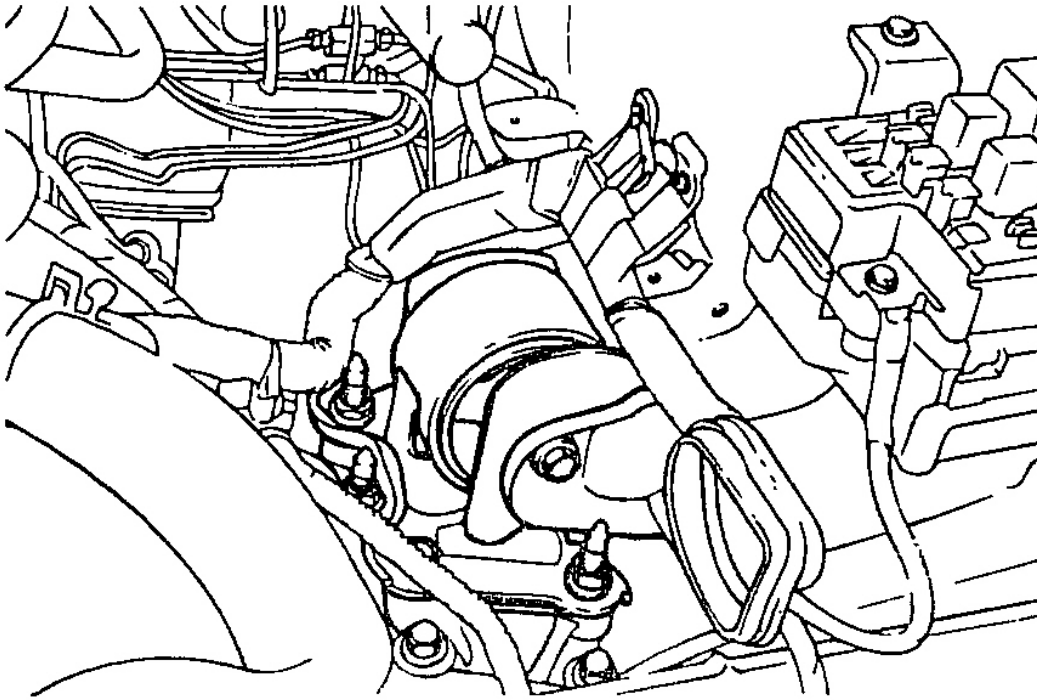


G00789979

Fig. 35: Identifying Transaxle Bracket
Courtesy of HYUNDAI MOTOR CO.

Front Roll Stopper

Remove the front roll stopper bracket from the sub-frame.

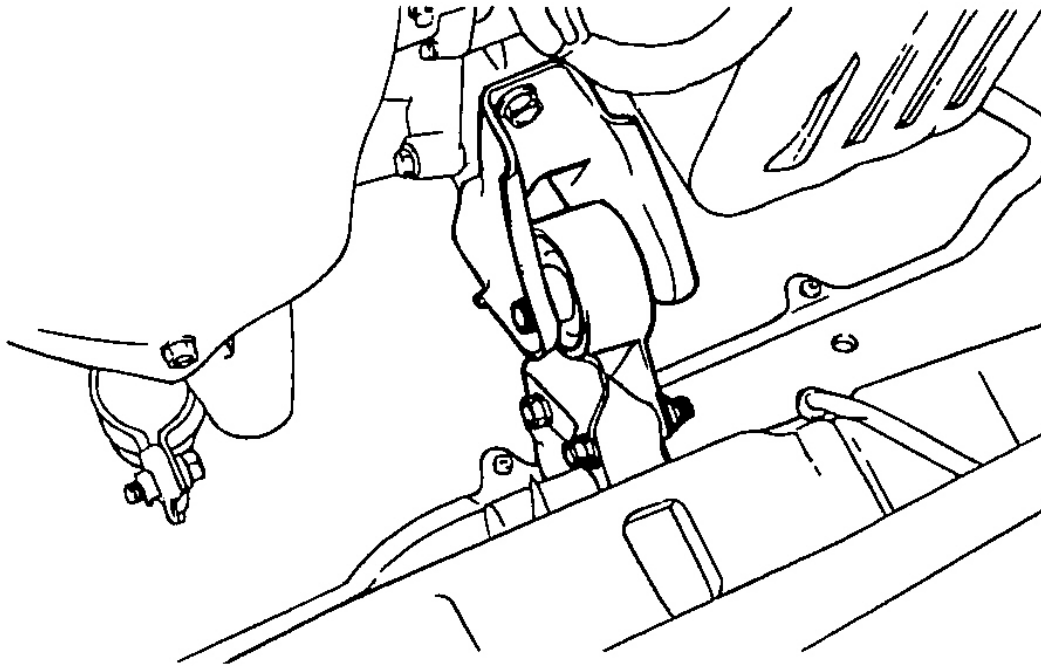


G00789980

Fig. 36: Identifying Front Roller Stopper Bracket
Courtesy of HYUNDAI MOTOR CO.

Rear Roll Stopper

1. Remove the bolt from the rear roll stopper.
2. Remove the rear roll stopper from the subframe.

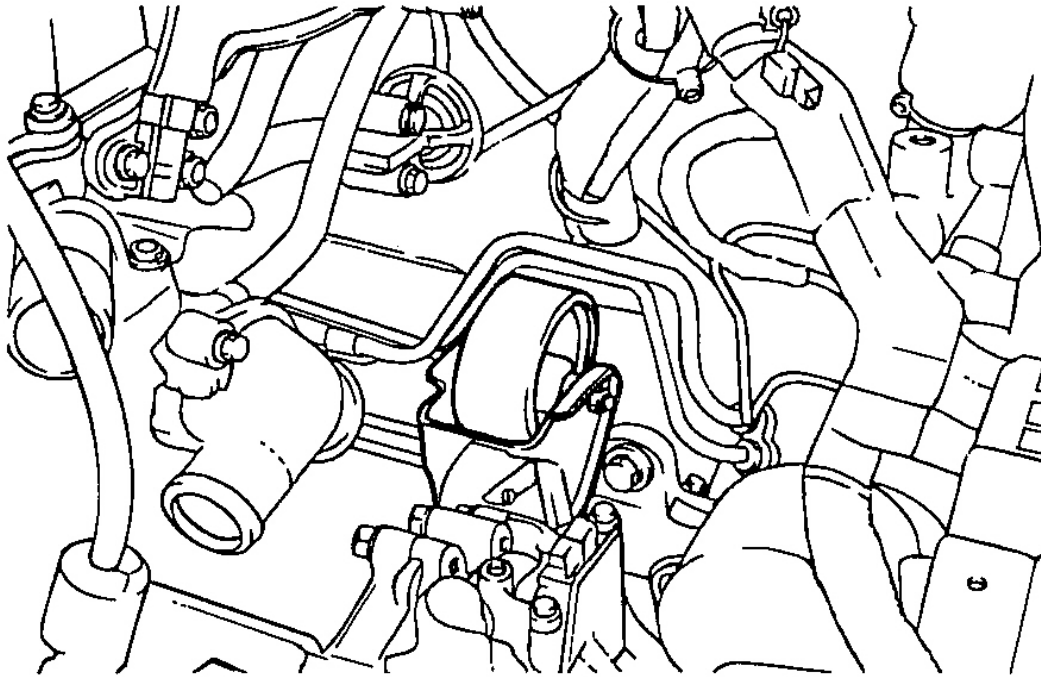


G00789981


Fig. 37: Identifying Rear Roller Stopper Bracket
Courtesy of HYUNDAI MOTOR CO.

Inspection Items


Transaxle mount

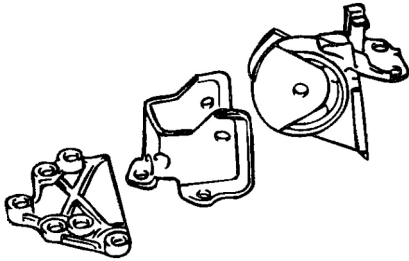


Engine mount



Front roll stopper assembly



Rear roll stopper assembly



G00789982

Fig. 38: View Of Inspection Items
Courtesy of HYUNDAI MOTOR CO.

ENGINE AND TRANSAXLE ASSEMBLY

Removal

1. Remove the battery.
2. Detach the air cleaner.


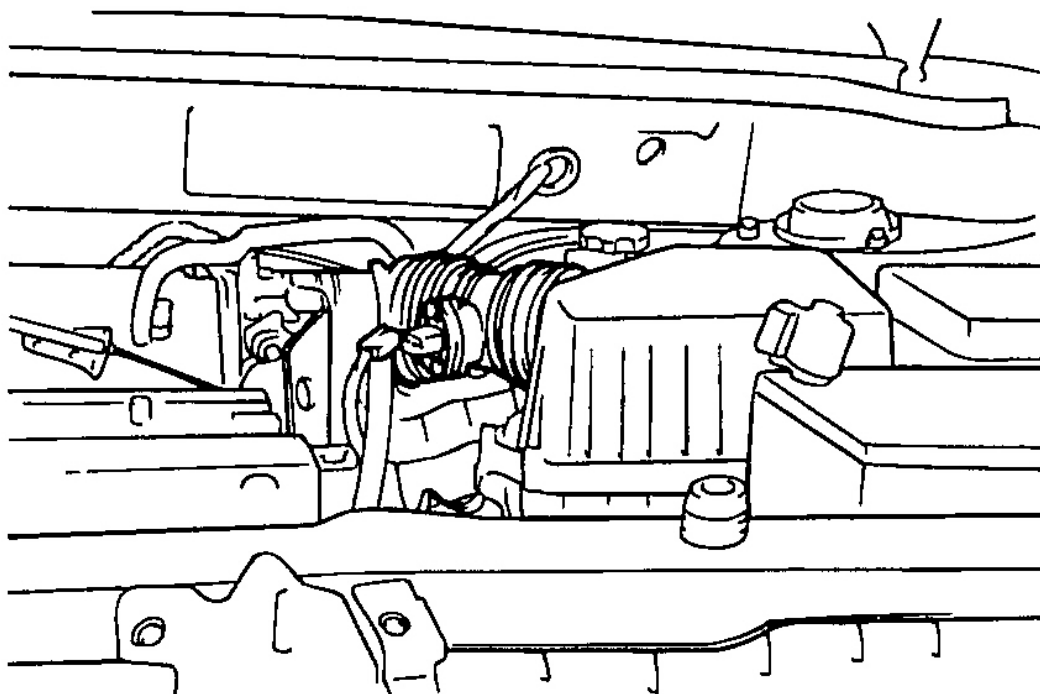
**G00789983**


Fig. 39: View Of Air Cleaner
Courtesy of HYUNDAI MOTOR CO.

3. Disconnect the engine harness connectors.
 1. Engine wiring connectors (alternator, starter, etc.)
 2. TPS connector
 3. Power steering switch connector, oil pressure gauge connector.
 4. Back up lamp switch connector.
 5. A/T solenoid, inhibitor switch connector.
 6. Coolant temperature sensor.
 7. Ignition coil, power TR connector.
 8. Idle speed control valve (ISC) connector.
 9. MAP and ATS connectors.
 10. Oxygen sensor connector.

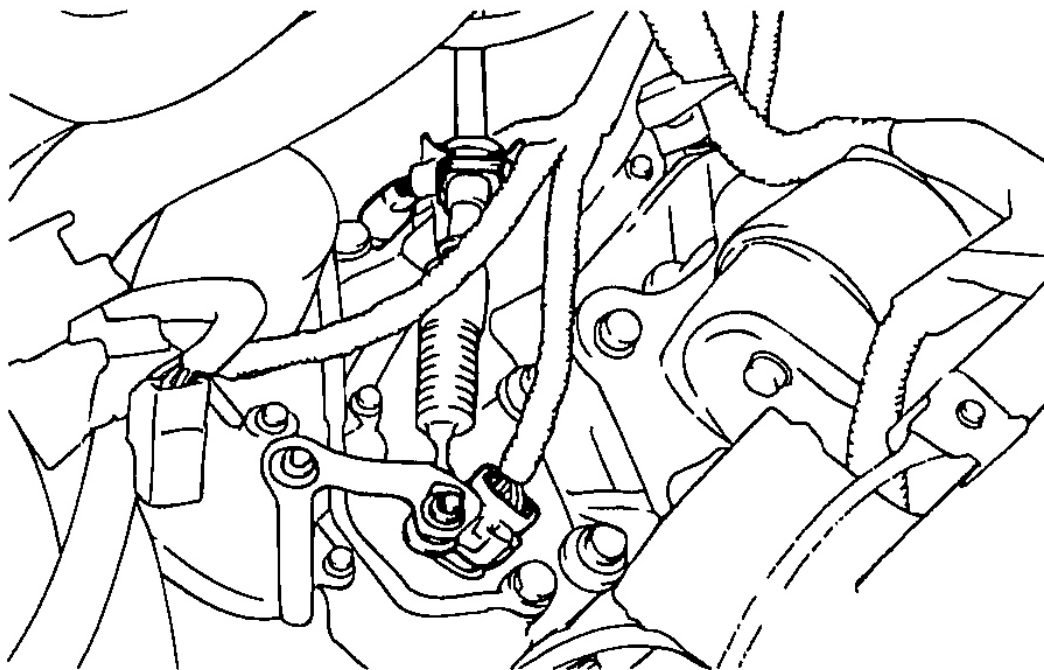

G00789984

Fig. 40: View Transmission Range Sensor
Courtesy of HYUNDAI MOTOR CO.

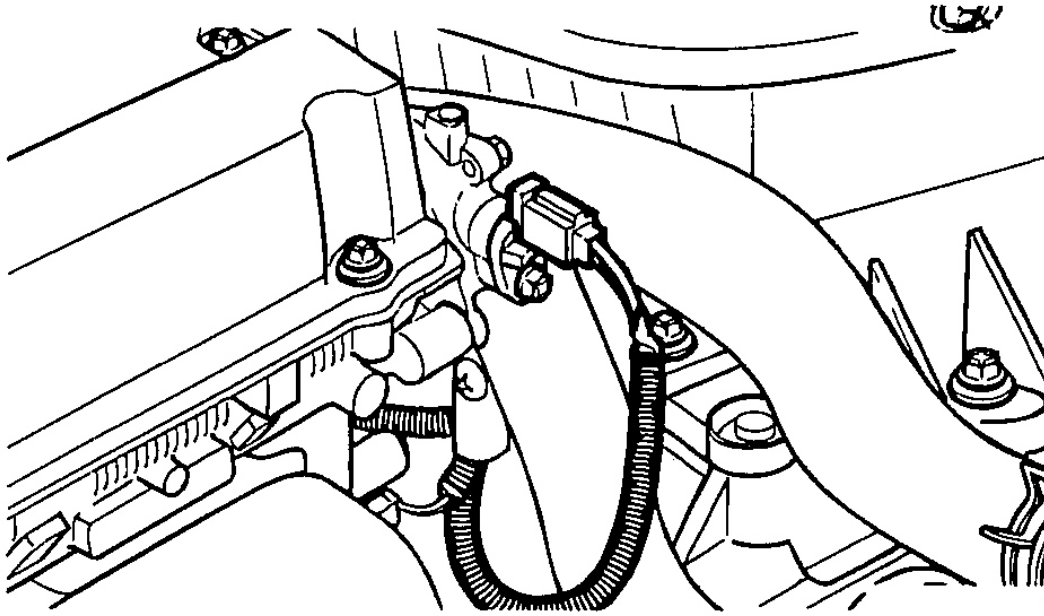

G00789985


Fig. 41: View Engine Coolant Temperature Sensor
Courtesy of HYUNDAI MOTOR CO.

4. Drain the engine coolant.
5. For a vehicle with automatic transaxles, disconnect the transaxle oil cooler hoses.

NOTE: When disconnecting hoses, make identification marks to avoid making any mistake when installing them again.

CAUTION: Be careful not to spill any of oil or fluid out of the hoses. Plug the openings to prevent the entry of foreign material.


6. Disconnect the radiator upper and lower hoses on the engine side then remove the radiator assembly.

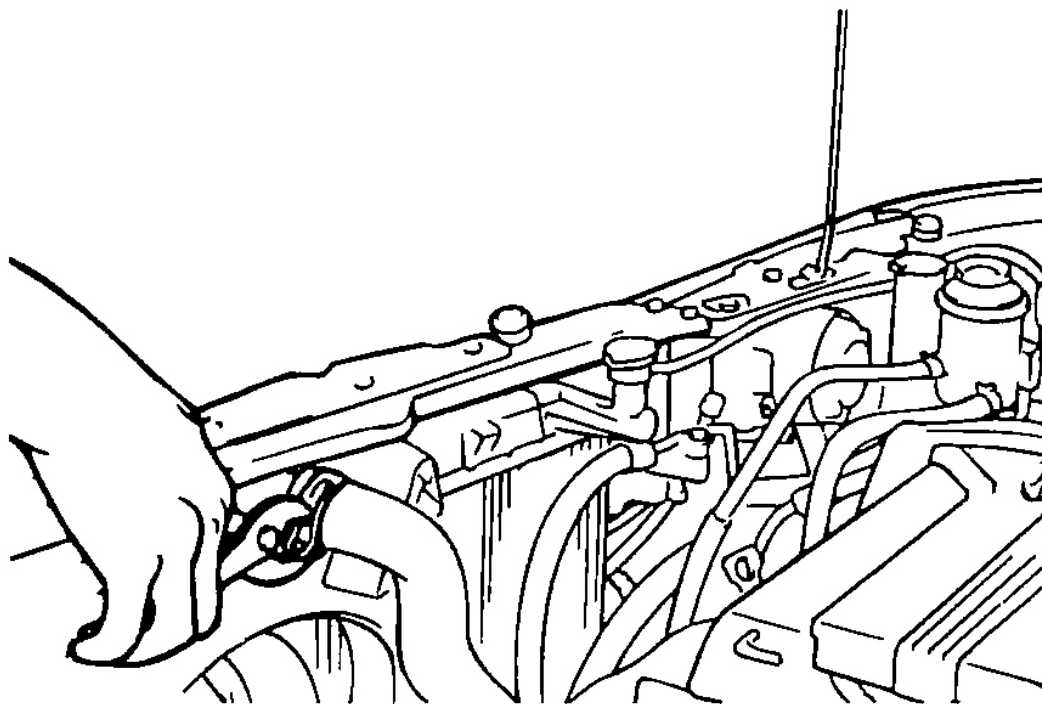

G00789986

Fig. 42: Removing Upper Radiator Hose
Courtesy of HYUNDAI MOTOR CO.


7. Disconnect the engine ground.
8. Disconnect the brake booster vacuum hose.

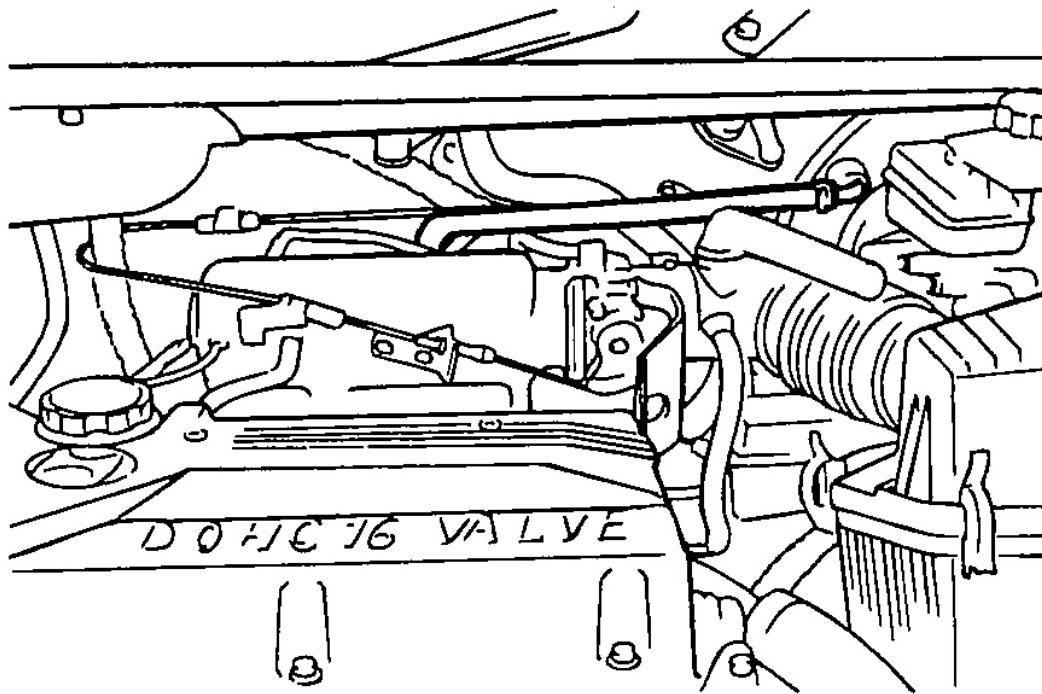

G00789987

Fig. 43: Identifying Brake Booster Vacuum Hose
Courtesy of HYUNDAI MOTOR CO.


9. Disconnect the heater hoses (inlet and outlet) on the engine side.
10. Disconnect the accelerator cable at the engine side.

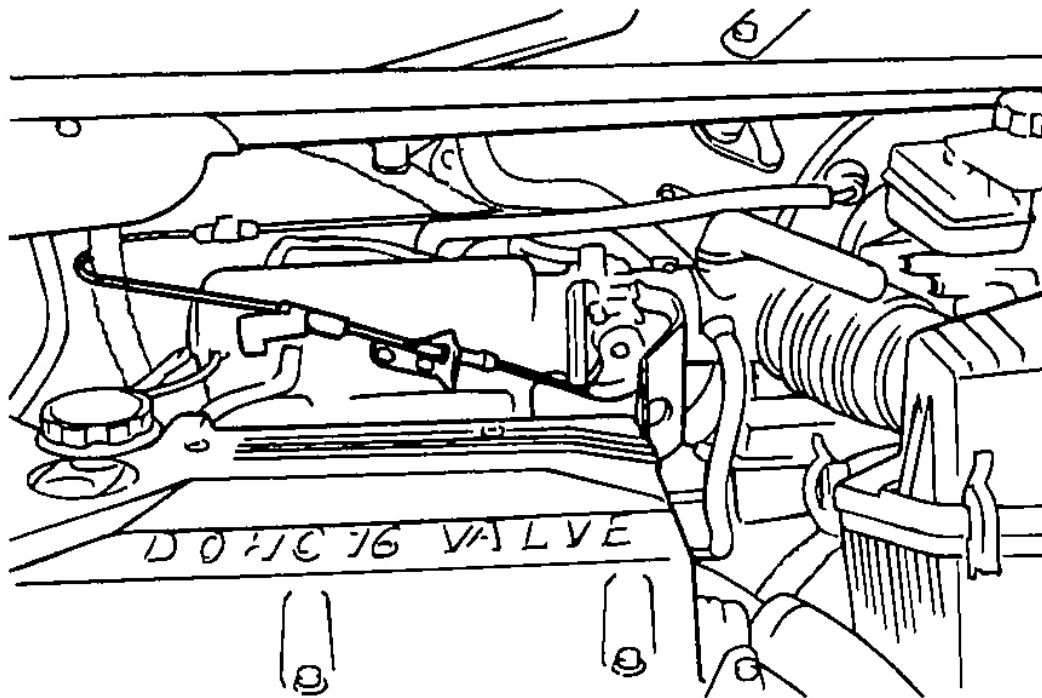

G00789988

Fig. 44: Identifying Accelerator Cable
Courtesy of HYUNDAI MOTOR CO.


11. Using a special tool, remove the main fuel line at the delivery pipe (supply/return).
12. Disconnect the speedometer cable from the transaxle.
13. Disconnect the clutch cable or control cable from the transaxle.

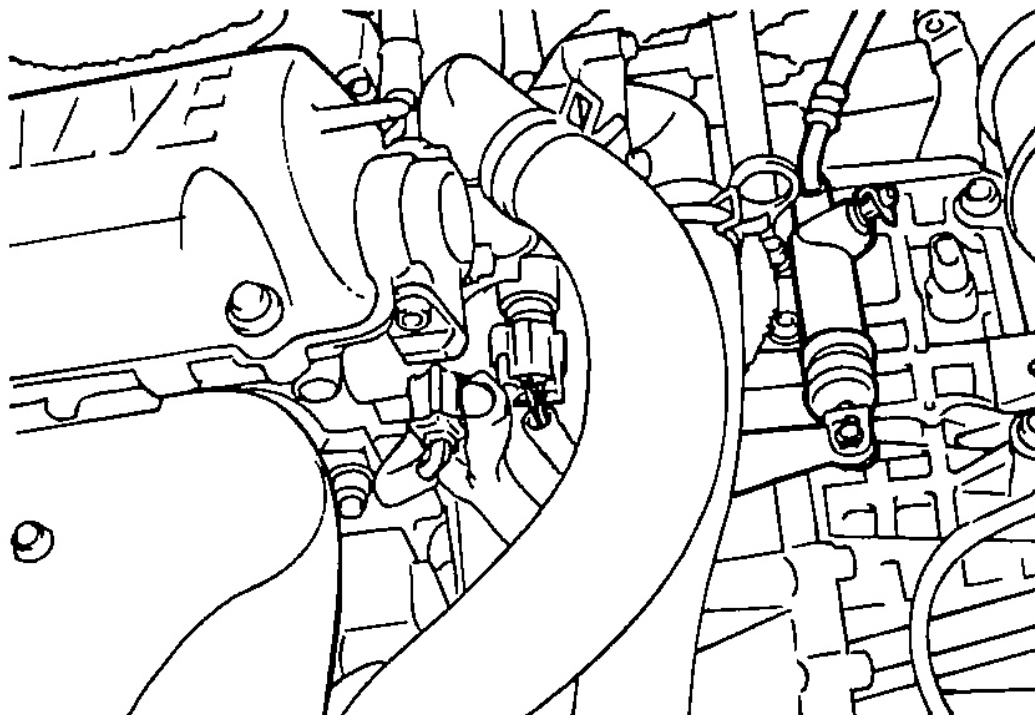

G00789989

Fig. 45: Identifying Clutch Cable Or Control Cable
Courtesy of HYUNDAI MOTOR CO.

14. Disconnect the power steering suction hose and return hose from the pump.

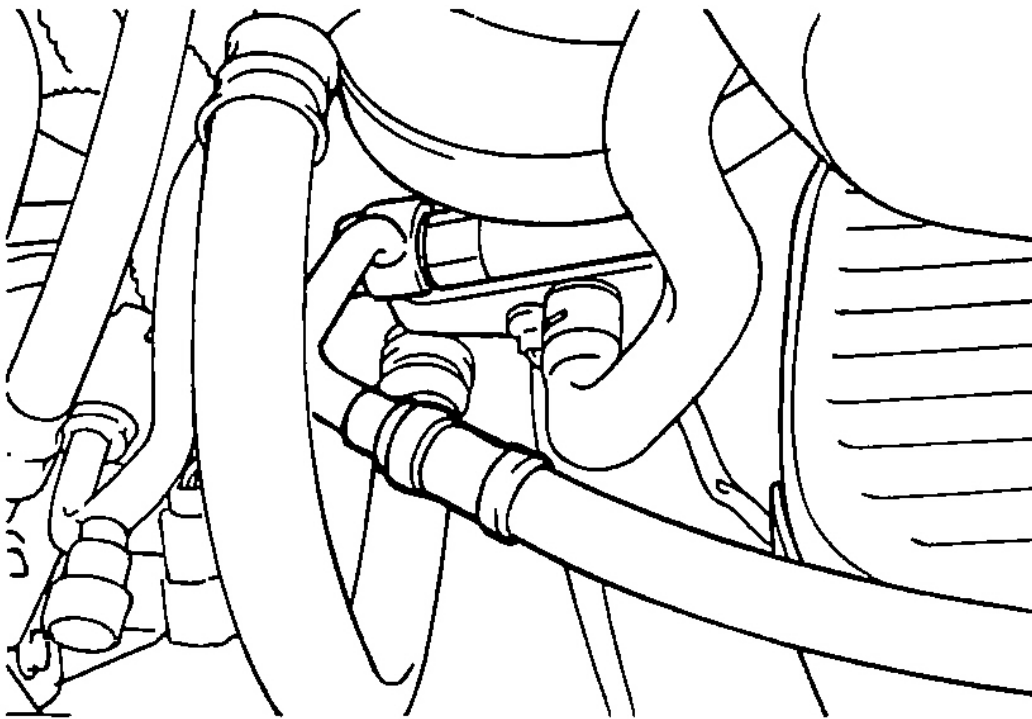


G00789990

Fig. 46: Identifying Power Steering Hoses
Courtesy of HYUNDAI MOTOR CO.

15. Detach the steering dust cover in the engine compartment and then disconnect the gear box universal joint bolt.


NOTE: **Make sure to make identification marks between the universal joint and the gear box for reassembly.**

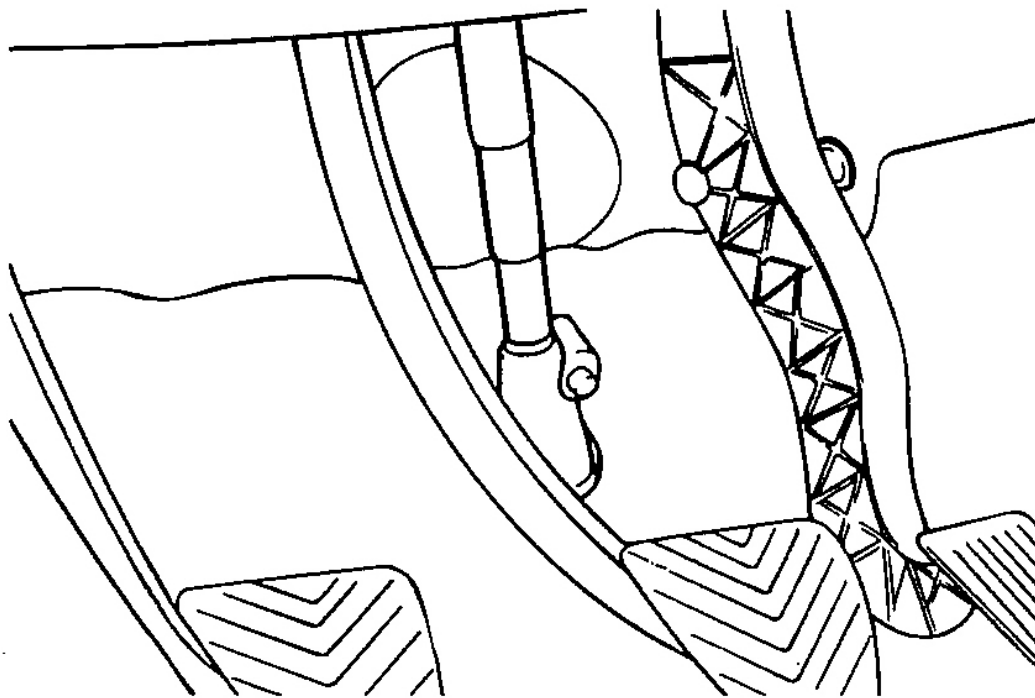

G00789991

Fig. 47: Identifying Steering Column Through Floor Board Location
Courtesy of HYUNDAI MOTOR CO.


16. Raise the vehicle and then remove the front tire.
17. Remove the calliper assembly from the knuckle. Tie it using wire, hang it from the suspension.

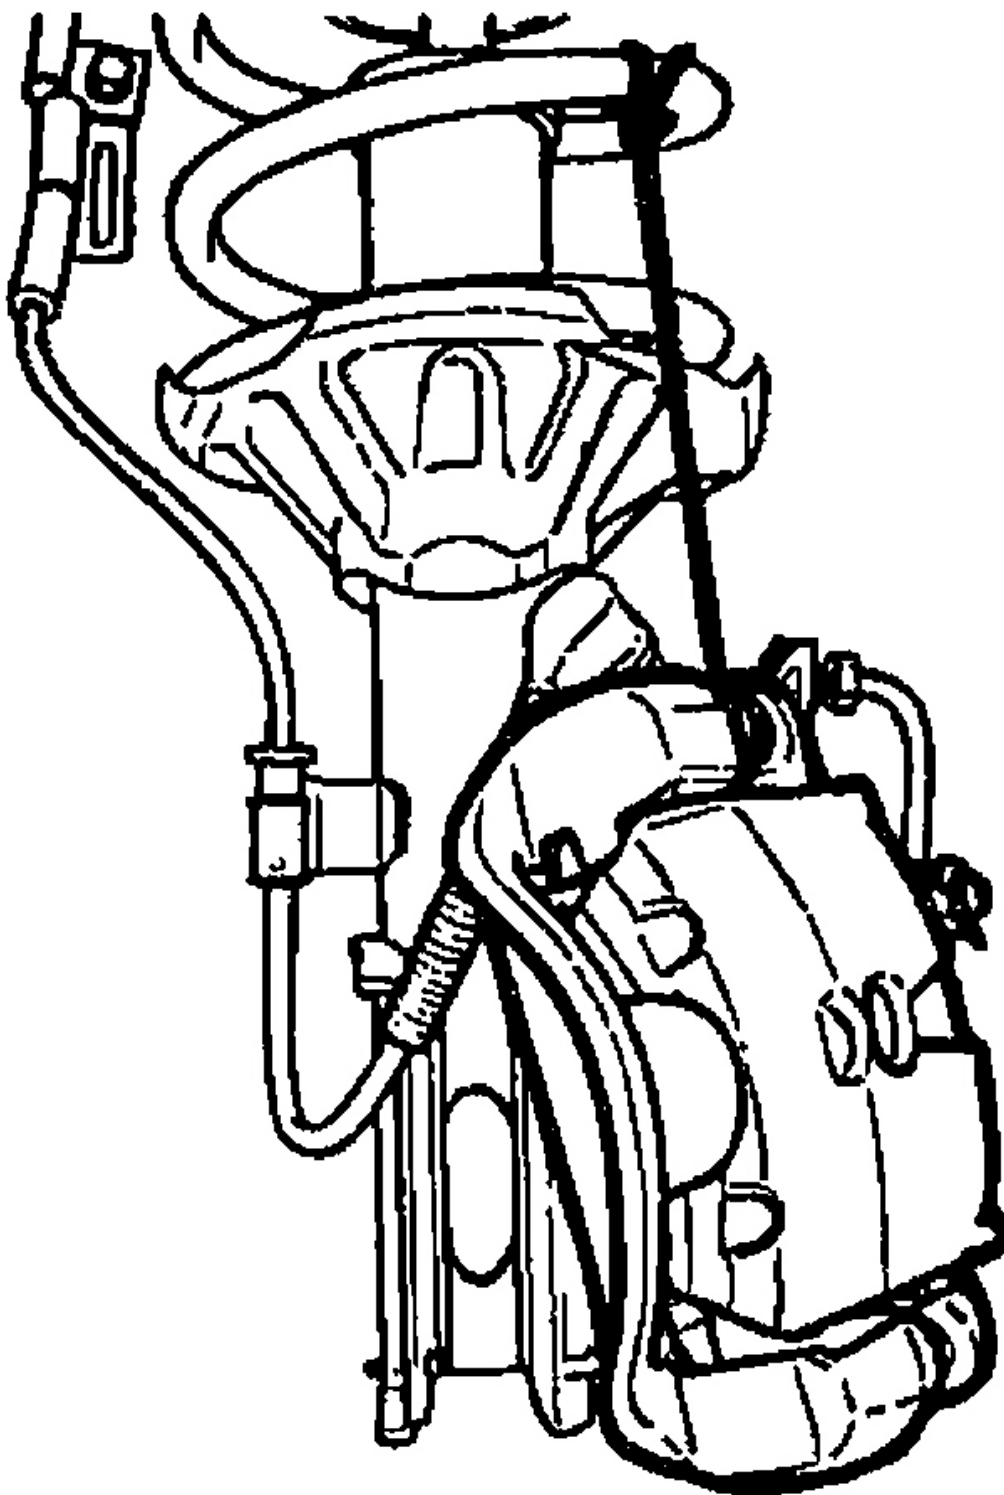

G00789992

Fig. 48: Supporting Brake Caliper
Courtesy of HYUNDAI MOTOR CO.


18. Loosen the strut lower bolt and then remove it.

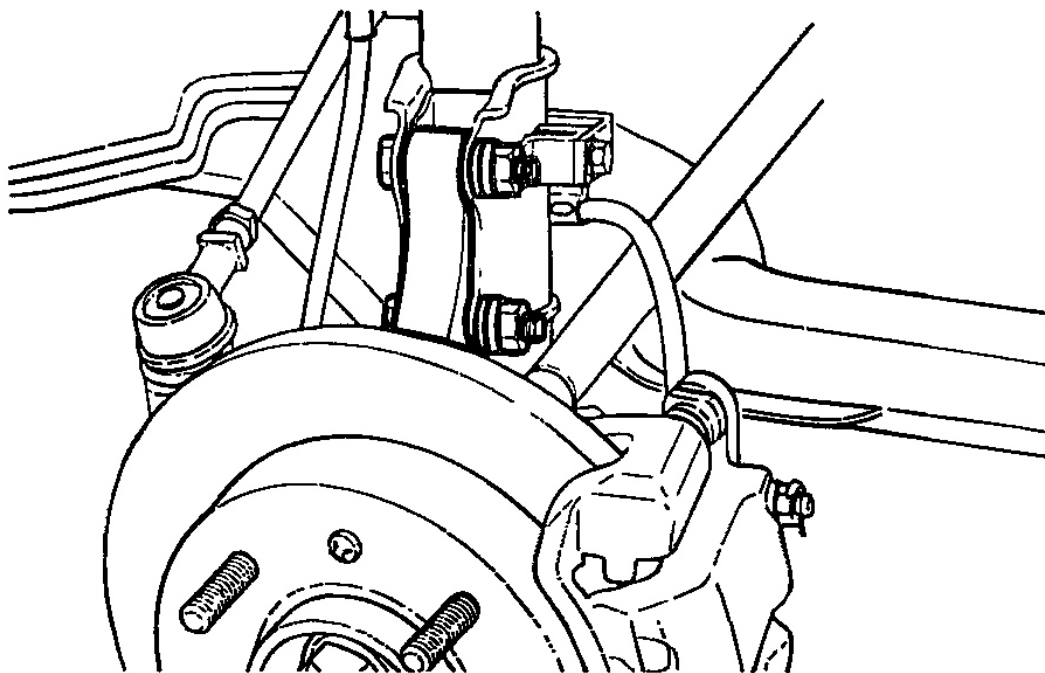

G00789993

Fig. 49: Removing Knuckle From Strut
Courtesy of HYUNDAI MOTOR CO.


19. Drain the transaxle oil.

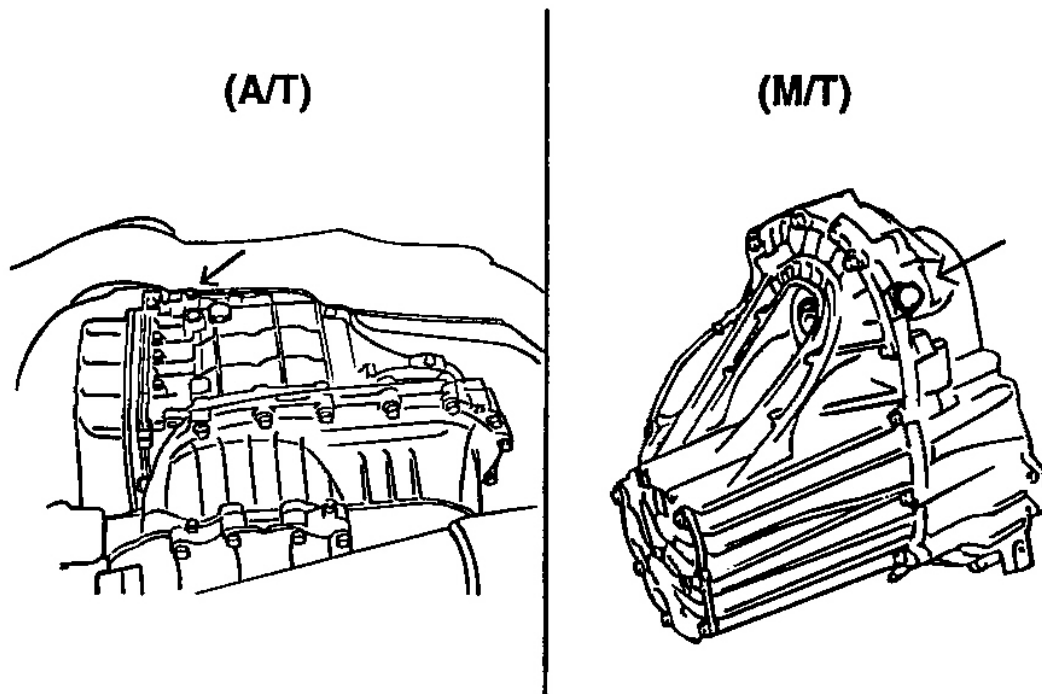

G00789994

Fig. 50: Identifying Drain Plug Bolt
Courtesy of HYUNDAI MOTOR CO.


20. Remove the front muffler bolts.

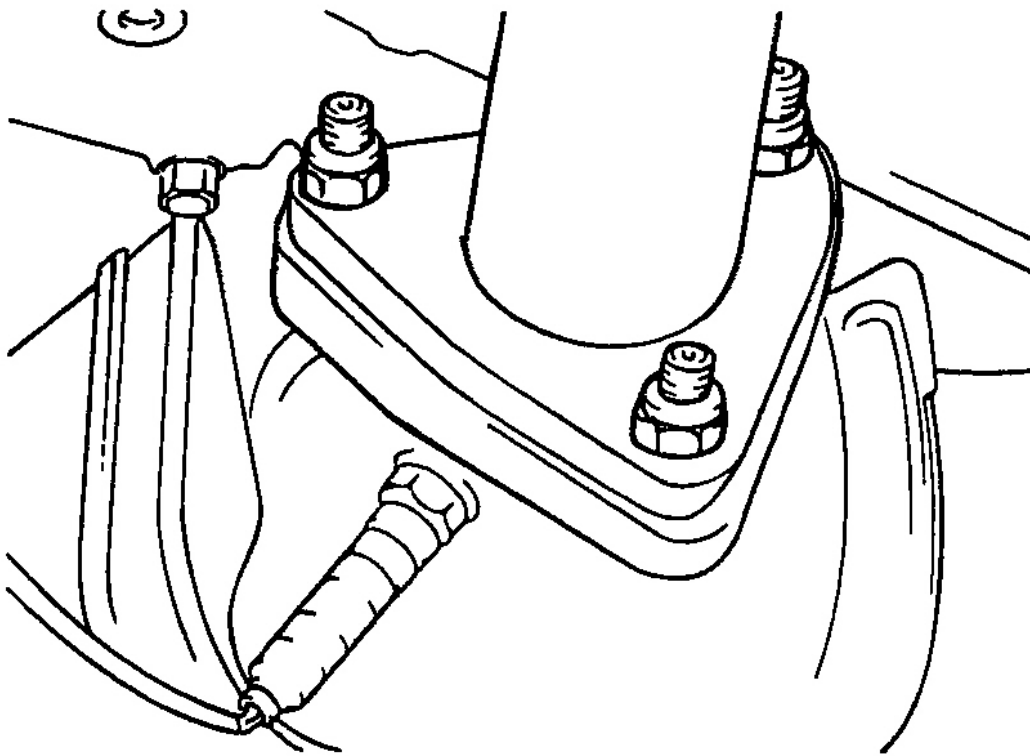

G00789995

Fig. 51: Identifying Front Muffler Bolts
Courtesy of HYUNDAI MOTOR CO.

21. Remove the transaxle control rod and extension rod (M/T only).

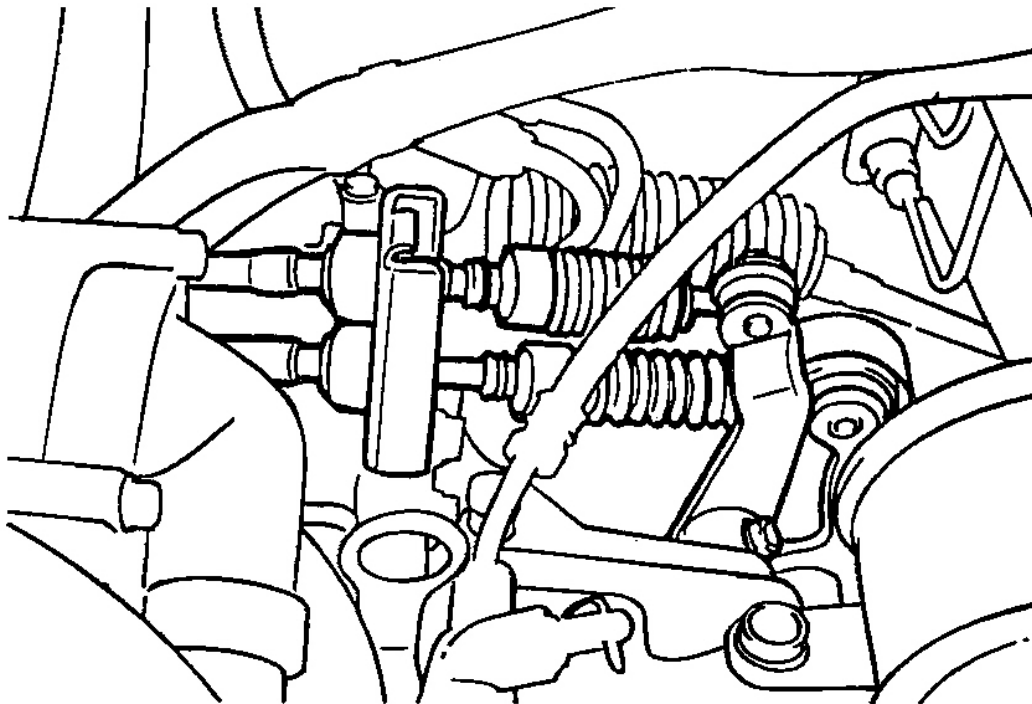


G00789996

Fig. 52: Identifying Transaxle Control Rod & Extension Rod
Courtesy of HYUNDAI MOTOR CO.

22. Put the special fixture on the T/M jack and then adjust it to the sub-frame.

NOTE: Check that all the cables, harness connector and hose are disconnected from the engine and transaxle assembly.

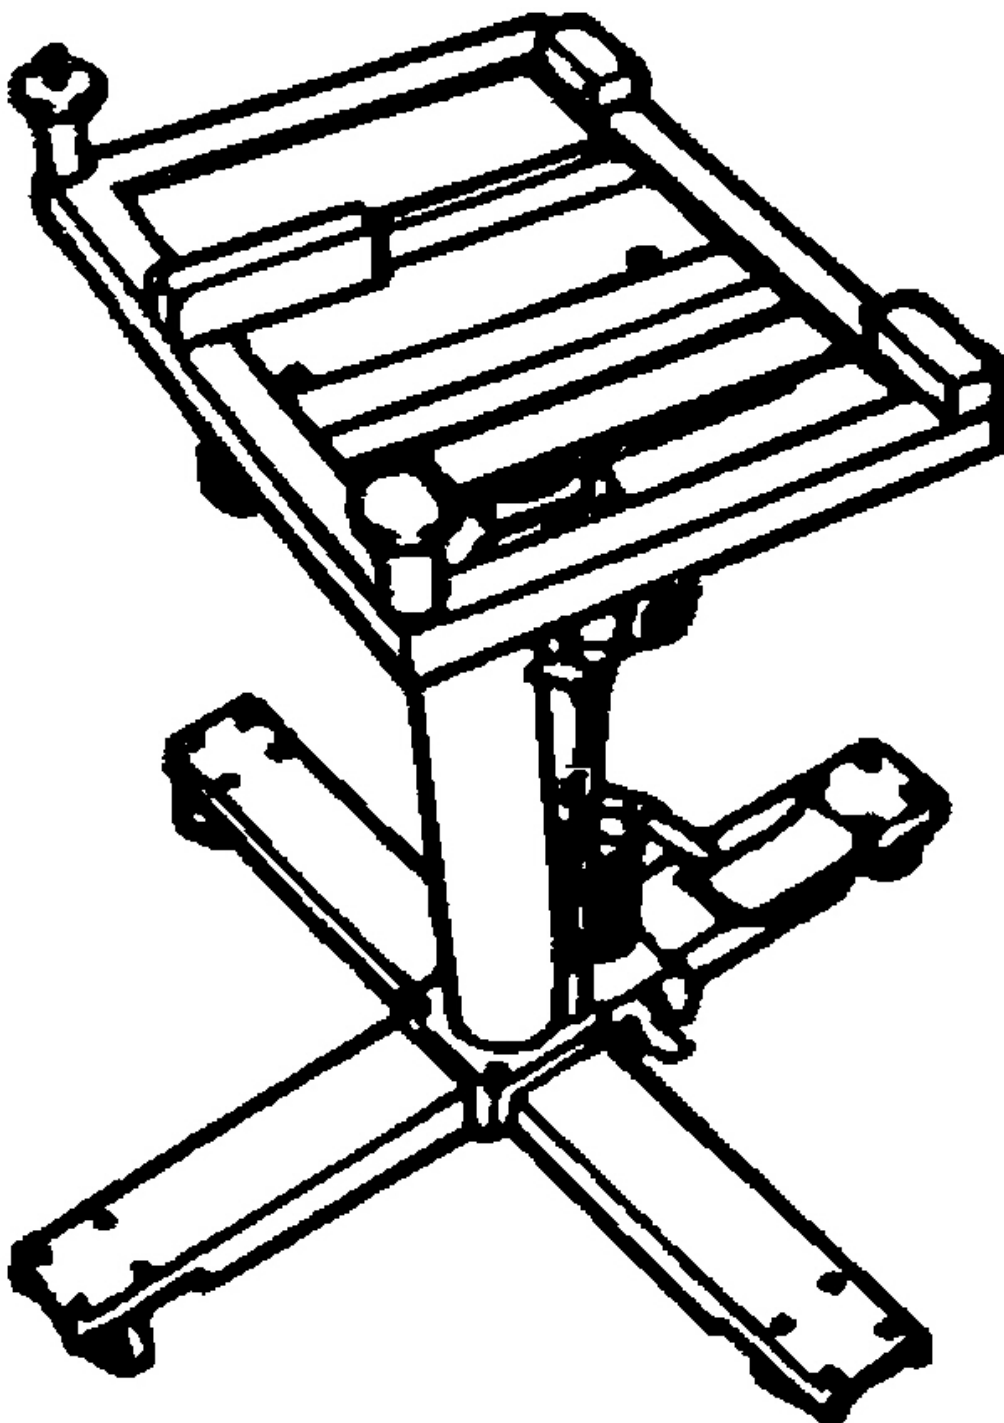


G00789997

Fig. 53: Identifying T/M Jack

Courtesy of HYUNDAI MOTOR CO.


23. Remove the engine mounting bracket and the transaxle mounting bracket.

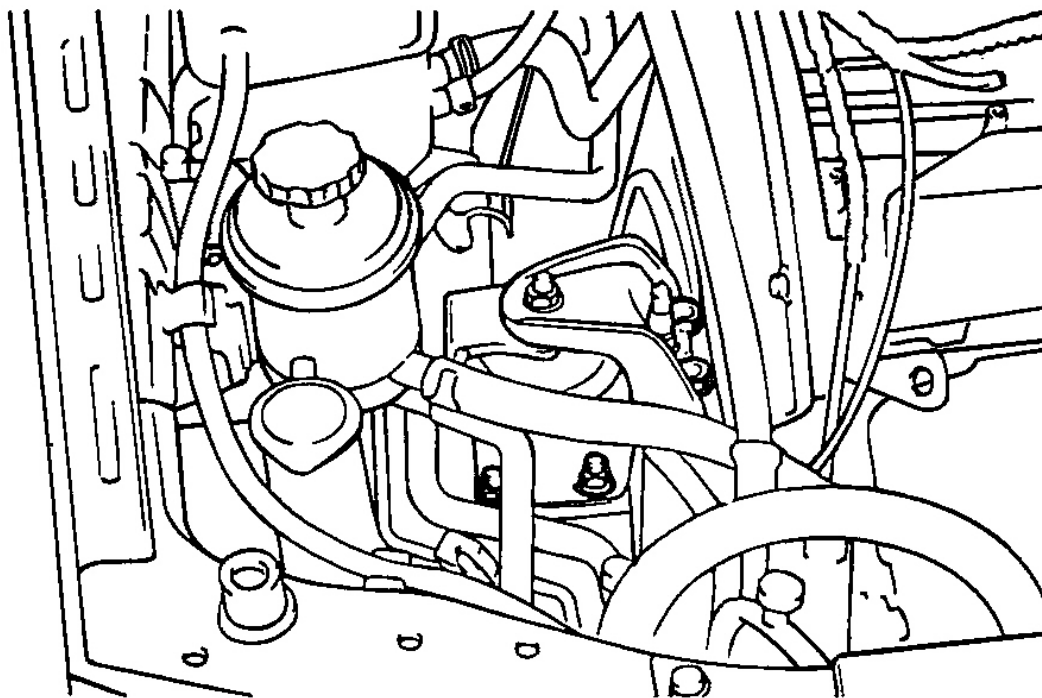

G00789998

Fig. 54: Identifying Engine Mount Bracket


Courtesy of HYUNDAI MOTOR CO.

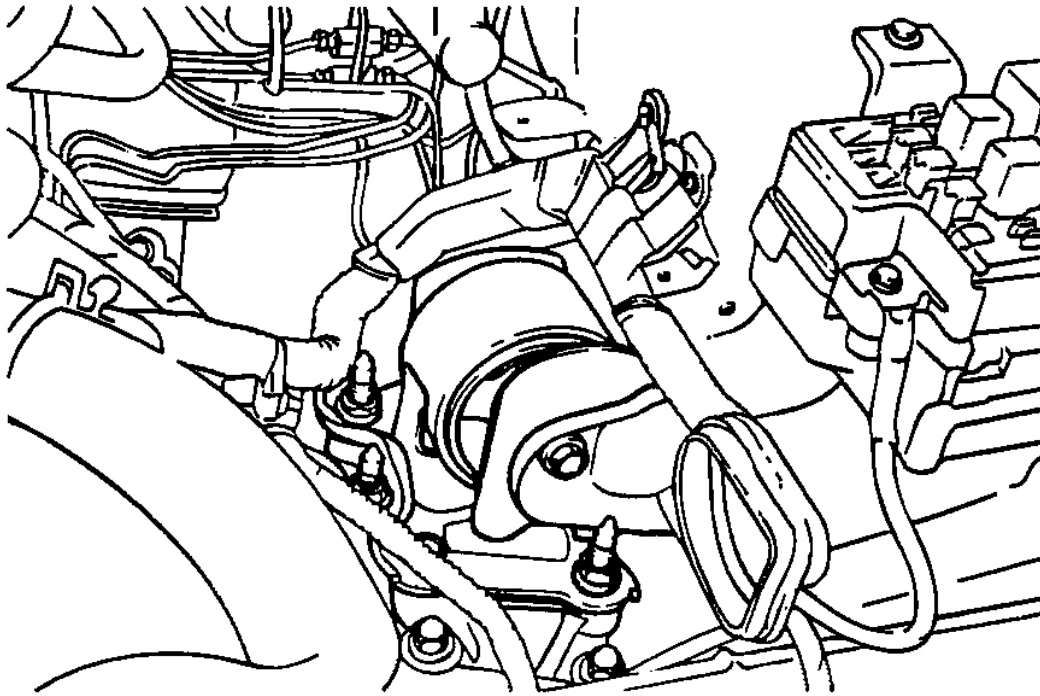

G00789999

Fig. 55: Identifying Transaxle Mounting Bracket
Courtesy of HYUNDAI MOTOR CO.


24. Remove the sub-frame installation bolts.

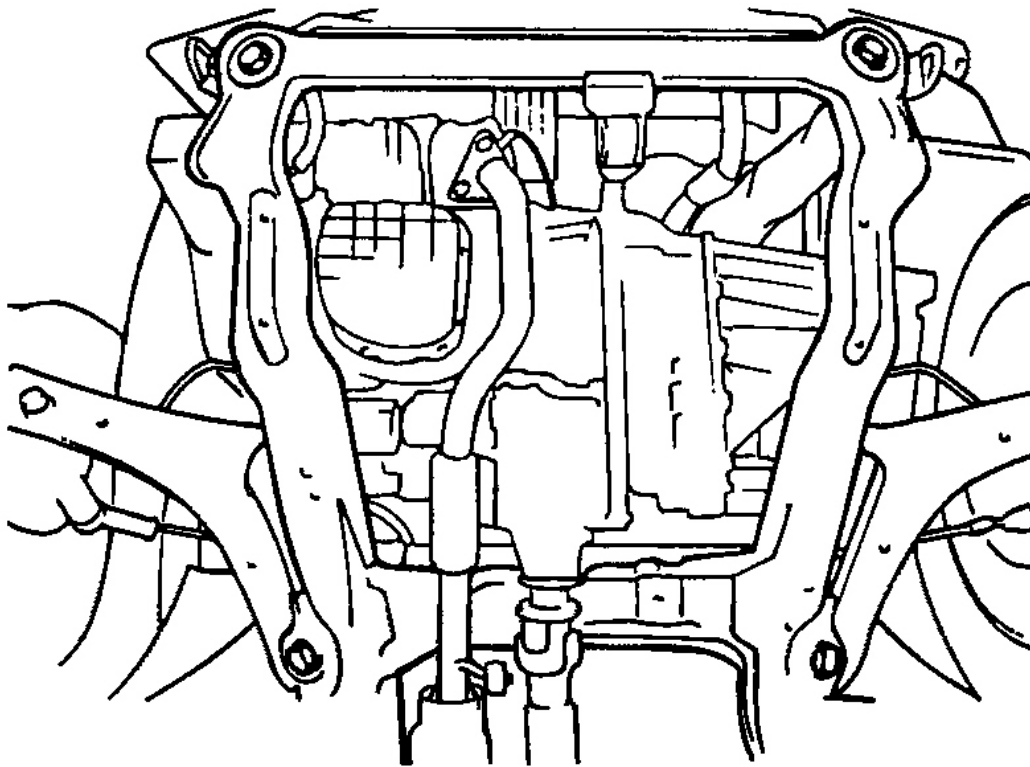

G00790000

Fig. 56: Identifying Sub-Frame Bolts
Courtesy of HYUNDAI MOTOR CO.

25. After removing the drive shaft, lower the engine and transaxle assembly on the jack then, remove the front roll stopper and the rear roll stopper.
26. Remove the engine and transaxle assembly as a unit.

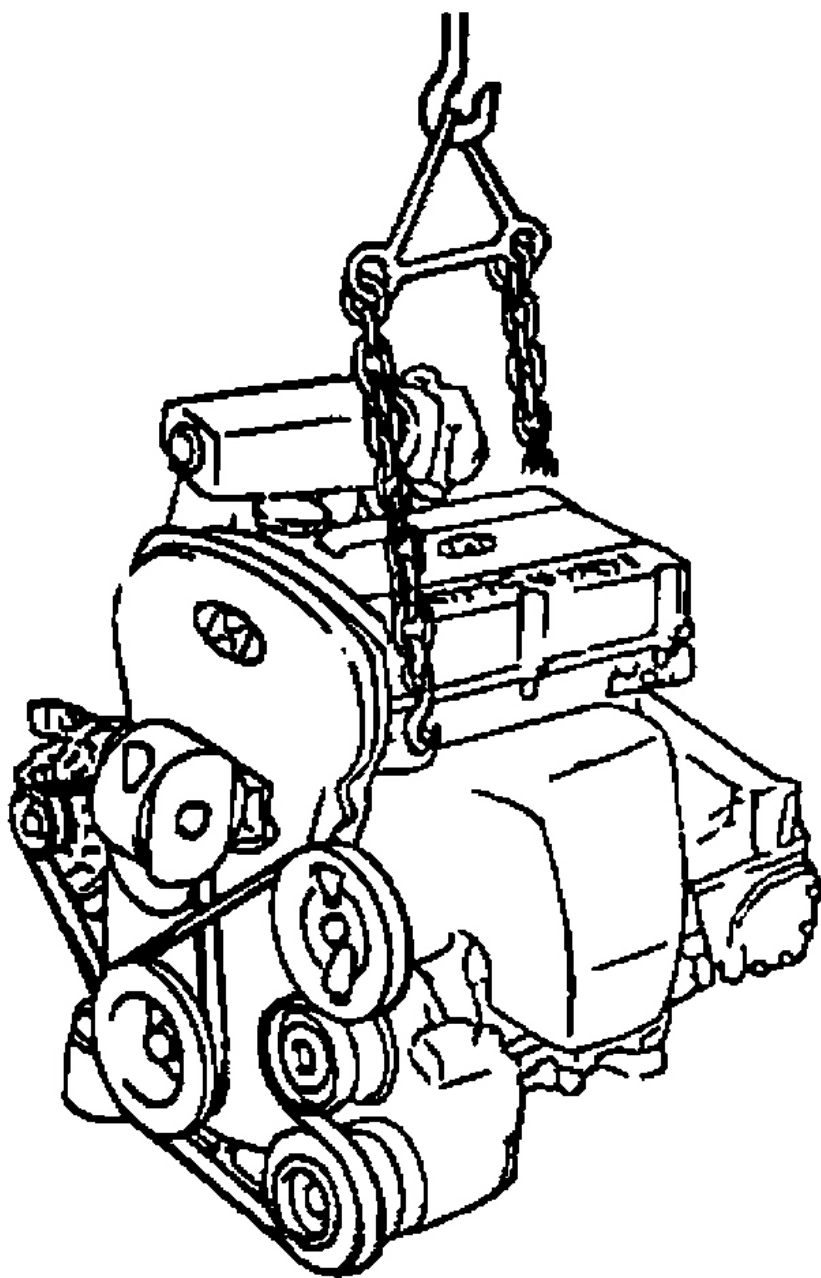

G00790001


Fig. 57: Removing Engine
Courtesy of HYUNDAI MOTOR CO.

Installation

1. When installing the engine and transaxle, check the connections of harnesses, pipes, hoses, etc. make sure that none of them are caught, damaged, etc.
2. Install the front roll stopper to the bracket roughly.

Tightening torque

Service standard : 50 ~ 65 Nm (500 ~ 650 kg.cm, 36 ~ 47 lb.ft)

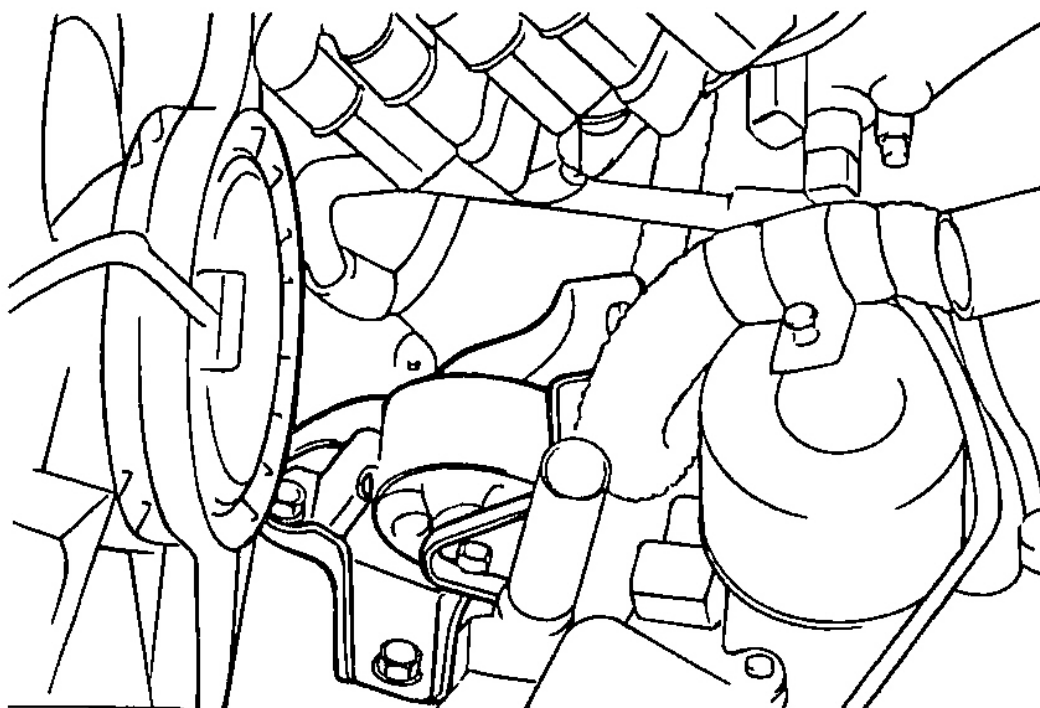


G00790002

Fig. 58: Installing Front Roll Stopper
Courtesy of HYUNDAI MOTOR CO.

3. Install the rear roll stopper to the bracket.

Tightening torque


Service standard : 50 ~ 65 Nm (500 ~ 650 kg.cm, 36 ~ 47 lb.ft)

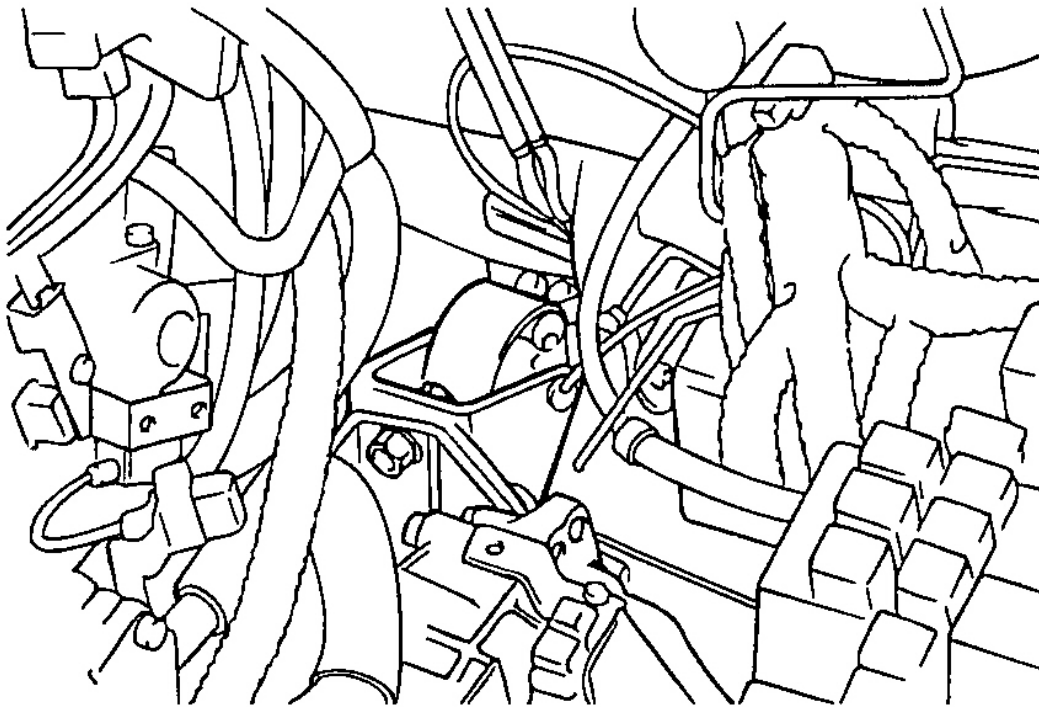

G00790003

Fig. 59: Installing Rear Roll Stopper
Courtesy of HYUNDAI MOTOR CO.

4. Install the engine/transaxle to the sub-frame assembly. Use the T/M jack to raise the assembly slowly adjust it to the vehicle body.

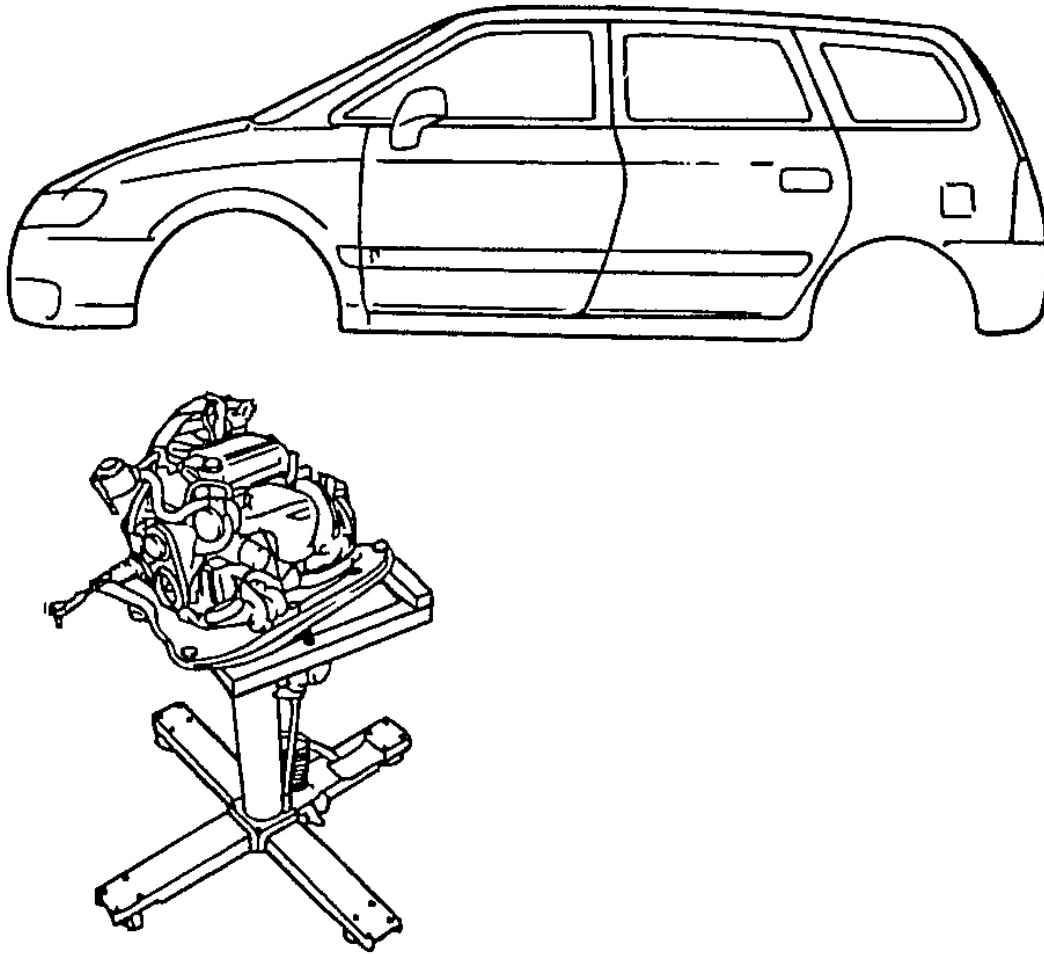

G00790004


Fig. 60: View Of Engine On T/M Jack
Courtesy of HYUNDAI MOTOR CO.

5. Install the transaxle mounting bracket.

Tightening torque

Service standard:

90 ~ 110 Nm (900 ~ 1100 kg.cm, 65 ~ 80 lb.ft)

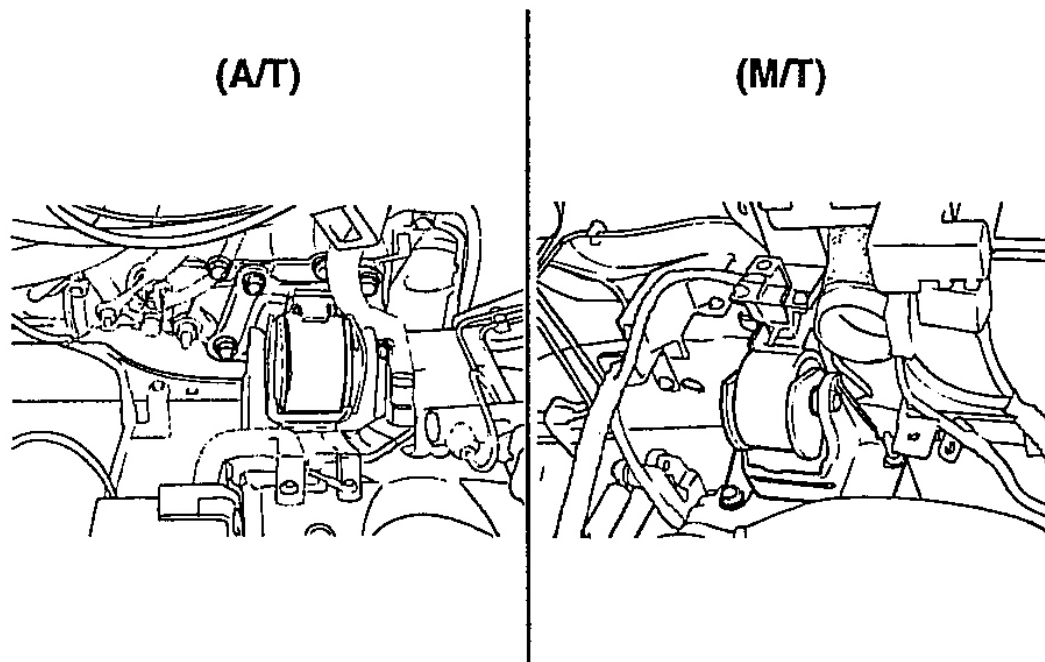

G00790005


Fig. 61: Identifying Transaxle Mounting Bracket
Courtesy of HYUNDAI MOTOR CO.

6. Install the engine bracket (right side).

Tightening torque

Service standard :

60 ~ 80 Nm (600 ~ 800 kg.cm, 43 ~ 58 lb.ft)

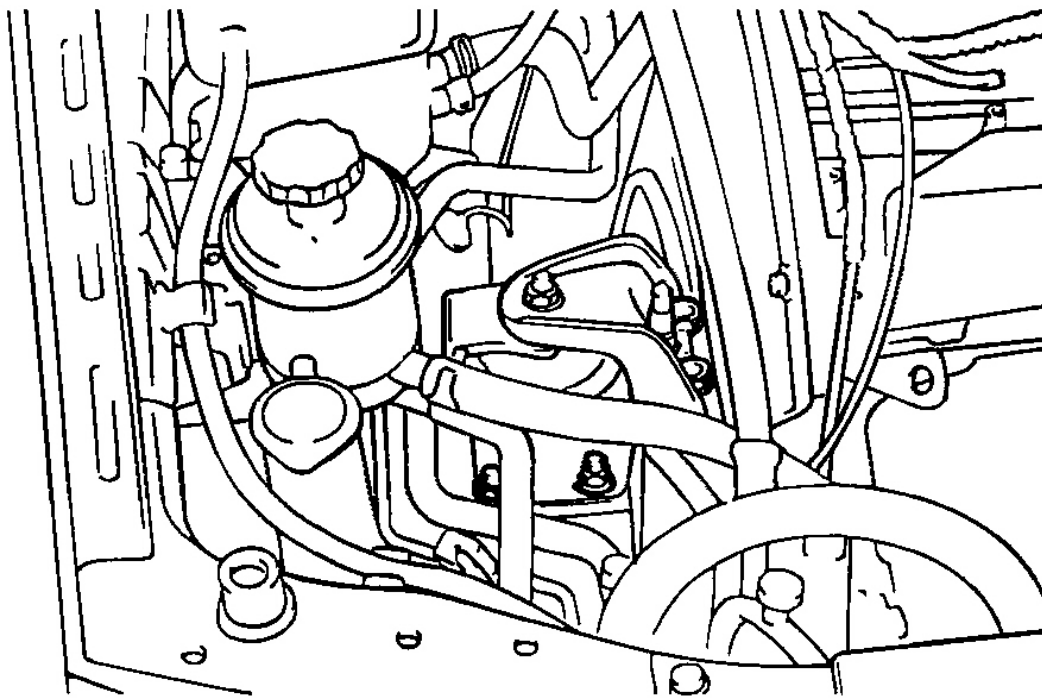


G00790006

Fig. 62: Identifying Engine Bracket
Courtesy of HYUNDAI MOTOR CO.

7. To install all of parts, follow the removal procedures in the reverse order.
8. Refill the coolant and then check for leaks.
9. Refill the transaxle oil and check for leaks, then test its operation.
10. Check the operation of the transaxle control cable and accelerator cable.
11. Check the proper operation of each gauge.

FRONT CASE

Components

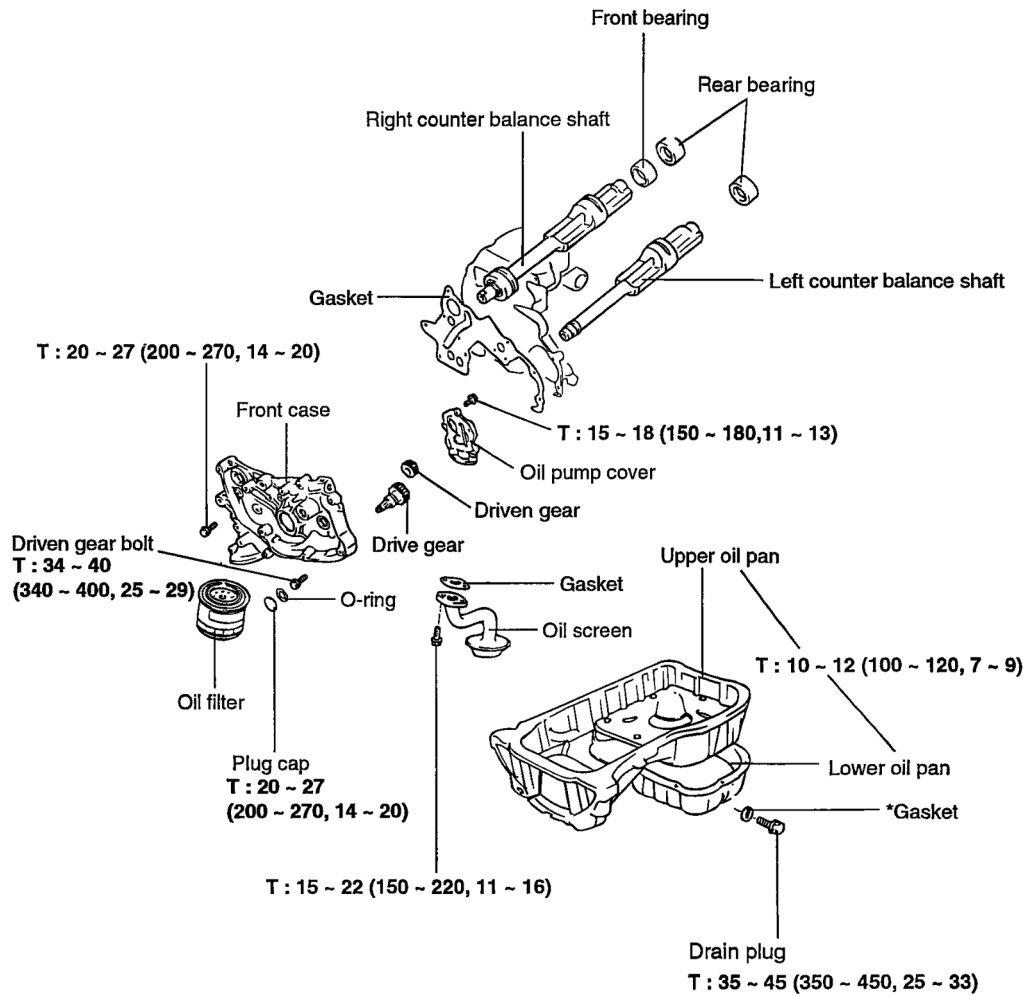

*Drain plug gasket should not be used again.

TORQUE : Nm (kg.cm, lb.ft)


G00790007

Fig. 63: Front Case Components
Courtesy of HYUNDAI MOTOR CO.

Disassembly

1. Remove the timing belt. Refer to **TIMING BELT**.
2. Remove all the oil pan bolts.
3. Tap the oil pan with a rubber hammer and remove the pan. (upper and lower parts)
4. Remove the oil screen and gasket.
5. Remove the front case assembly.


6. Remove the oil pressure switch.

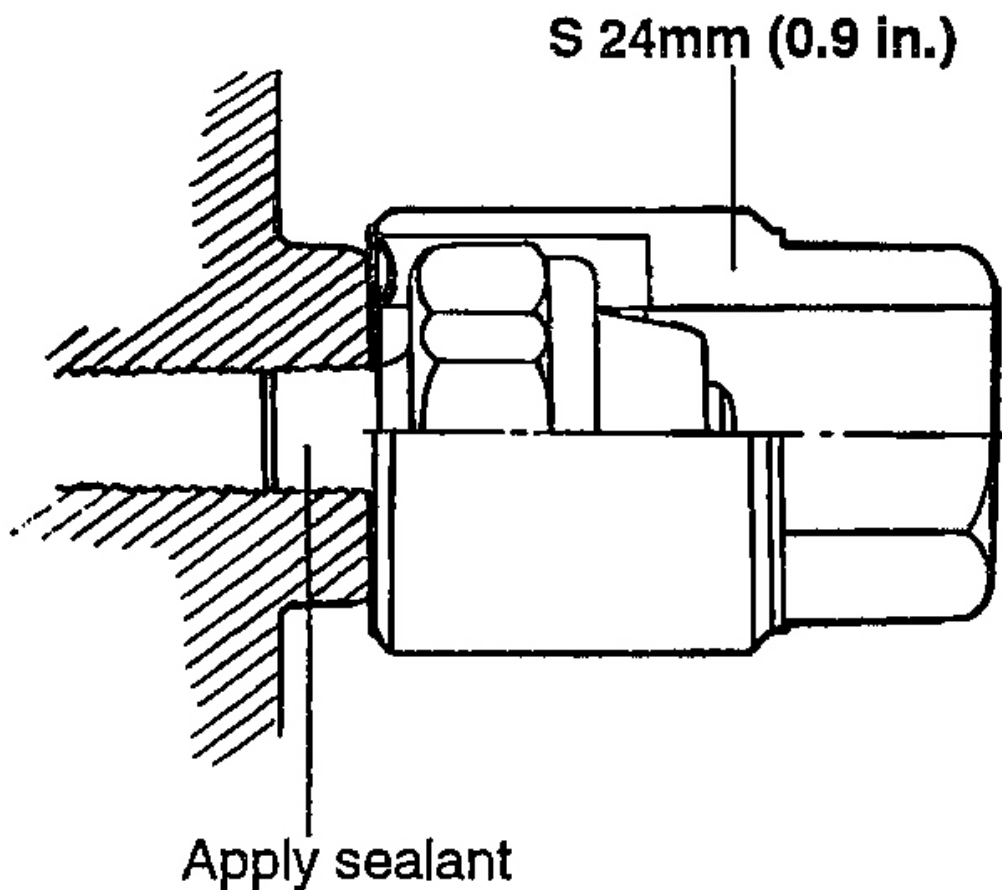

G00790008

Fig. 64: Removing Oil Pressure Switch
Courtesy of HYUNDAI MOTOR CO.

7. Remove the oil filter bracket and gasket.
8. Using the special tool (09213-33000) remove the plug cap from the oil pump portion of the front case.

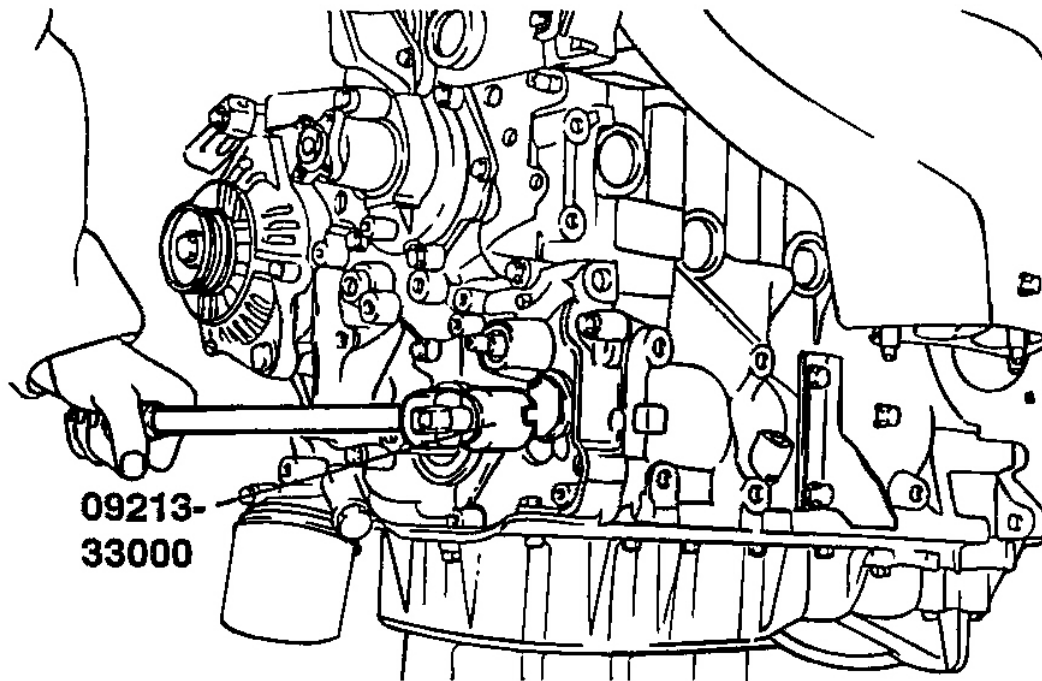


G00790009

Fig. 65: Removing Plug Cap

Courtesy of HYUNDAI MOTOR CO.


9. Remove the plug on the left side of the cylinder block and insert a screw driver with an 8 mm (0.32 in.) diameter into the plug hole. The screwdriver must be inserted more than 60 mm (2.4 in.)

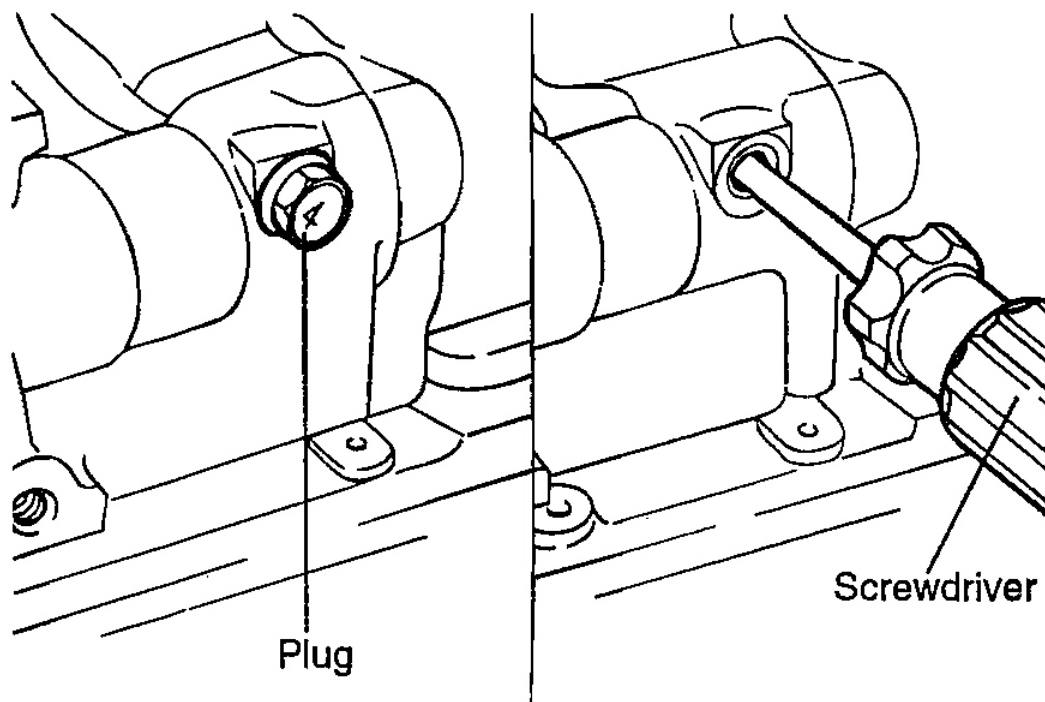

G00790010

Fig. 66: Identifying Plug On Left Side Of Motor
Courtesy of HYUNDAI MOTOR CO.


10. Remove the oil pump driven gear and the left counter balance shaft retaining bolt.

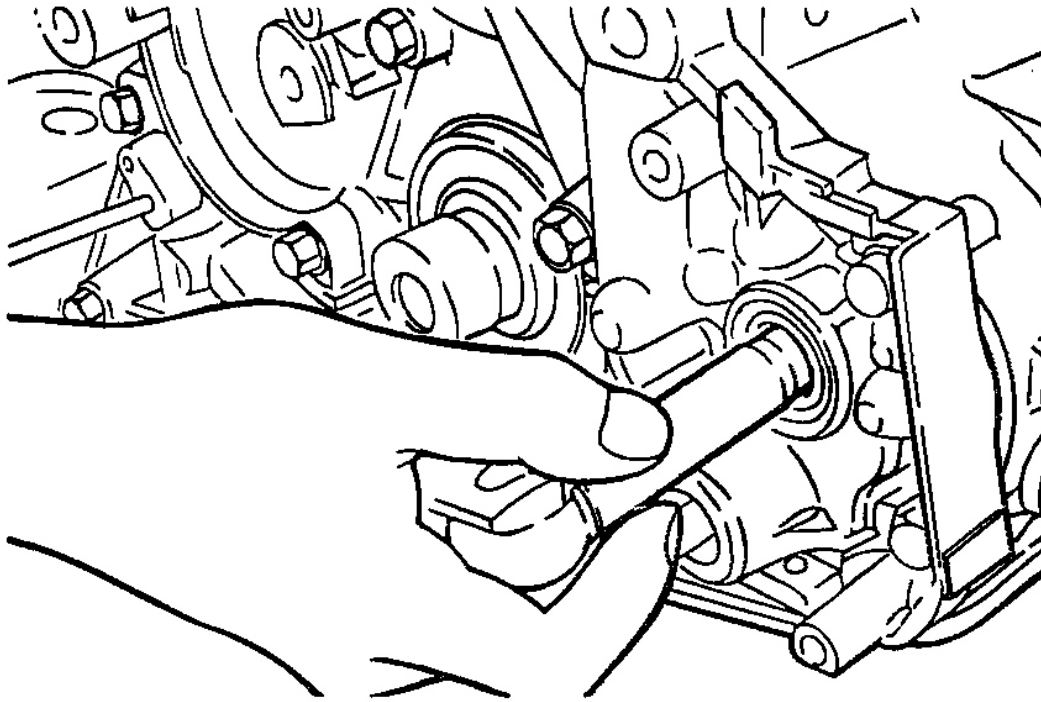

G00790011

Fig. 67: Removing Counter Balance Shaft Retaining Bolt
Courtesy of HYUNDAI MOTOR CO.


11. Remove the front case mounting bolts and remove the front case assembly and gasket and then remove the two counter balance shafts from the cylinder block.

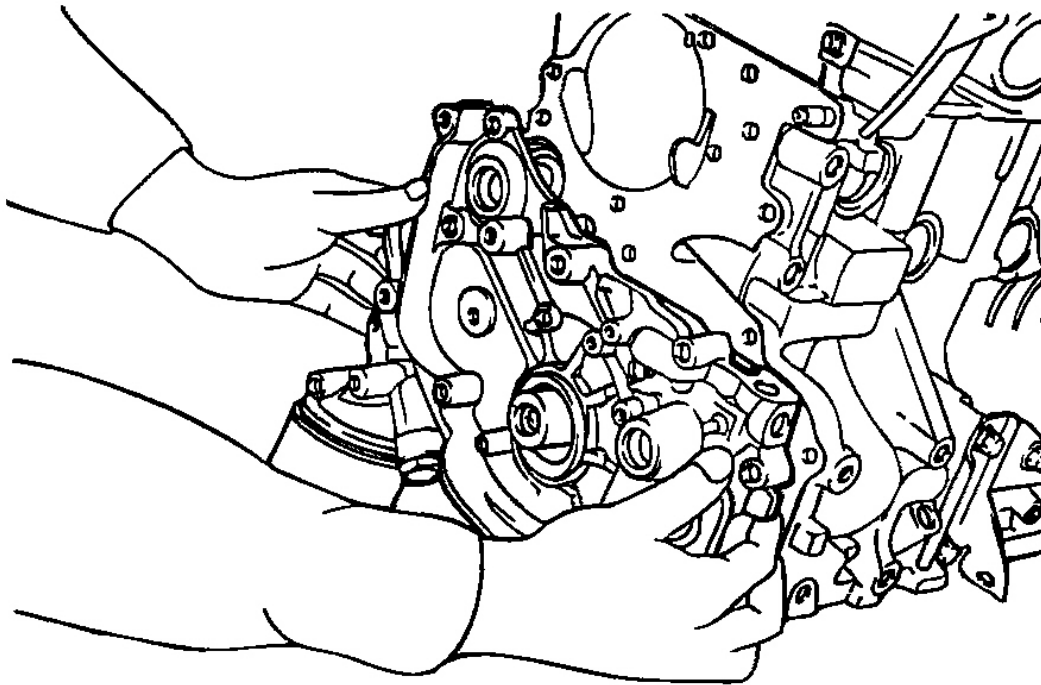

G00790012

Fig. 68: Removing Front Case
Courtesy of HYUNDAI MOTOR CO.

12. Remove the oil pump cover from the front case.
13. Remove the oil pump gears from the front case.

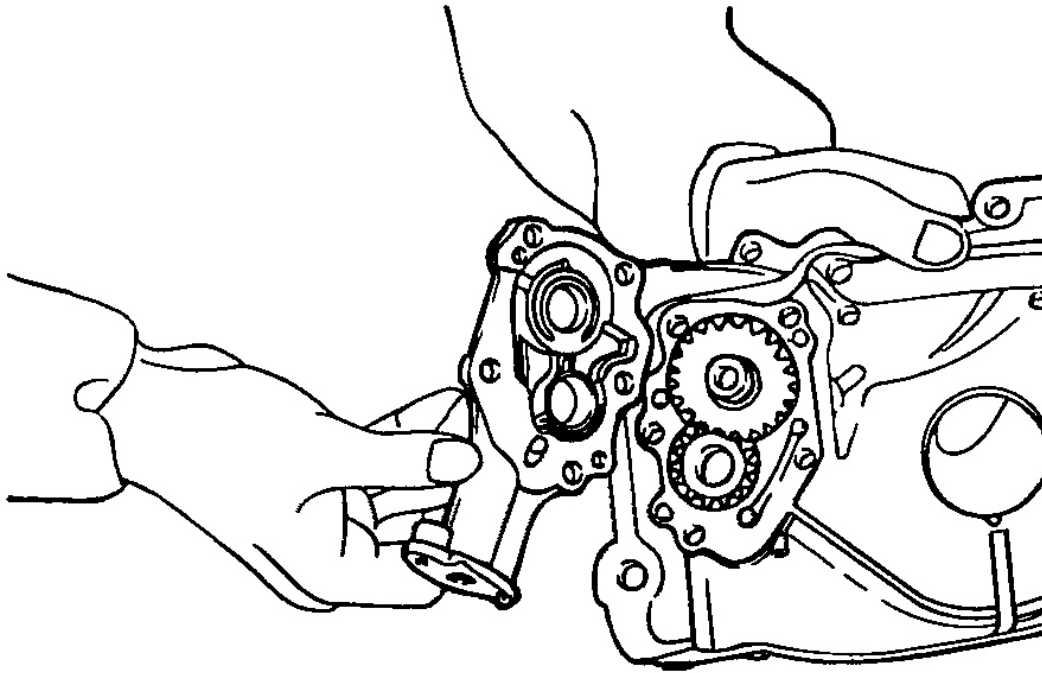

G00790013

Fig. 69: Identifying Oil Pump Gears
Courtesy of HYUNDAI MOTOR CO.

14. Remove the screw driver.

(Used in Step 9)

Inspection

1. Check all oil holes for clogging. Clean the holes if necessary.
2. Check the counter balance shaft front bearing for wear, damage and seizure. If there is anything wrong with the bearing, replace the front case.
3. Check the front case for cracks and other damage.
4. Replace a cracked or damaged front case.

Counter Balance Shaft

1. Check the journals for wear or seizure.
2. If excessive wear or seizure is evident, check the bearing carefully.
3. If necessary, replace the counter balance shaft bearing or the shaft itself.

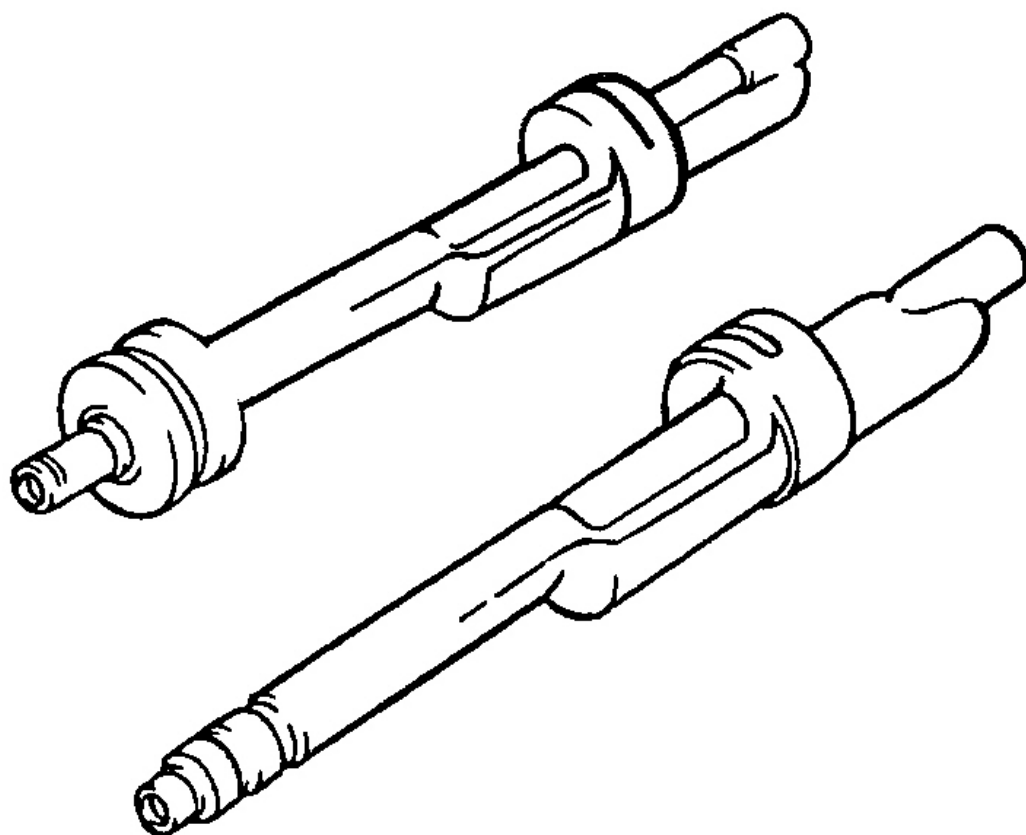
**G00790014**

Fig. 70: Identifying Counter Balance Shaft
Courtesy of HYUNDAI MOTOR CO.

Oil Seal

1. Check the oil seal lip for wear and damage. Replace the oil seal if necessary.
2. Check the oil seal lip for deterioration. Replace the oil seal if necessary.

Oil Pressure Switch

1. Check the continuity between the terminal and the body with an ohmmeter.

If there is no continuity, replace the oil pressure switch.


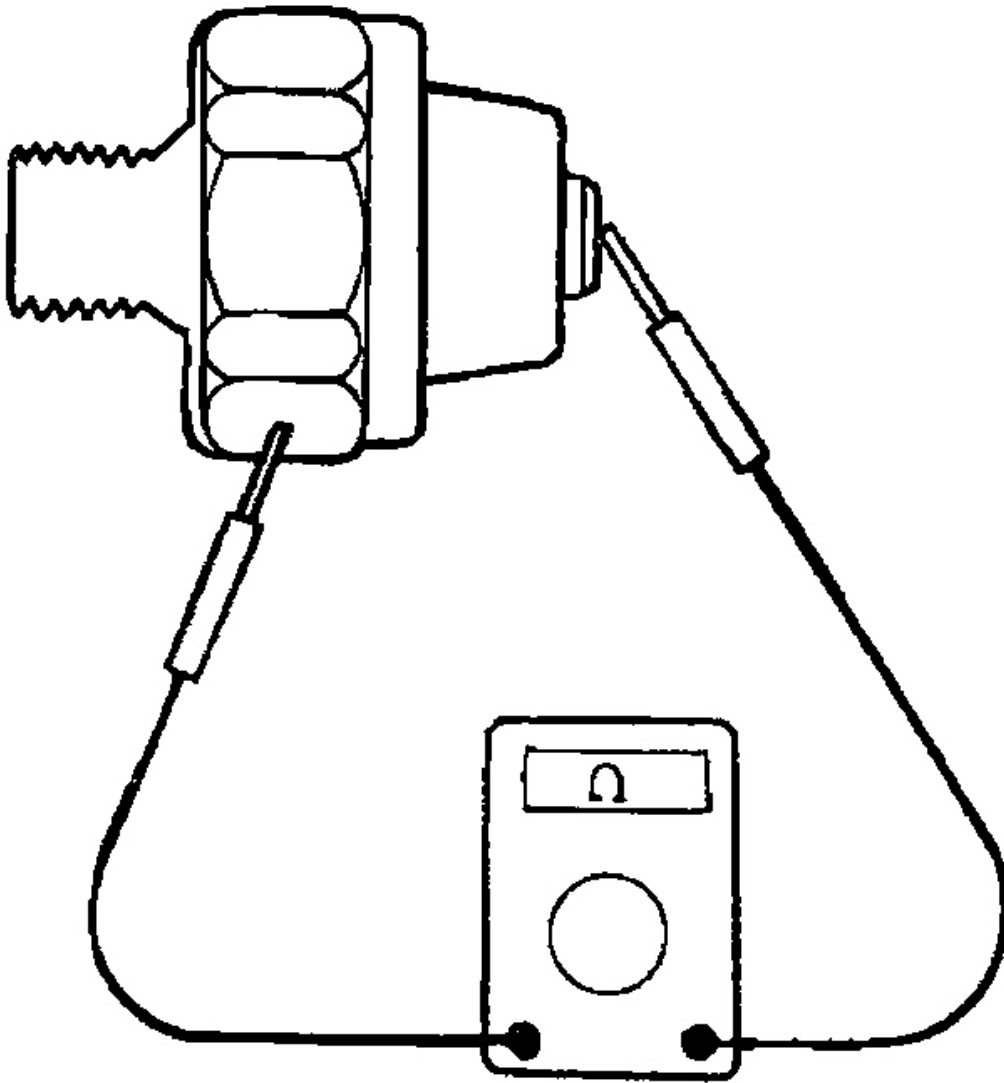
**G00790015**

Fig. 71: Checking Oil Pressure Switch Continuity
Courtesy of HYUNDAI MOTOR CO.

2. Check the continuity between the terminal and the body when the fine wire is pushed. If there is continuity even when the fine wire is pushed, replace the switch.
3. If there is no continuity when a 50 kPa (7 psi) vacuum is applied through the oil hole, the switch is operating properly. Check for an air leak. If air leaks, the diaphragm is broken. Replace the switch.

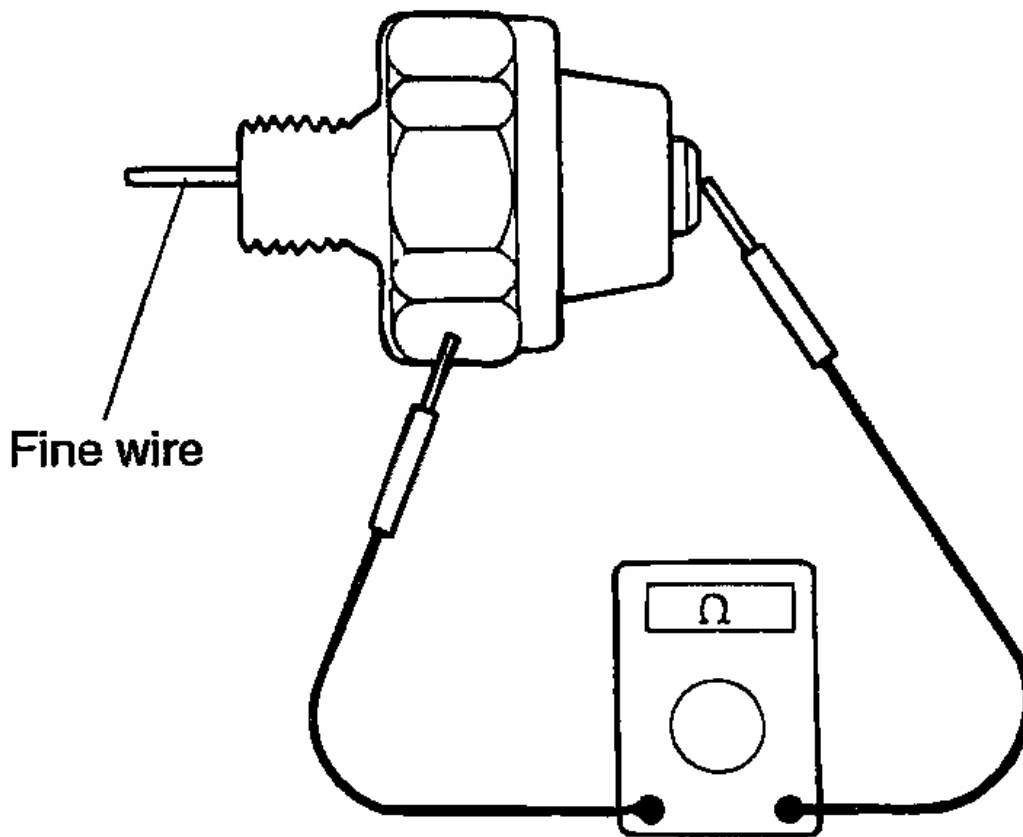

G00790016

Fig. 72: Checking Oil Pressure Switch Continuity With Fine Wire
 Courtesy of HYUNDAI MOTOR CO.

Oil Pump

1. Assemble the oil pump gear to the front case and rotate it to verify smooth rotation with no looseness.
2. Make sure that there is no ridge wear on the contact surface between the front case and the gear surface of the oil pump cover.
3. Install the drive and driven gears to the front case. Measure the tip clearance of the gears.

[Standard value]


Drive gear : 0.16 ~ 0.21 mm (0.0063 ~ 0.0083 in.)

Driven gear : 0.18 ~ 0.21 mm (0.0071 ~ 0.0083 in.)

[Limit]

Drive gear : 0.25 mm (0.0098 in)

Drive gear : 0.25 mm (0.0098 in.)

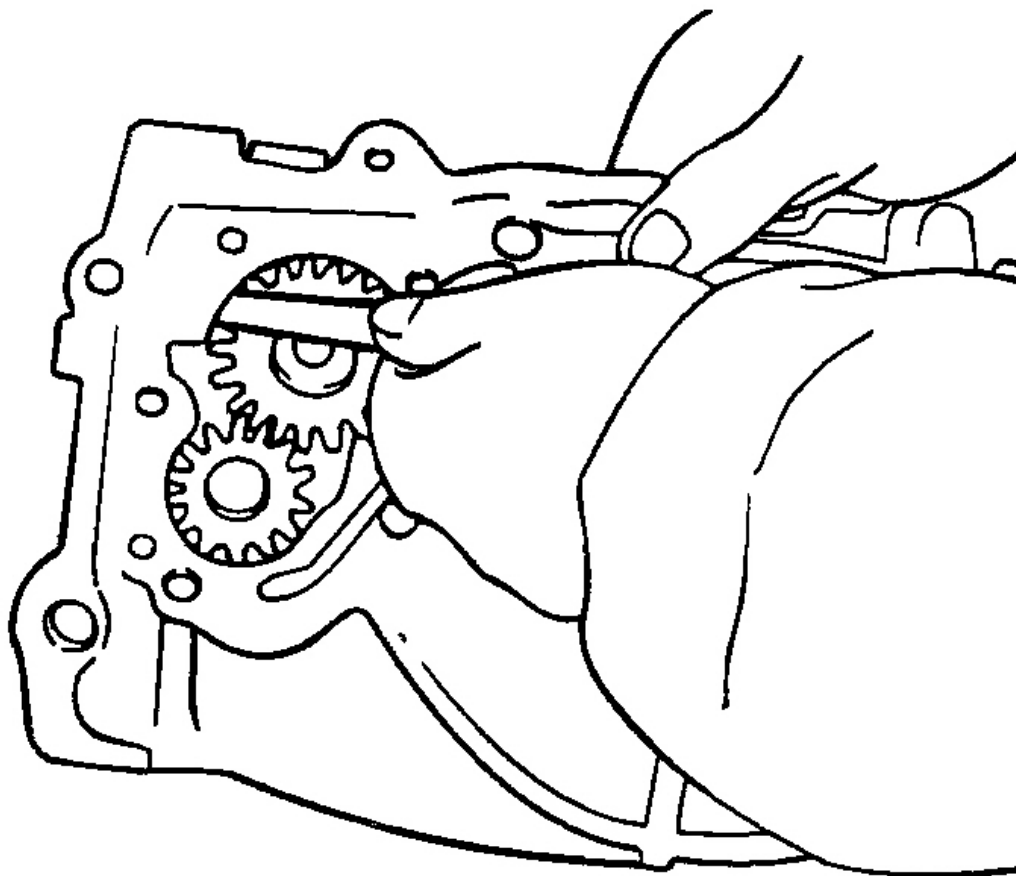

G00790017

Fig. 73: Measuring Tip Clearance Of Drive & Driven Gears
 Courtesy of HYUNDAI MOTOR CO.

4. Check the side clearance.

[Standard value]


Drive gear : 0.08 ~ 0.14 mm (0.0031 ~ 0.0055 in.)

Driven gear : 0.06 ~ 0.12 mm (0.0024 ~ 0.0047 in.)

[Limit]

Drive gear : 0.25 mm (0.0098 in)

Driven gear : 0.25 mm (0.0098 in.)

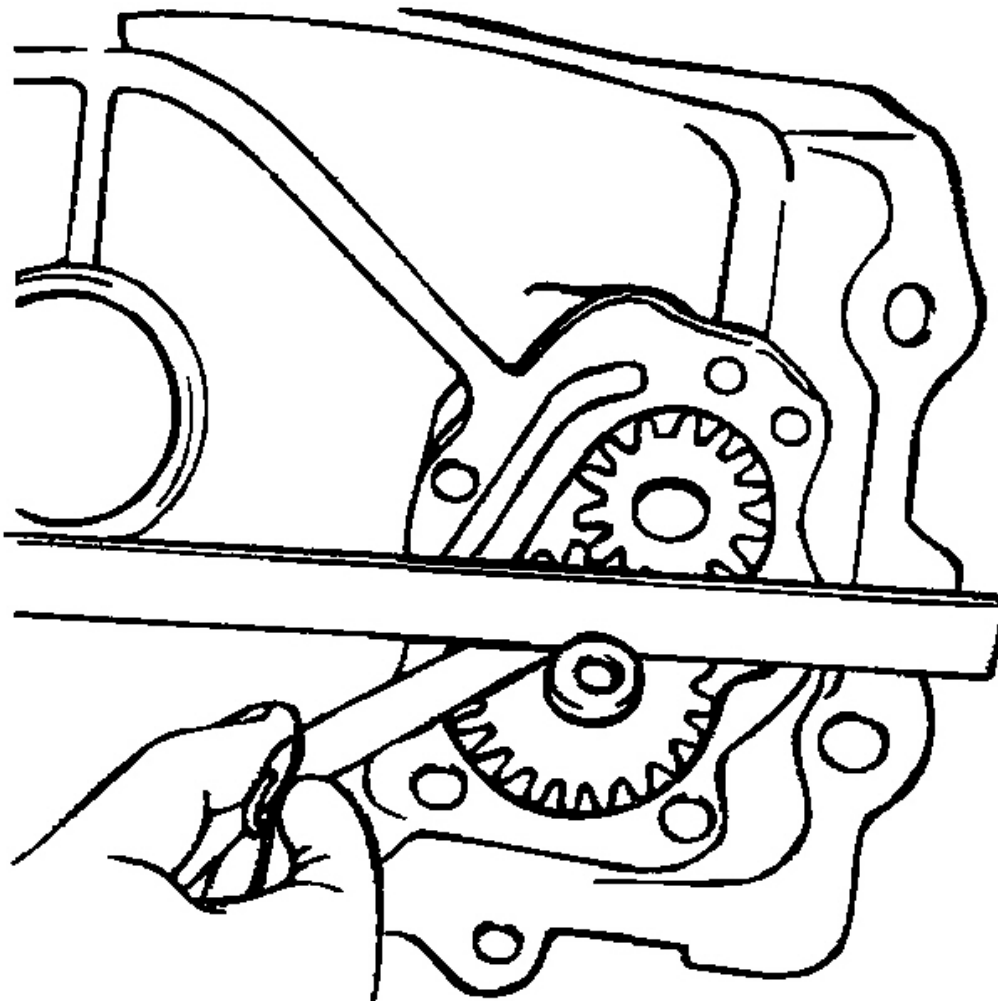


G00790018

Fig. 74: Checking Side Clearance
Courtesy of HYUNDAI MOTOR CO.

Counter Balance Shaft Bearing**Replacement**


1. Using a special tool, remove the front bearing of the right counter balance shaft from the cylinder block.

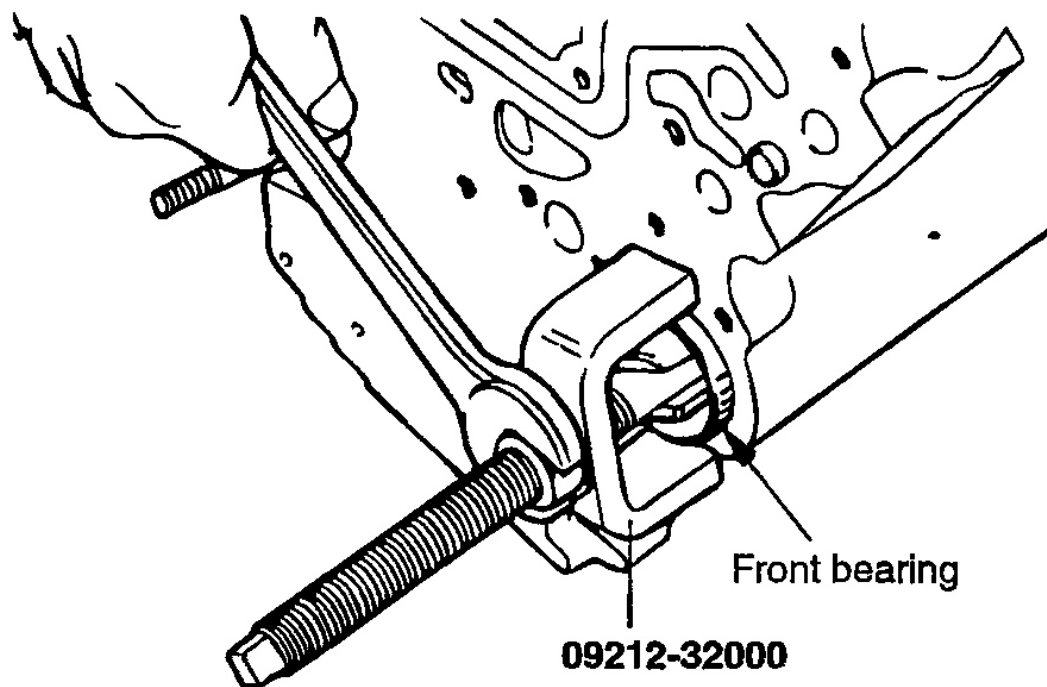

G00790019

Fig. 75: Removing Right Front Bearing
Courtesy of HYUNDAI MOTOR CO.


2. Using a special tool, remove the rear bearing of the right counter balance shaft from the cylinder block.

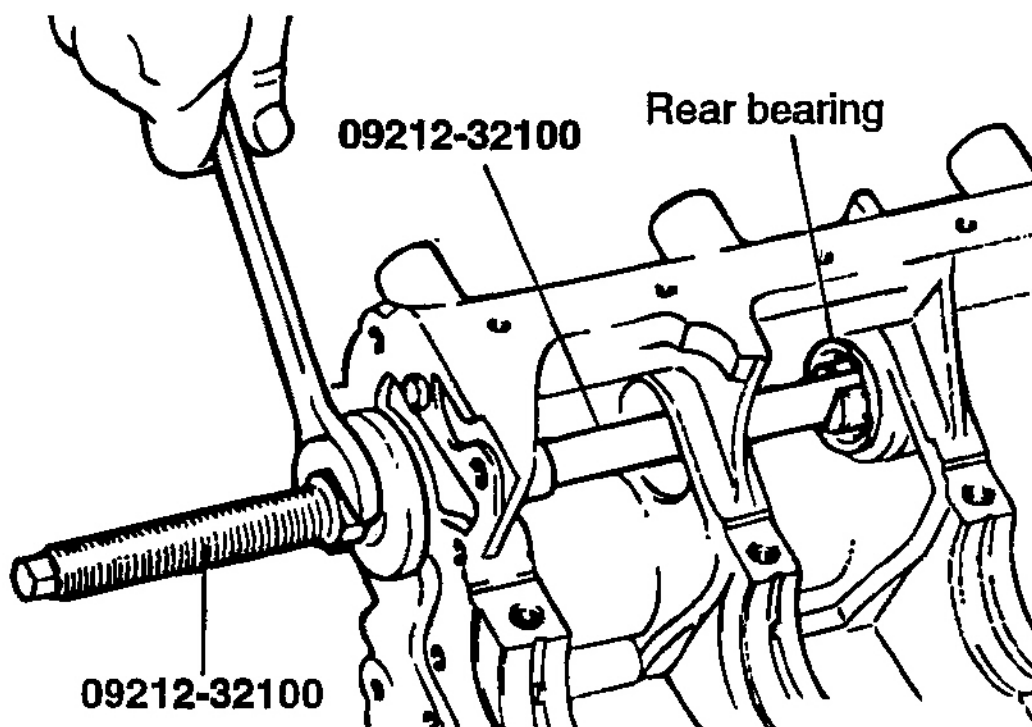

G00790020

Fig. 76: Removing Right Rear Bearing
Courtesy of HYUNDAI MOTOR CO.

3. Using a special tool, remove the rear bearing of the left counter balance shaft from the cylinder block. At this time, install a special tool on the front surface of cylinder block to hold the bearing puller.

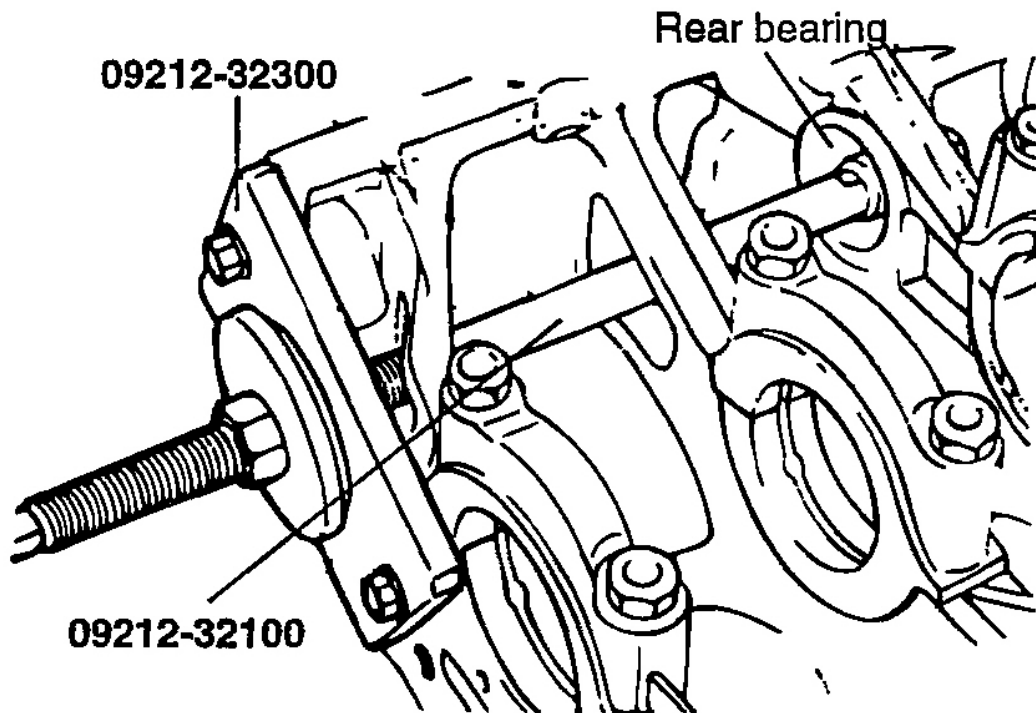


G00790021

Fig. 77: Removing Left Rear Bearing
Courtesy of HYUNDAI MOTOR CO.

4. Using a special tool, install the rear bearing of the left counter balance shaft to the cylinder block.

NOTE:

1. Apply engine oil to the outside of rear bearing and bearing hole in cylinder block.
2. The left rear bearing has no oil holes.

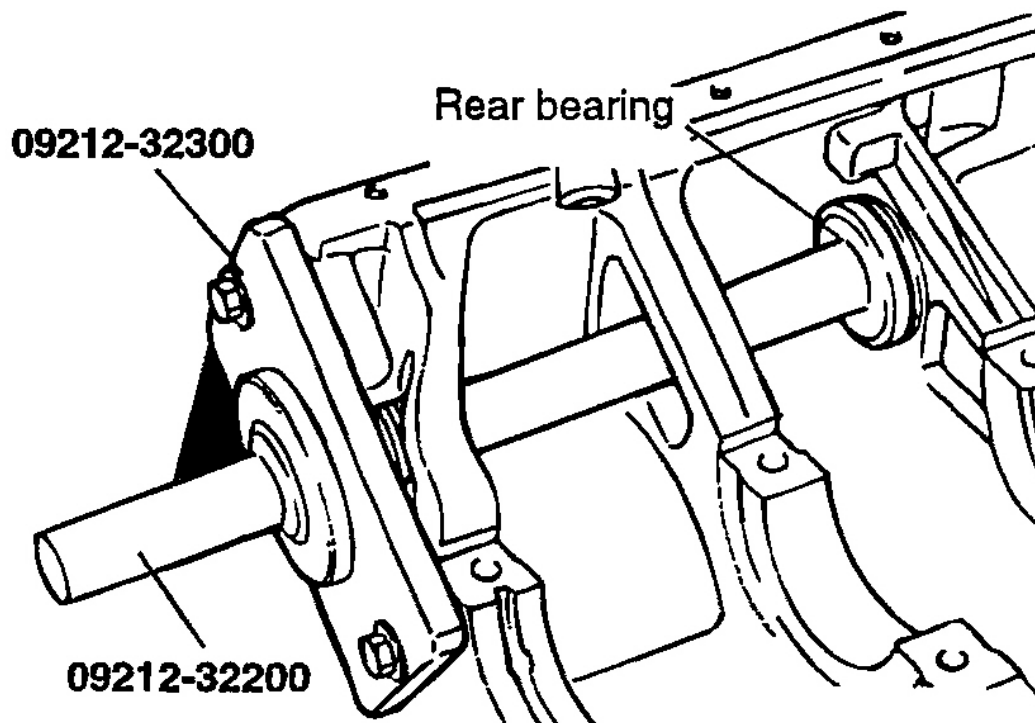

G00790022

Fig. 78: Installing Left Rear Bearing
Courtesy of HYUNDAI MOTOR CO.

5. Using a special tool, install the rear bearing of the right counter balance shaft to the cylinder block.

NOTE:

1. Apply engine oil to the outside surface of the bearing.
2. Make sure that the bearing oil hole is aligned with the oil hole of cylinder block.




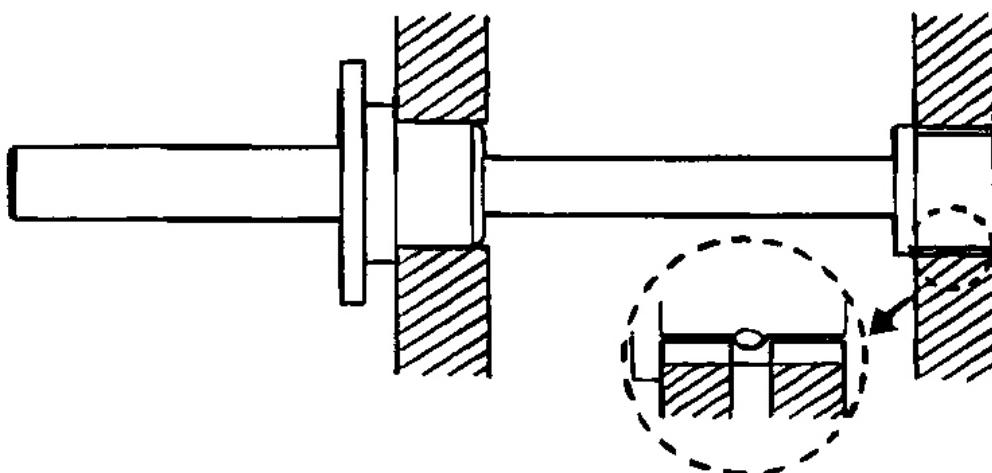


Fig. 79: Installing Right Rear Bearing
Courtesy of HYUNDAI MOTOR CO.


6. Using a special tool, install the front bearing of the right counter balance shaft to the cylinder block.

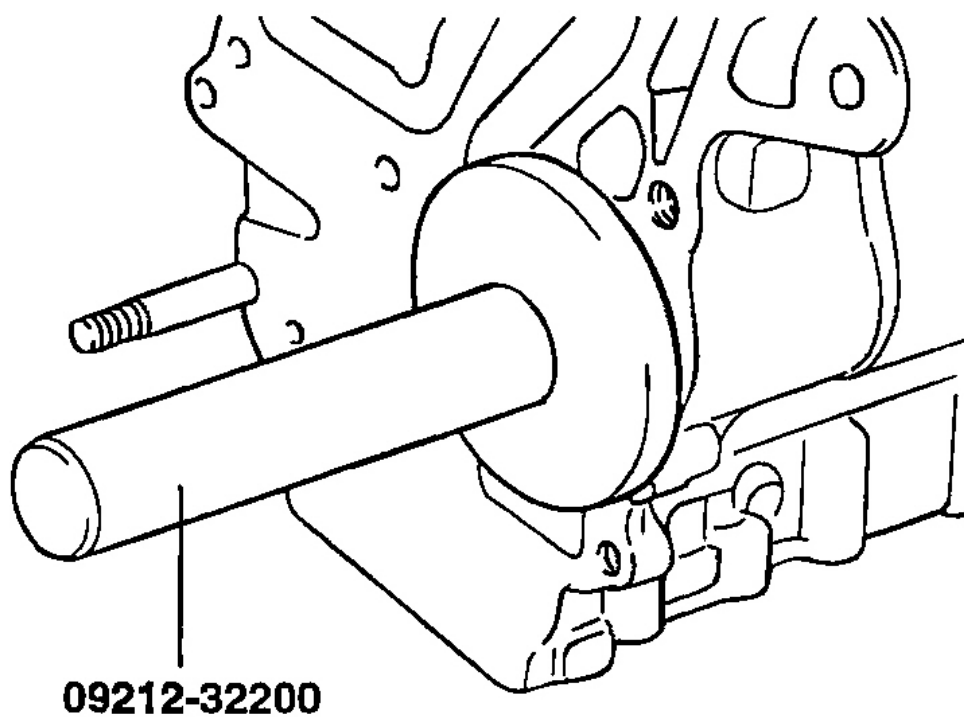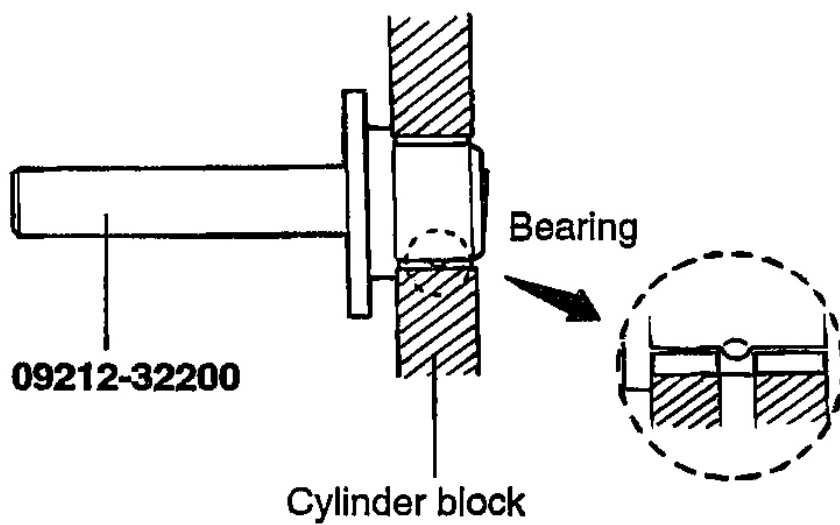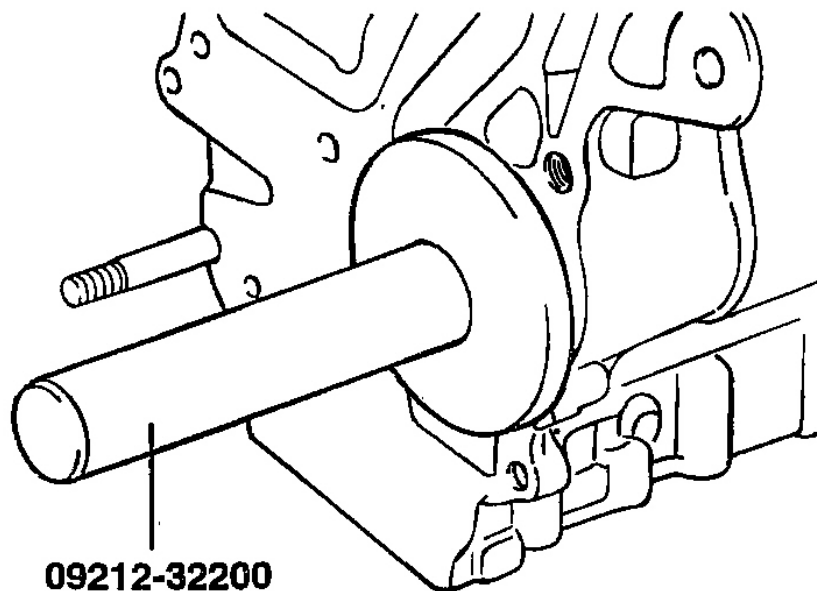

G00790024

Fig. 80: Installing Right Front Bearing
Courtesy of HYUNDAI MOTOR CO.

NOTE: Make sure that the bearing oil hole is aligned with the oil hole cylinder block.

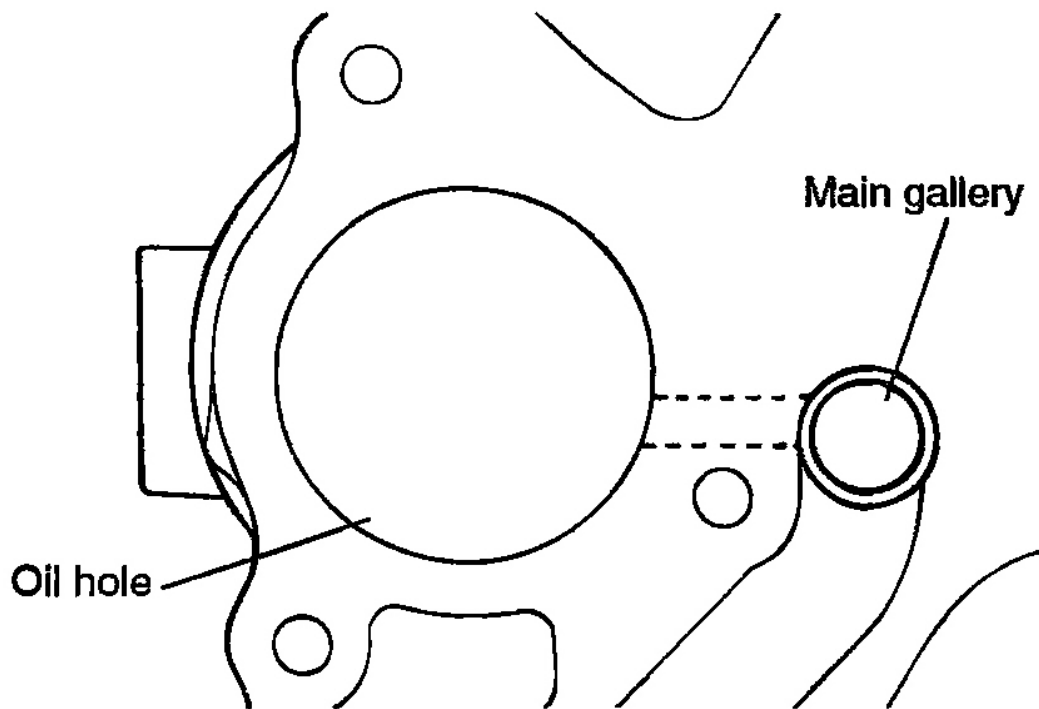


G00790025

Fig. 81: Identifying Oil Hole
Courtesy of HYUNDAI MOTOR CO.

Reassembly

1. Apply engine oil to the gear and align the two timing marks.

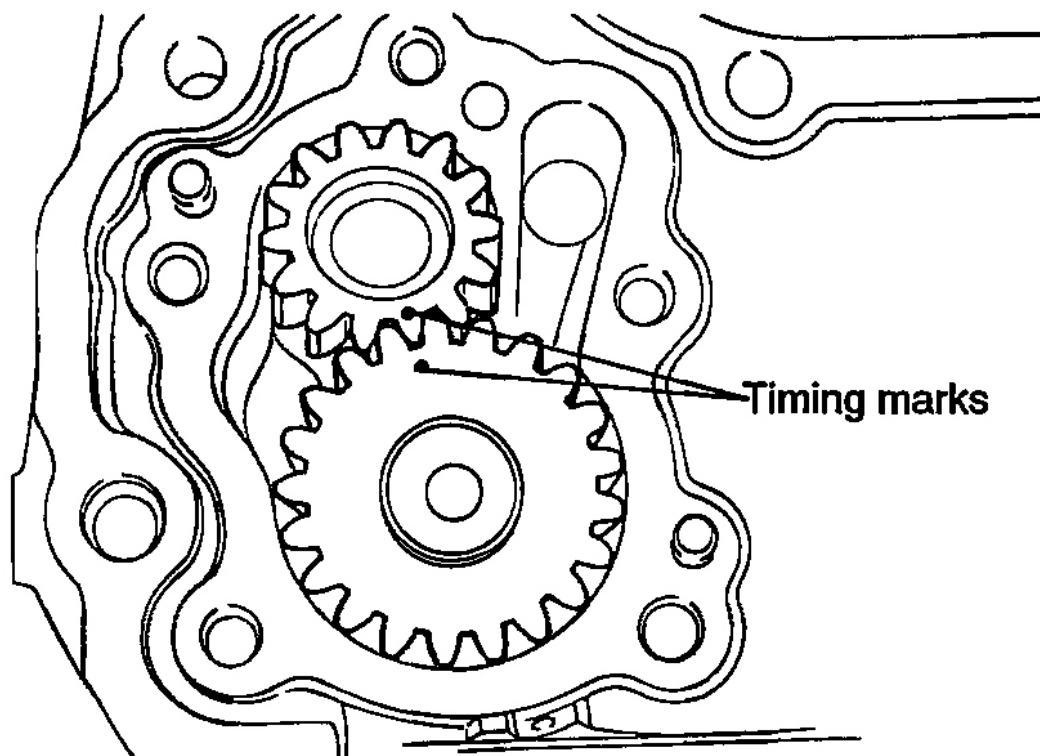

G00790026

Fig. 82: Identifying Timing Marks
Courtesy of HYUNDAI MOTOR CO.

2. Using the special tool, the crankshaft front oil seal installer (09214-32000), install the crankshaft front oil seal into the front case.

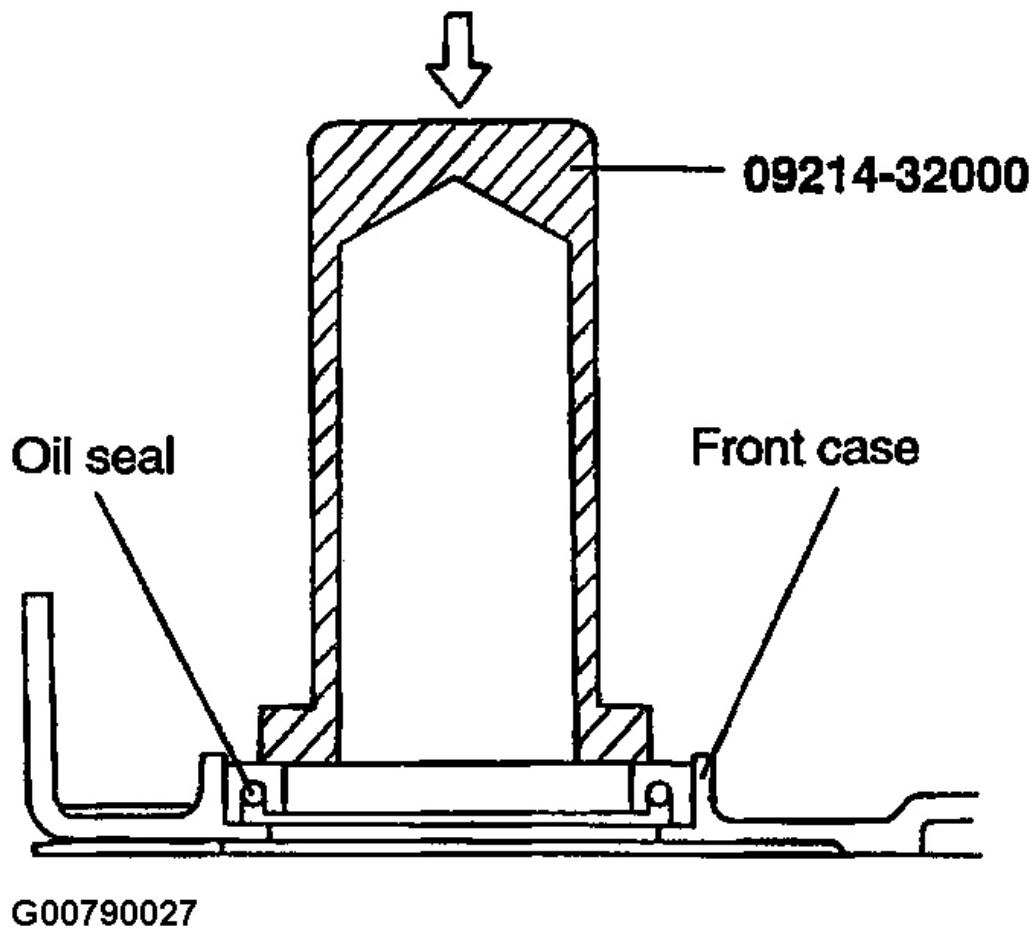


Fig. 83: Installing Front Crankshaft Oil Seal
Courtesy of HYUNDAI MOTOR CO.

3. Set the special tool (09214-32100) on the front end of the crankshaft and apply a thin coat of engine oil to the outer circumference of the special tool to install the front case.


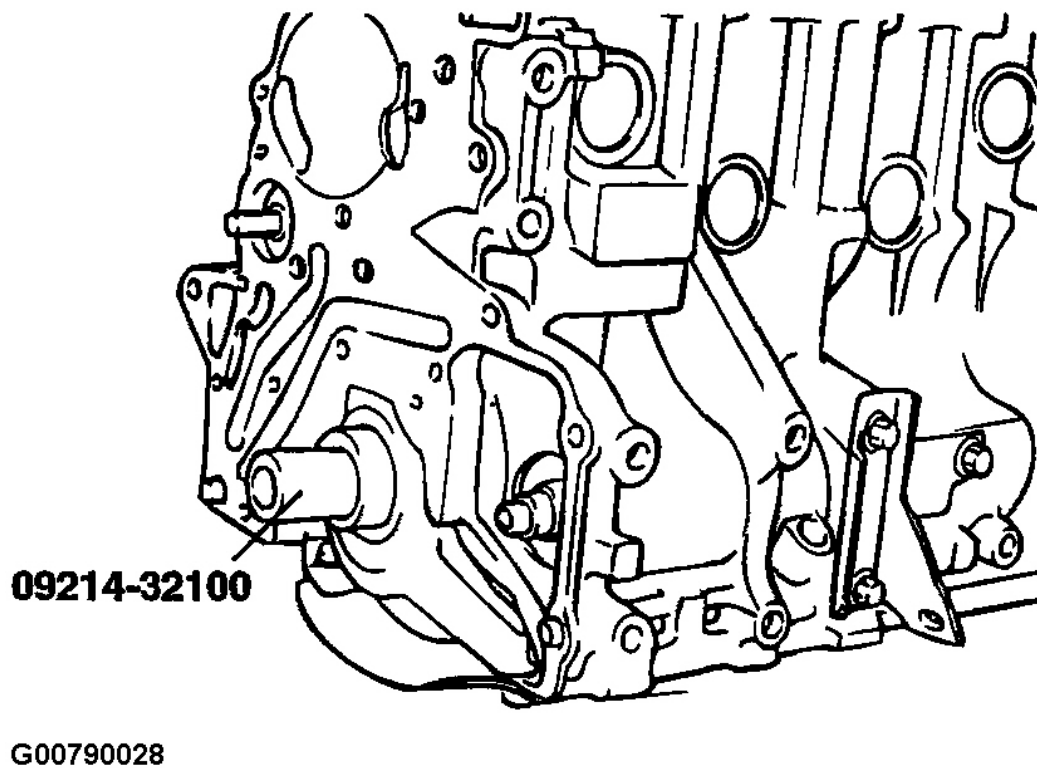


Fig. 84: Identifying Special Tool
Courtesy of HYUNDAI MOTOR CO.

4. Install a new front case gasket to the front case assembly and tighten the flange bolts temporarily.

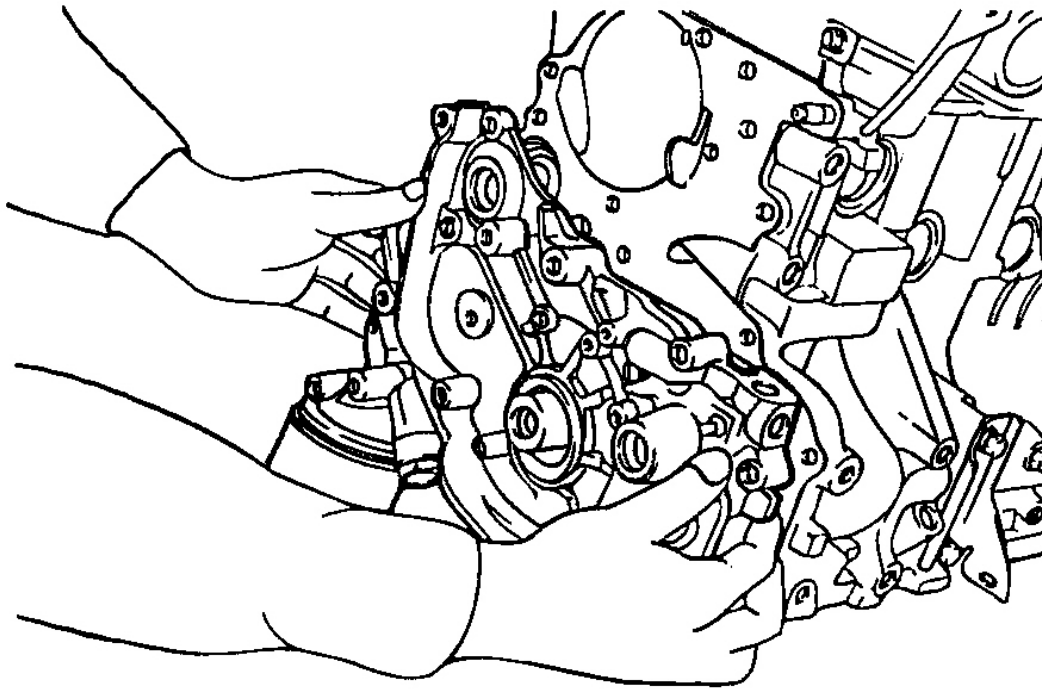

G00790029


Fig. 85: Installing Front Case
Courtesy of HYUNDAI MOTOR CO.

5. Install the front case assembly with a new gasket. Tighten bolts to the specified torque.

Front case assembly

Tightening torque :


20 ~ 27 Nm (200 ~ 270 kg.cm, 14 ~ 20 lb.ft)

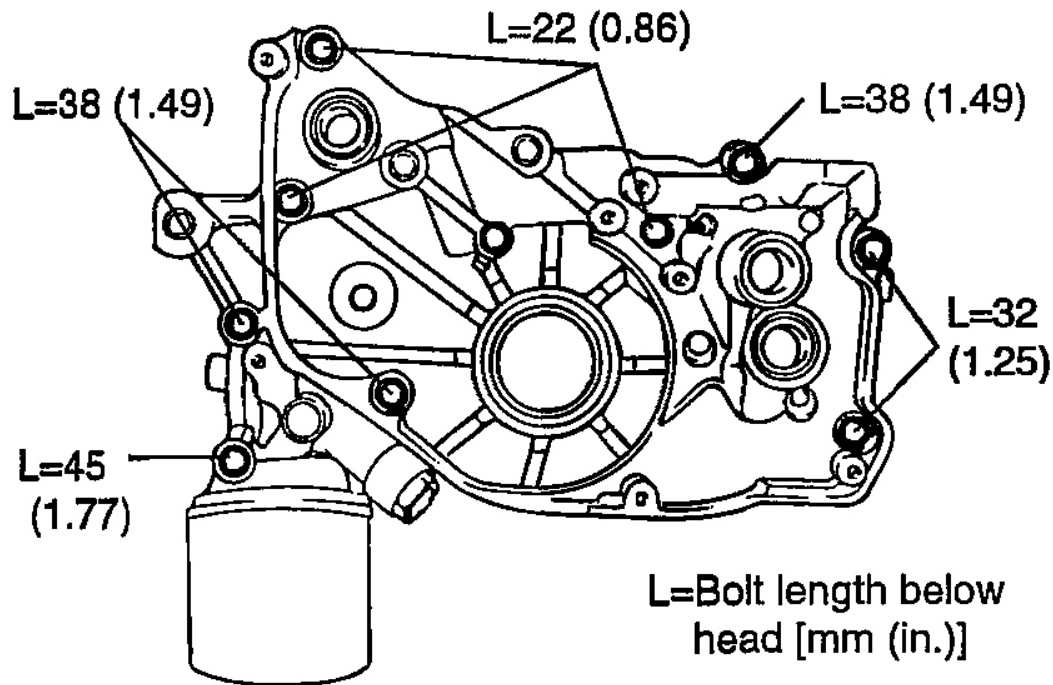

G00790030

Fig. 86: Identifying Front Case Bolts
Courtesy of HYUNDAI MOTOR CO.


6. Insert a screw driver into the plug hole in left side of cylinder block. After verifying that the shaft is in the proper position, replace the bolt and tighten it.

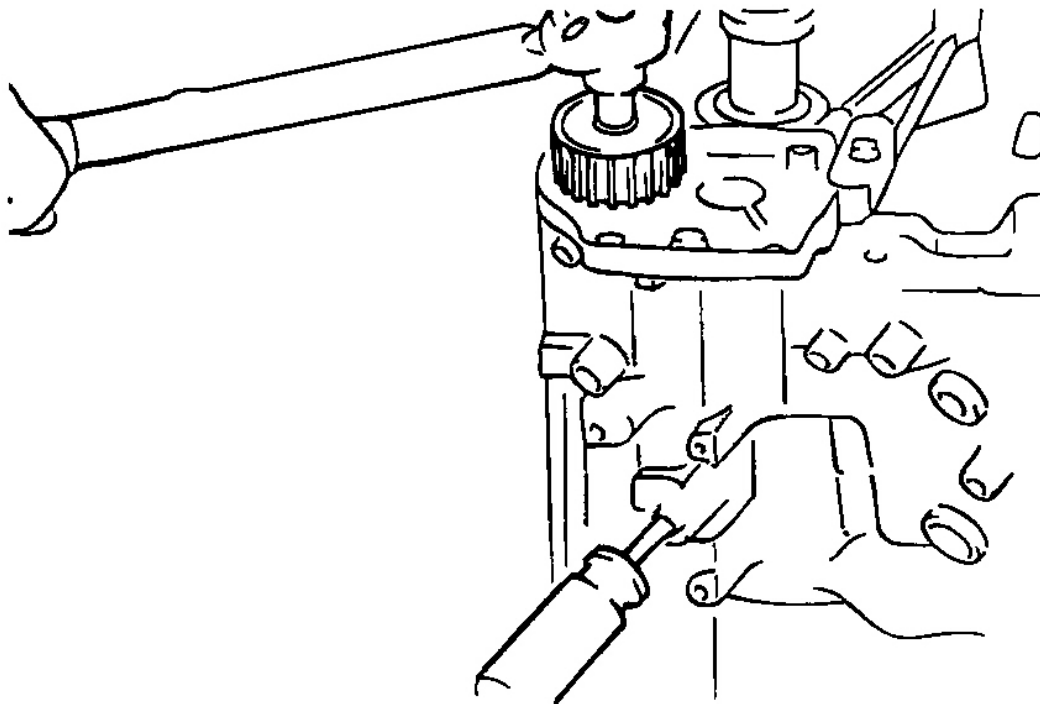

G00790031

Fig. 87: Verifying Shaft Position
Courtesy of HYUNDAI MOTOR CO.

7. Install a new O-ring to the groove of the front case.
8. Using a special tool, install the plug case and tighten it to the specified torque.

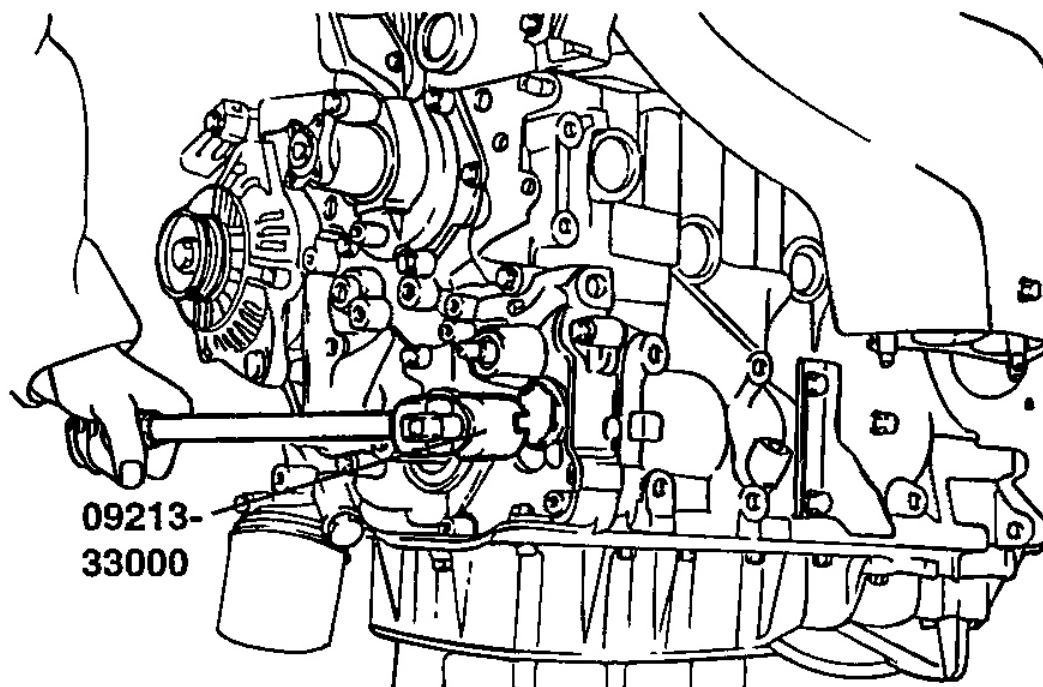

G00790032

Fig. 88: Installing Plug Case

Courtesy of HYUNDAI MOTOR CO.


Plug cap

Tightening torque : 20 ~ 27 Nm (200 ~ 270 kg.cm, 14 ~ 20 lb.ft)

9. Apply sealant to the groove of the pan flange as shown.

NOTE:

1. Apply sealant approximately 4 mm (0.16 in.) in thickness.
2. After the application of the sealant, install the oil pan within 15 minutes.

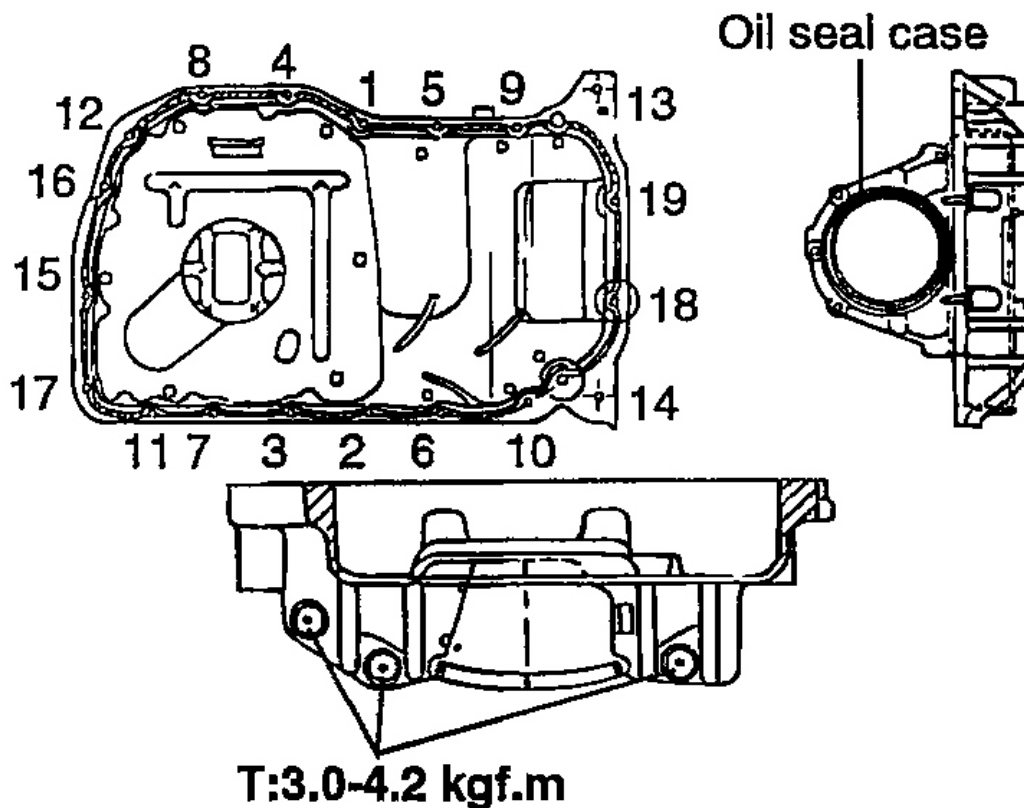

G00790033

Fig. 89: Oil Pan Bolt Tightening Sequence
 Courtesy of HYUNDAI MOTOR CO.

10. Note the difference in bolt lengths at the locations shown.

Install the upper and lower oil pans and tighten the bolts to the specified torque.

Tightening torque

Oil pan bolt : 10 ~ 12 Nm (100 ~ 120 kg.cm, 7 ~ 9 lb.ft)

11. Using a 24 mm deep socket, install the oil pressure switch after applying sealant to the threaded area.


Sealant : Threebond 1104 or equivalent

NOTE: Do not torque the oil pressure switch excessively.

Tightening torque

Oil pressure switch :

8 ~ 12 Nm (80 ~ 120 kg.cm, 6 ~ 9 lb.ft)

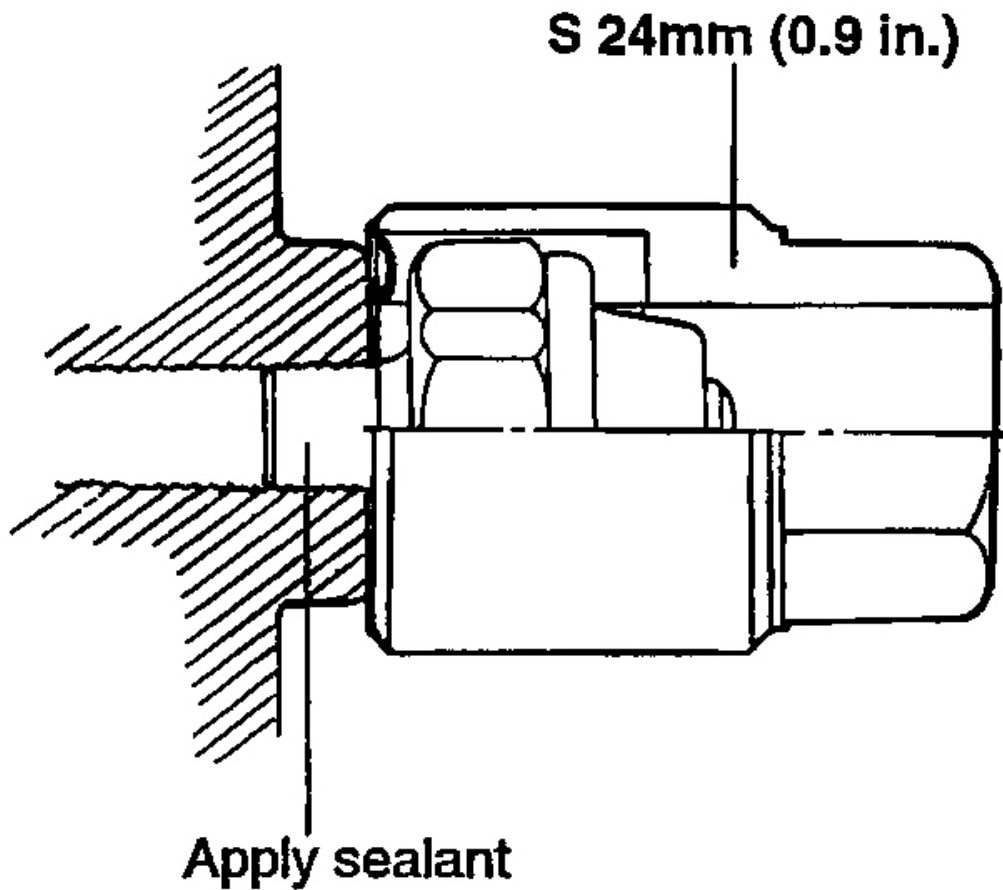


G00790034

Fig. 90: Installing Oil Pressure Switch
Courtesy of HYUNDAI MOTOR CO.

MAIN MOVING SYSTEM

CAMSHAFT

Components

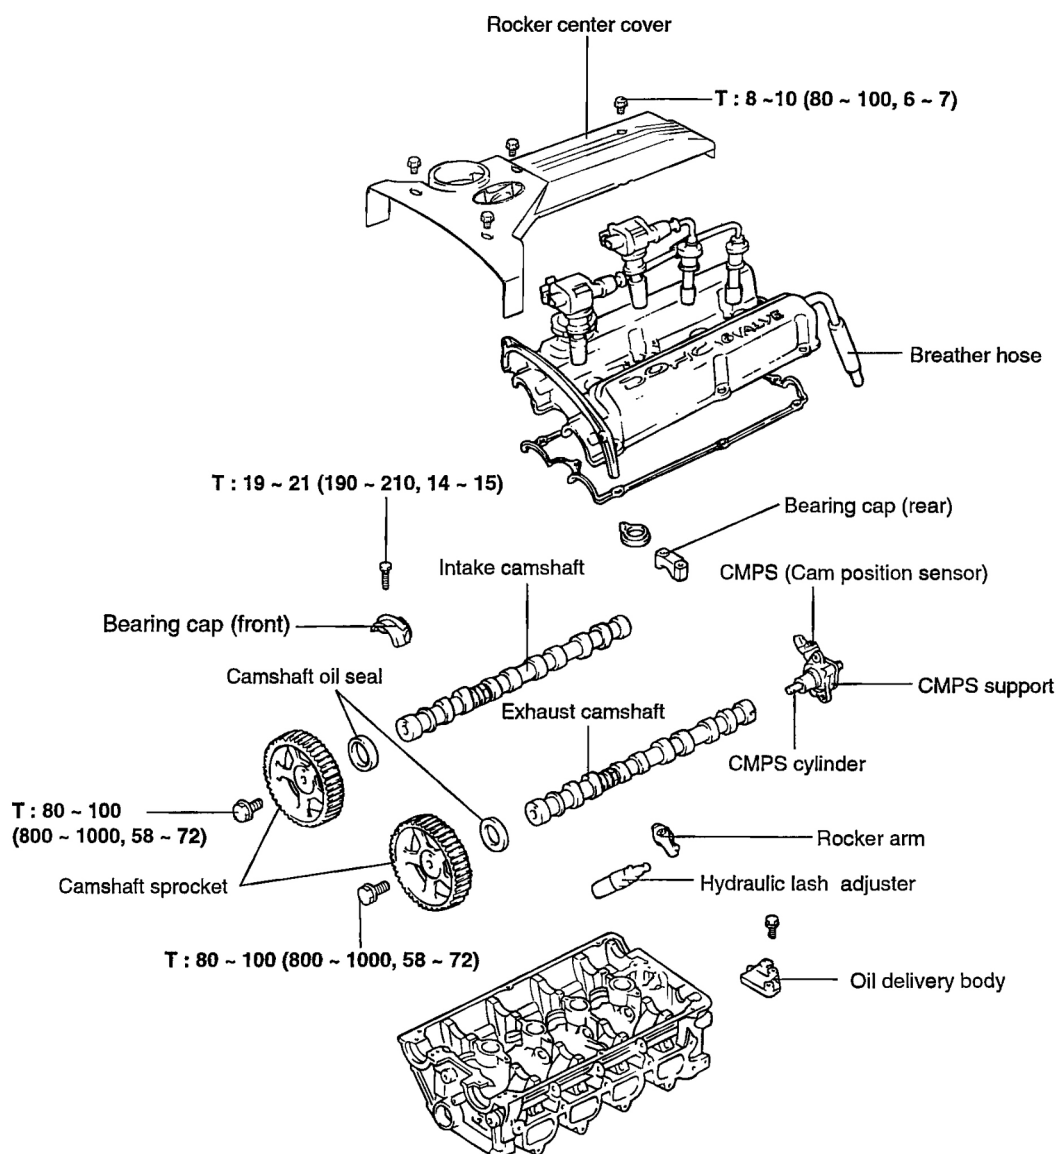

TORQUE : Nm (kg.cm, lb.ft)

G00790035


Fig. 91: Camshaft Components
Courtesy of HYUNDAI MOTOR CO.

Disassembly

1. Disconnect the negative terminal from the battery.
2. Drain the engine coolant.
3. Remove the breather hose between the air cleaner and the rocker cover.
4. Remove the air cleaner.

5. Remove the timing belt cover.
6. Remove the rocker cover and camshaft position sensor.
7. Loosen the camshaft sprocket bolts then remove the camshaft sprockets.
8. Loosen the camshaft bearing cap bolts and remove the bearing caps, camshafts, rocker arms and lash adjusters.

CAUTION: Loosen the cap bolts in increments to avoid bending the camshafts.

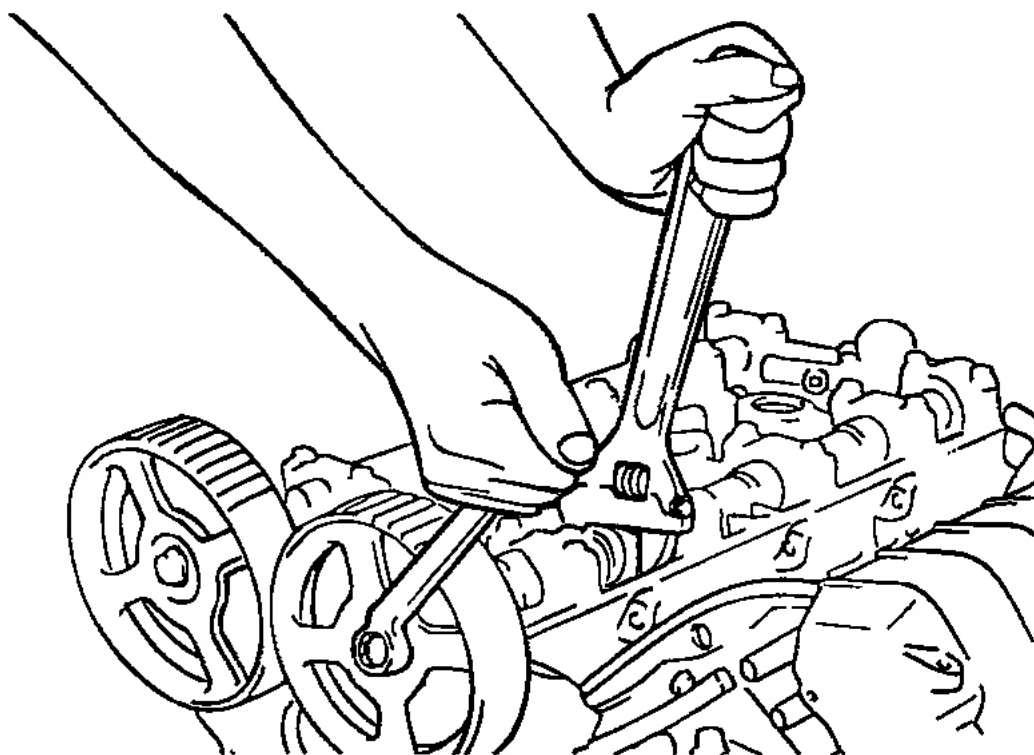

G00790036


Fig. 92: Loosening Camshaft Sprocket Bolt
Courtesy of HYUNDAI MOTOR CO.

Inspection

Rocker Arms

1. Check rotation of the roller. If they do not rotate smoothly or are loose, replace them.
2. Check the roller surface. Replace if there is any dent, damage or evidence of seizure.

3. Check the valve contact surface for possible damage or evidence of seizure. Replace if necessary.

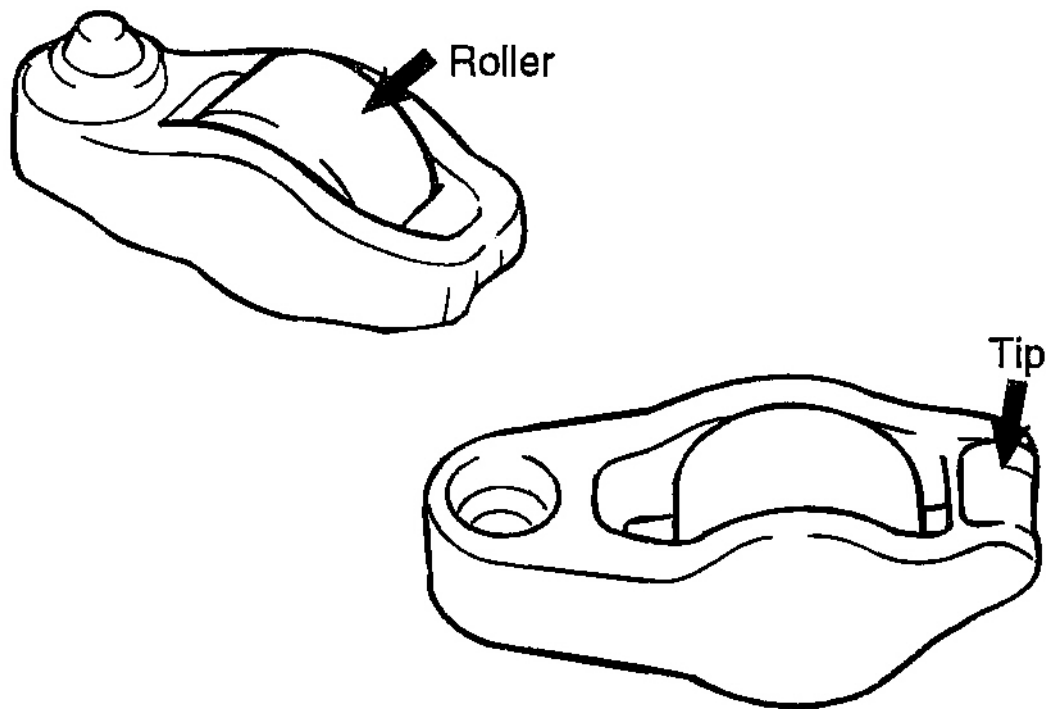

G00790037

Fig. 93: Identifying Rocker Arms
Courtesy of HYUNDAI MOTOR CO.

CAMSHAFTS

1. Check the camshaft journals for wear. If the journals are badly worn, replace the camshaft.
2. Check the cam lobes for damage. If the lobe is damaged or worn excessively, replace the camshaft.

Cam height

[Standard]

Intake : 35.493 mm (1.3974 in.)

Exhaust : 35.317 mm (1.3904)

[Limit]

Intake : 34.993 mm (1.3776 in.)

Exhaust : 34.817 mm (1.3707 in.)

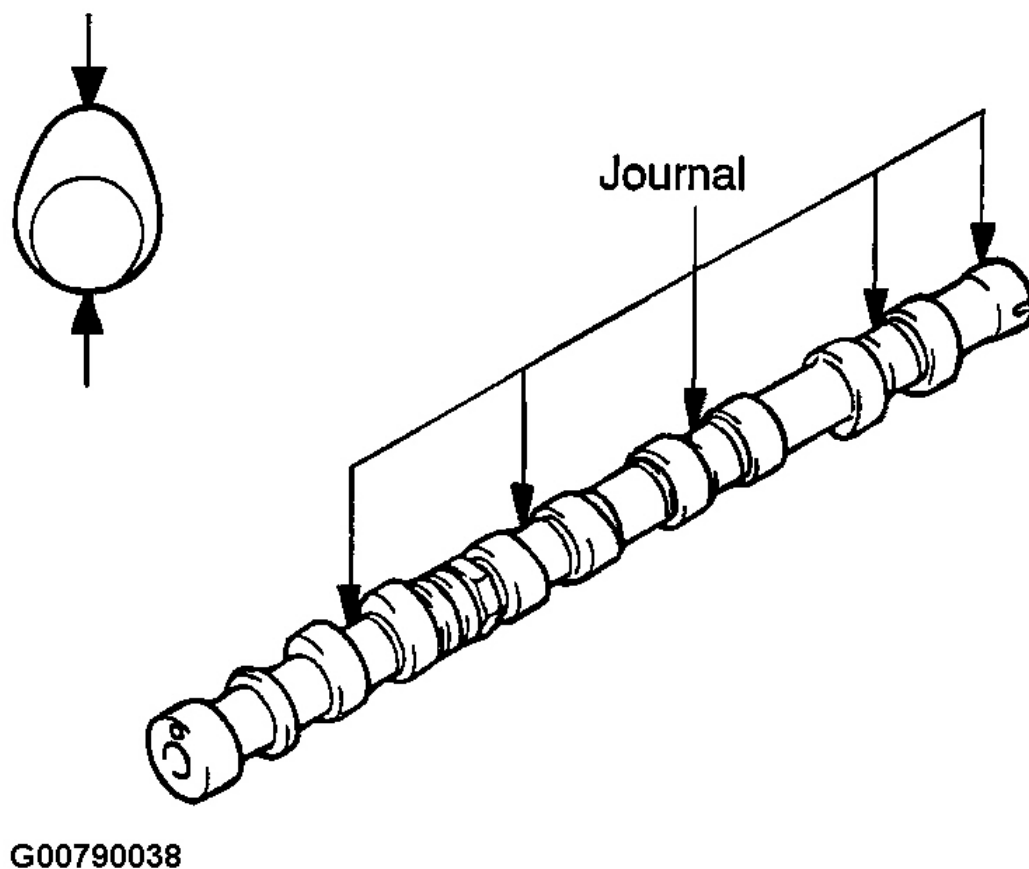


Fig. 94: Identifying Camshaft Journals & Lobes
Courtesy of HYUNDAI MOTOR CO.

Reassembly

1. Install the camshafts on the cylinder head. Do not install the rocker arms yet.

NOTE:

1. Apply engine oil to journals and cams of the camshafts.
2. The exhaust camshaft has a slit on its rear end for the crankshaft position sensor.

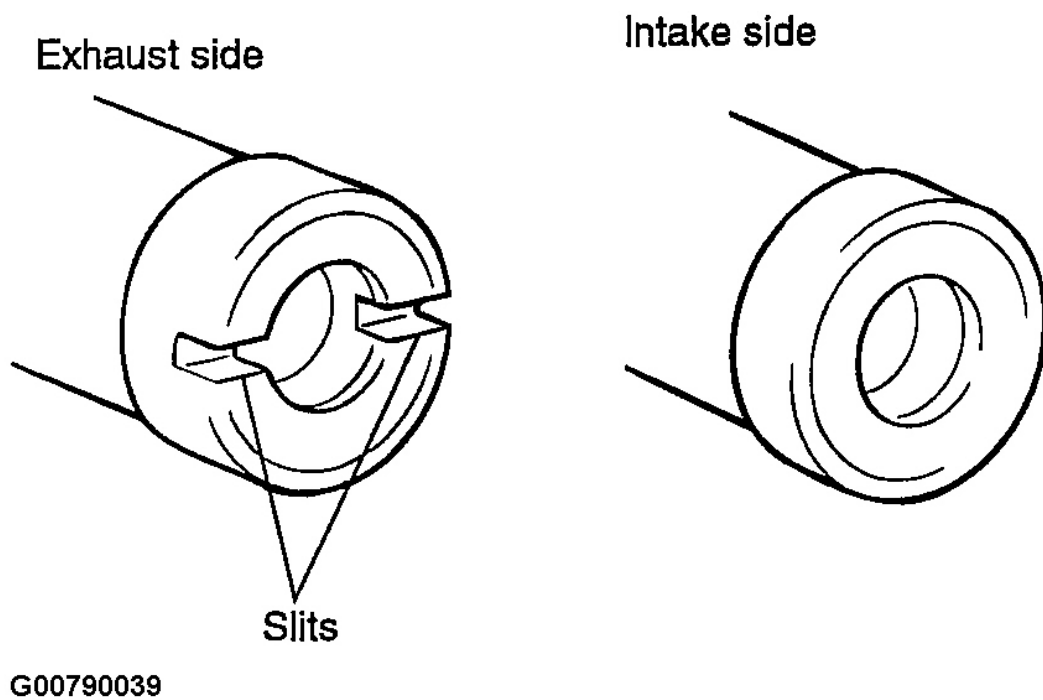


Fig. 95: Identifying Camshafts
Courtesy of HYUNDAI MOTOR CO.

2. Install the bearing caps. The markings on the caps are for intake/exhaust identification.

I : Intake camshaft. E : Exhaust camshaft


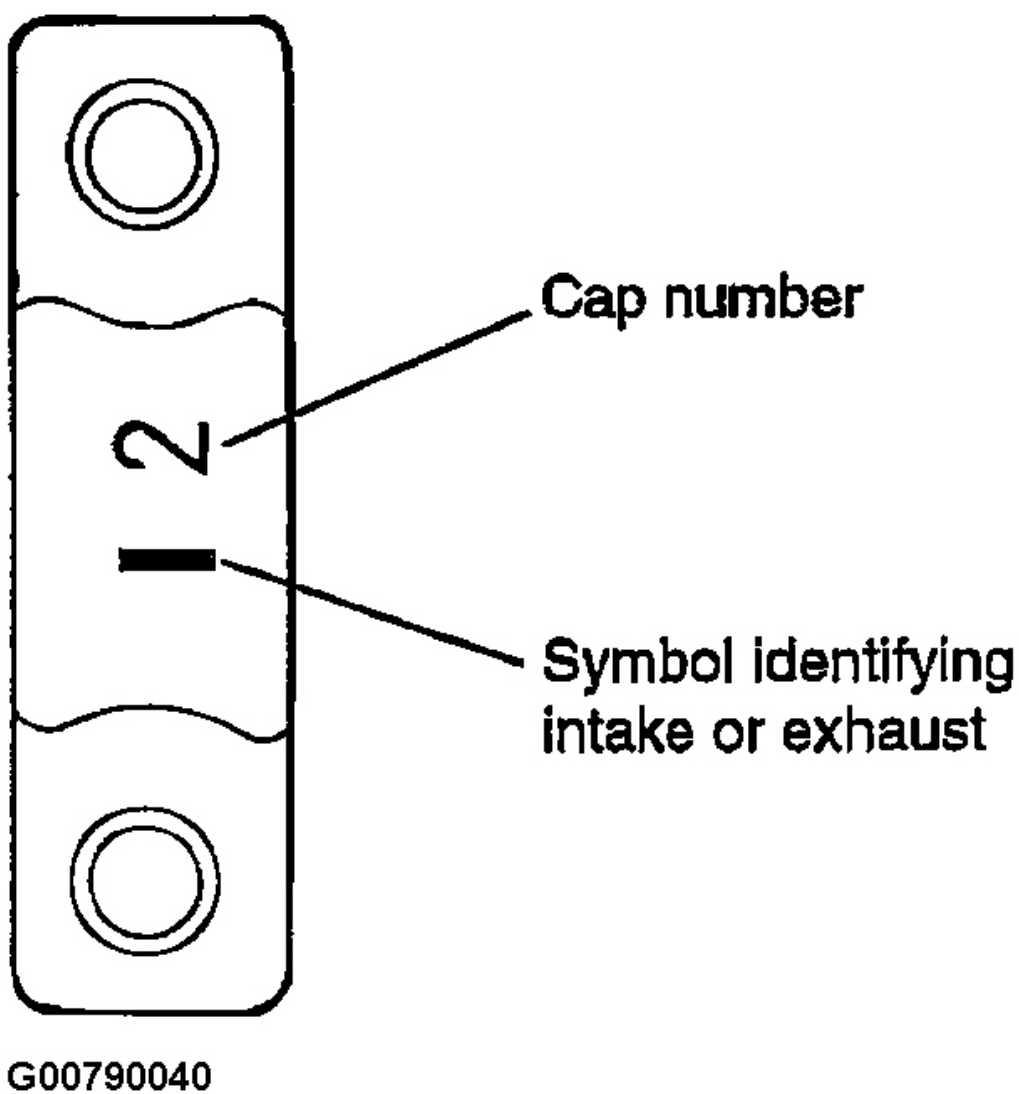


Fig. 96: Identifying Camshaft Bearing Caps

Courtesy of HYUNDAI MOTOR CO.


3. Check that the camshaft can be easily turned by hand. After checking, remove the bearing caps and the camshafts, and then install the rocker arms.

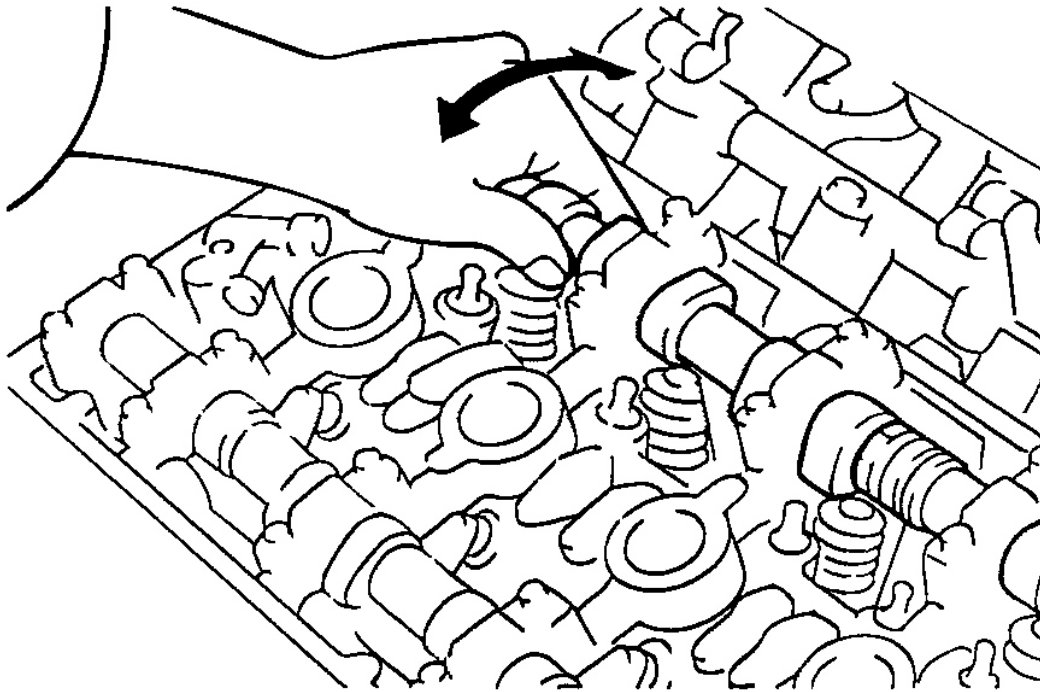

G00790041

Fig. 97: Checking Rotational Force Of Camshaft
Courtesy of HYUNDAI MOTOR CO.

4. Make sure that the dowel pins on the camshaft sprocket ends are located on the top.

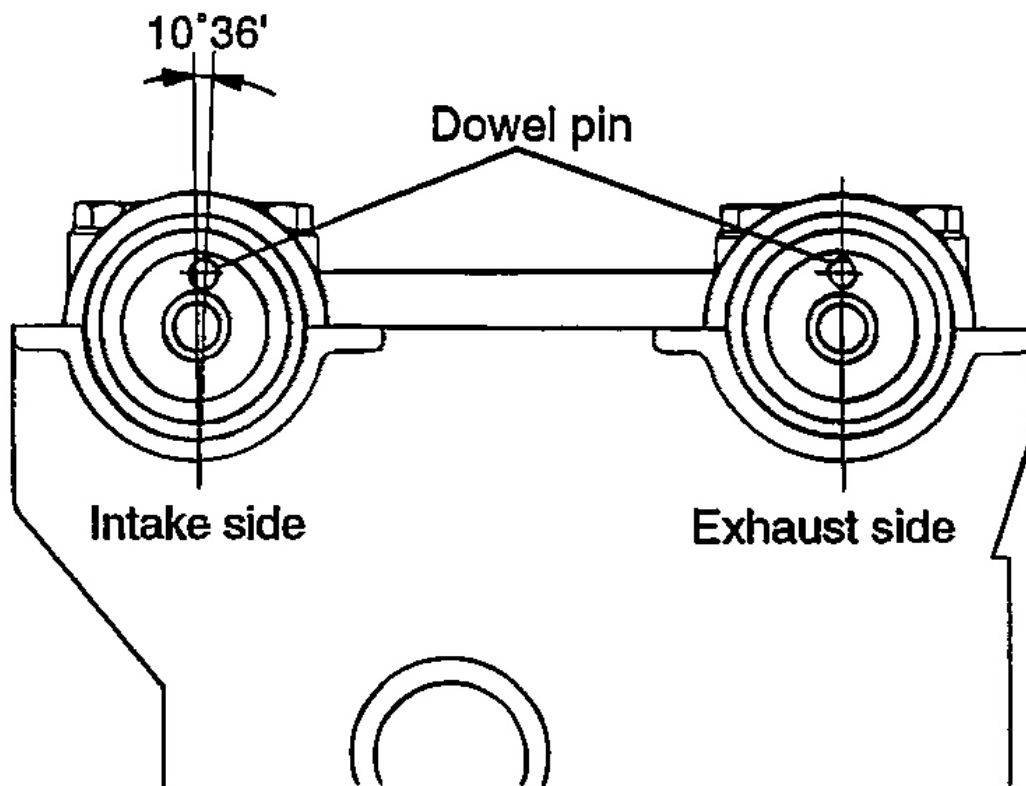

G00790042

Fig. 98: Identifying Dowel Pins
Courtesy of HYUNDAI MOTOR CO.


5. Tighten the bearing caps to the specified torque in two or three increments as shown.

NOTE: Tighten the rocker arms uniformly.

Tightening torque

Bearing cap bolts :

19 ~ 21 Nm (190 ~ 210 kg.cm, 14 ~ 15 lb.ft)

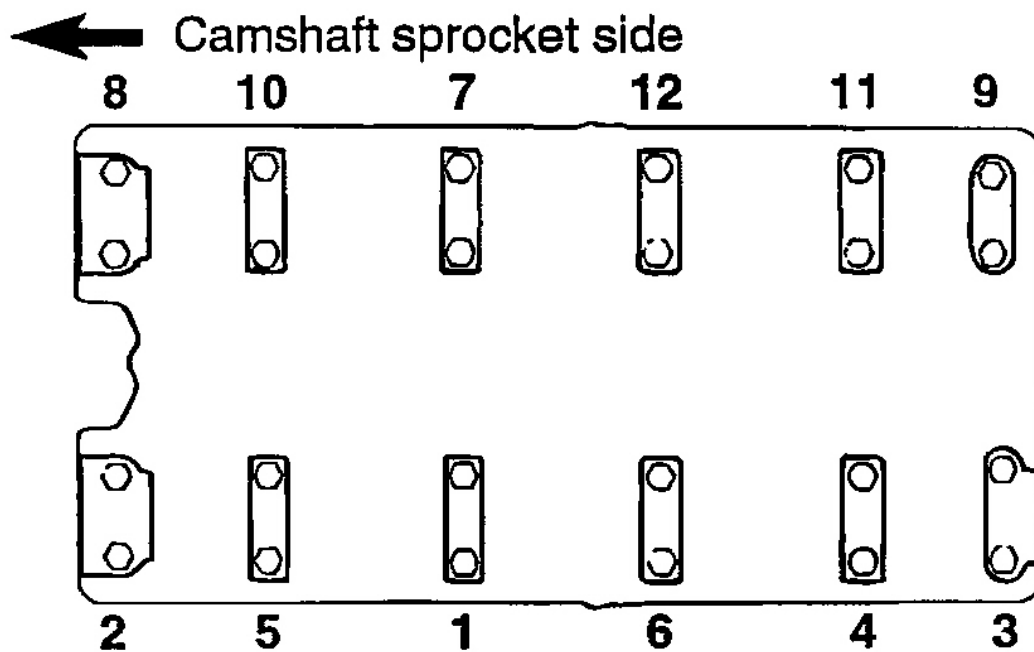


G00790043

Fig. 99: Identifying Camshaft Bearing Cap Tightening Sequence

Courtesy of HYUNDAI MOTOR CO.

6. Using the special tools, camshaft oil seal Installer and guide (09221-21000, 09221-21100). Be sure to apply engine oil to the external surface of the oil seal.

Insert the oil seal along the camshaft front end and install it by driving the installer with a hammer until the oil seal is fully seated.

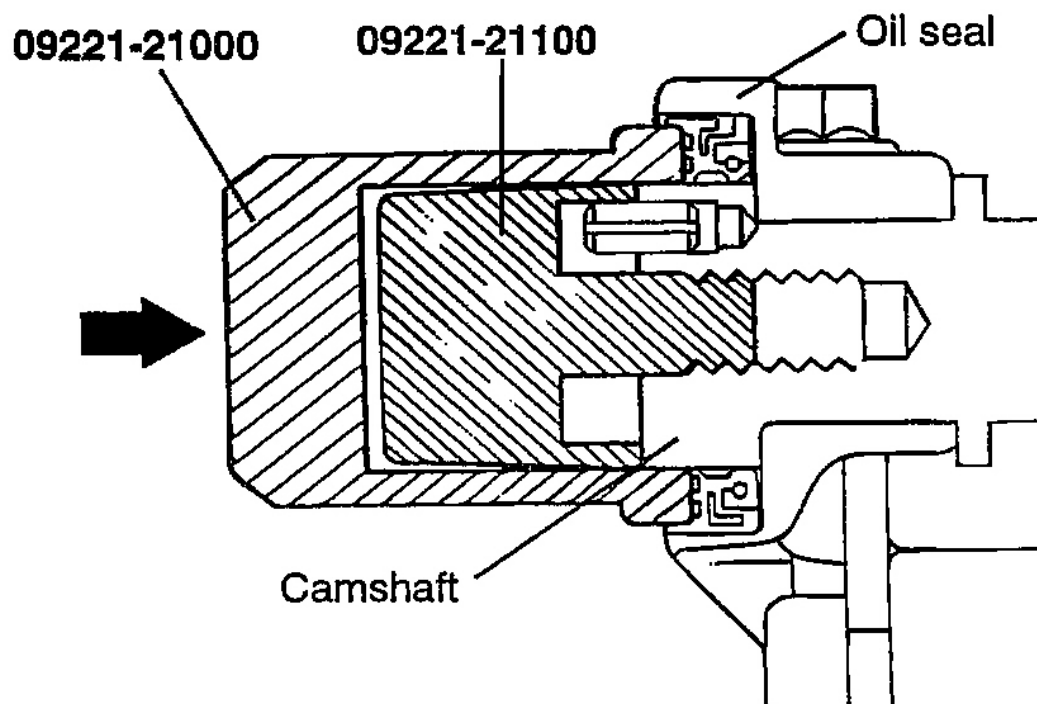

G00790044


Fig. 100: Installing Camshaft Oil Seal
Courtesy of HYUNDAI MOTOR CO.

7. Install the camshaft sprocket bolts to the specified torque.

Tightening torque


Camshaft sprocket bolts :

80 ~ 100 Nm (800 ~ 1000 kg.cm, 58 ~ 72 lb.ft)

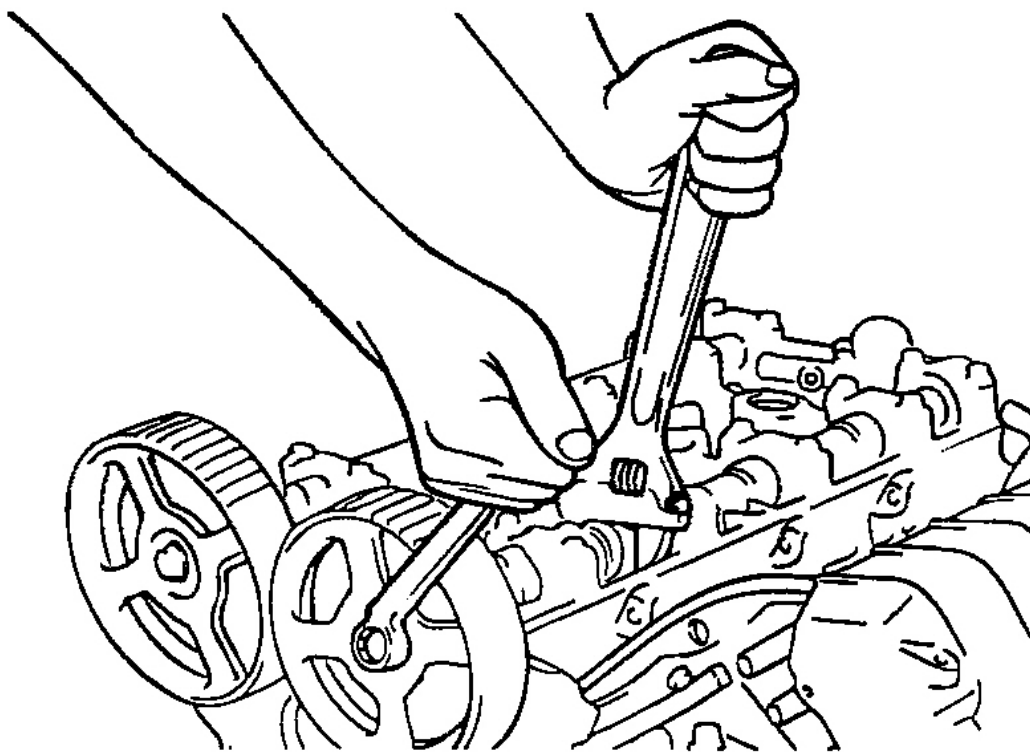

G00790045

Fig. 101: Tightening Camshaft Sprocket
Courtesy of HYUNDAI MOTOR CO.

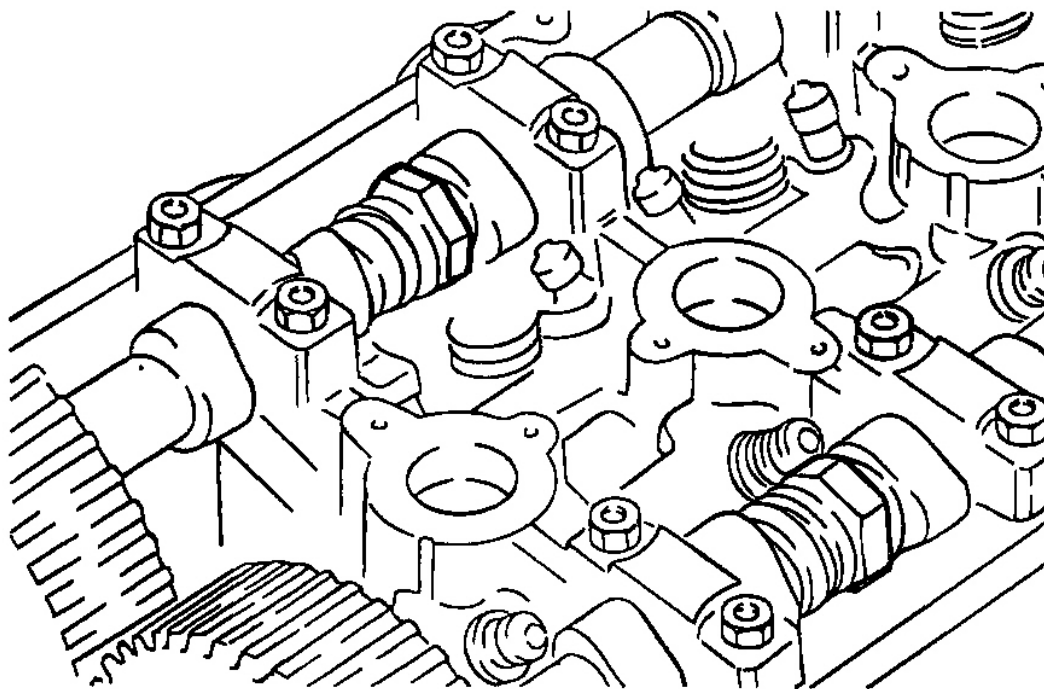

G00790046

Fig. 102: View Of Camshafts

Courtesy of HYUNDAI MOTOR CO.

8. Install the rocker cover. Apply sealant as shown.

Tightening torque


Rocker cover bolts : 8 ~ 10 Nm (80 ~ 100 kg.cm, 6 ~ 7 lb.ft)

Center cover bolts : 4 ~ 5 Nm (40 ~ 50 kg.cm, 3 ~ 4 lb.ft)

Sealant

A Portion : Threebond No. 10 or equivalent

B Portion : Threebond No. 1212D or equivalent

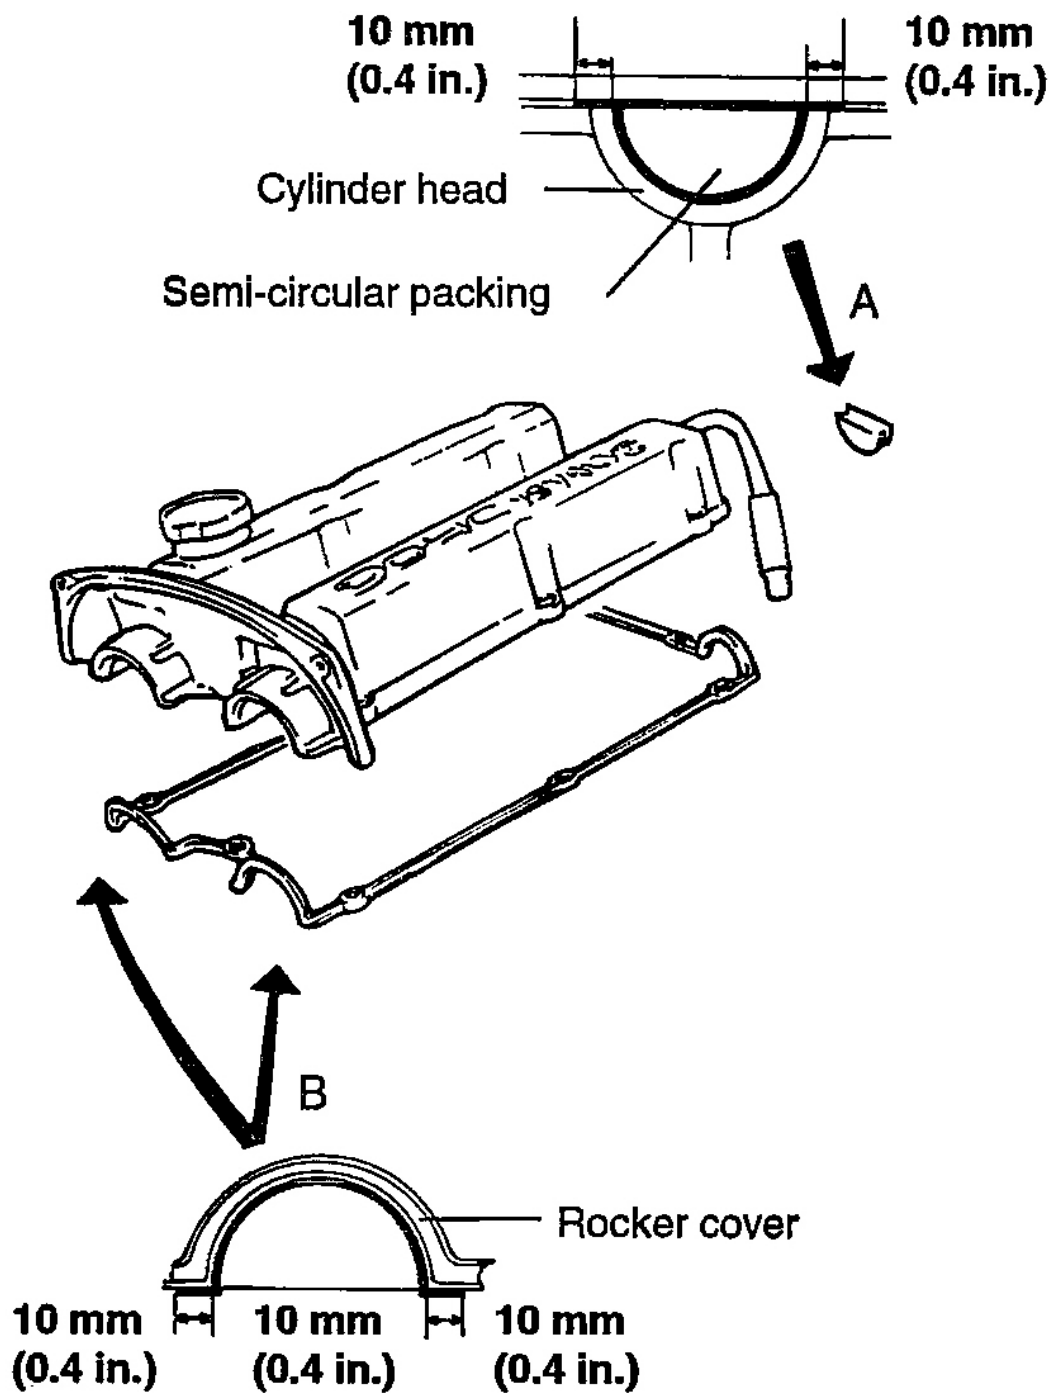


G00790047

Fig. 103: Identifying Rocker Cover
 Courtesy of HYUNDAI MOTOR CO.

Bolt

A : 13EA (Rocker cover bolts)


B : 4EA (Center cover bolts)

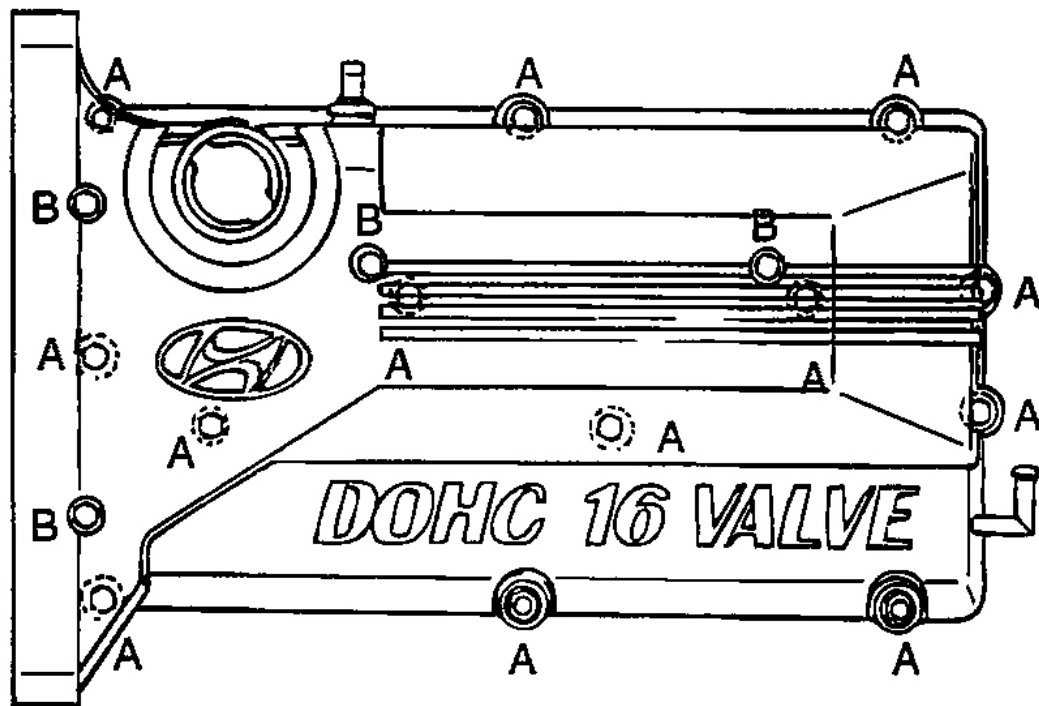

G00790048

Fig. 104: Identifying Rocker Cover Bolts
Courtesy of HYUNDAI MOTOR CO.


9. Install the spark plugs, and ignition coils. Connect the secondary wires and then install the center cover.

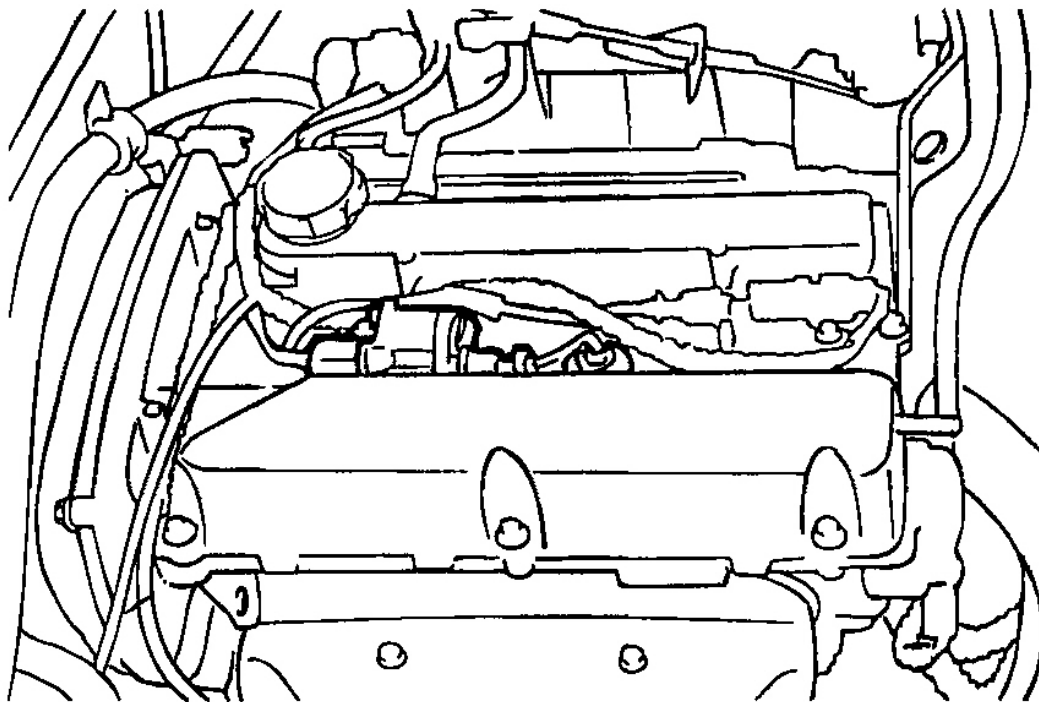

G00790049

Fig. 105: View Of Rocker Cover Installed
Courtesy of HYUNDAI MOTOR CO.


10. Install the dowel pin on the sprocket side of the intake cam shaft.

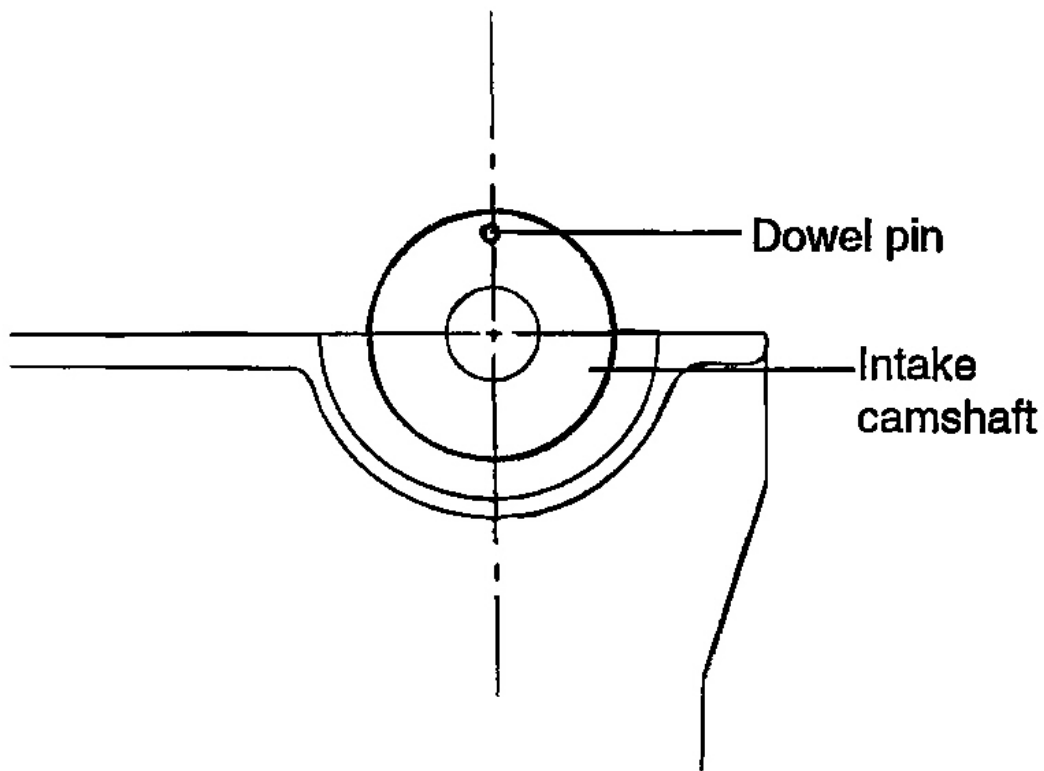

G00790050

Fig. 106: Identifying Dowel Pin
Courtesy of HYUNDAI MOTOR CO.

11. Install the cam position sensor support assembly after installing the cam position sensor cylinder on the exhaust camshaft.

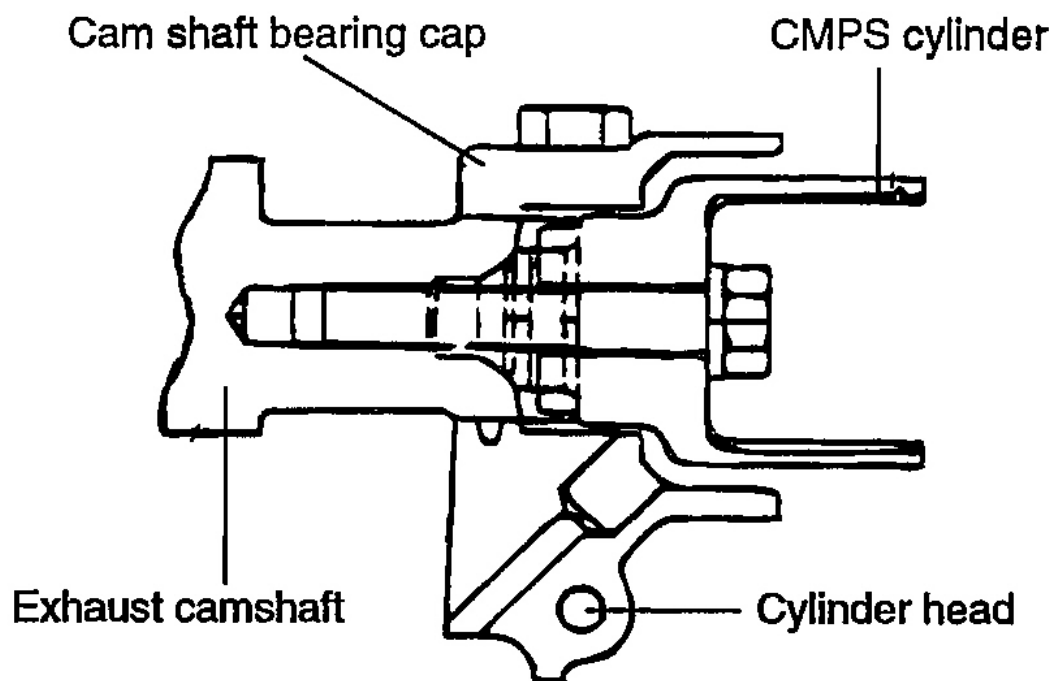


G00790051

Fig. 107: View Cam Position Sensor Support Assembly
Courtesy of HYUNDAI MOTOR CO.

PISTON

Components

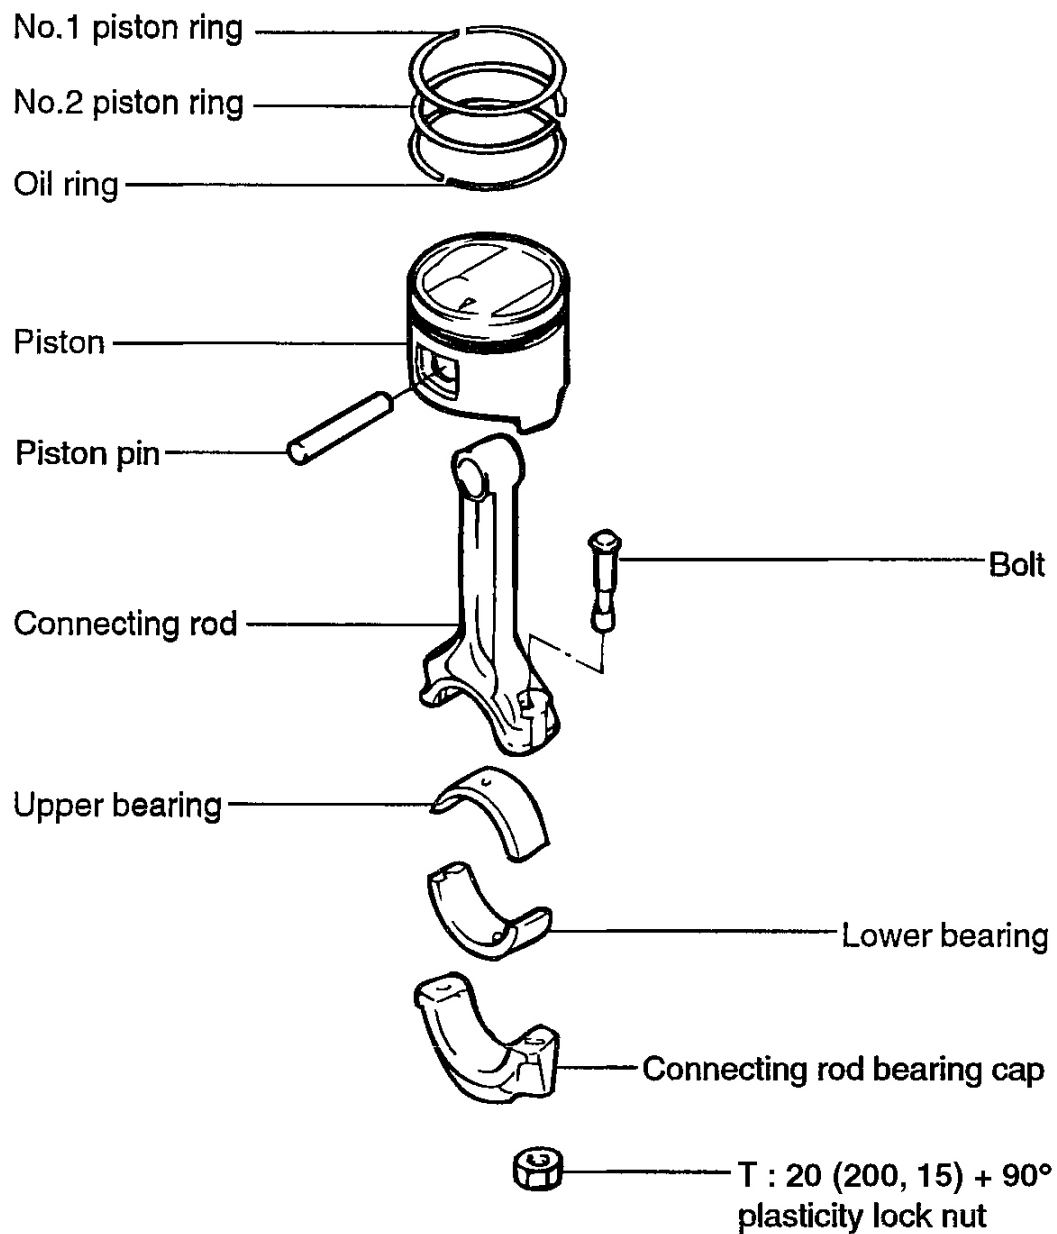

TORQUE : Nm (kg.cm, lb.ft)

G00790052

Fig. 108: Piston Components


Courtesy of HYUNDAI MOTOR CO.

Disassembly

Connecting Rod Cap

NOTE: Keep the bearings in order with their corresponding connecting rods (according to cylinder numbers) for proper reassembly.

1. Remove the connecting rod cap nuts and then remove the caps and the big end lower bearing. Mark for reassembly.
2. Push each piston-connecting rod assembly toward the top of the cylinder.

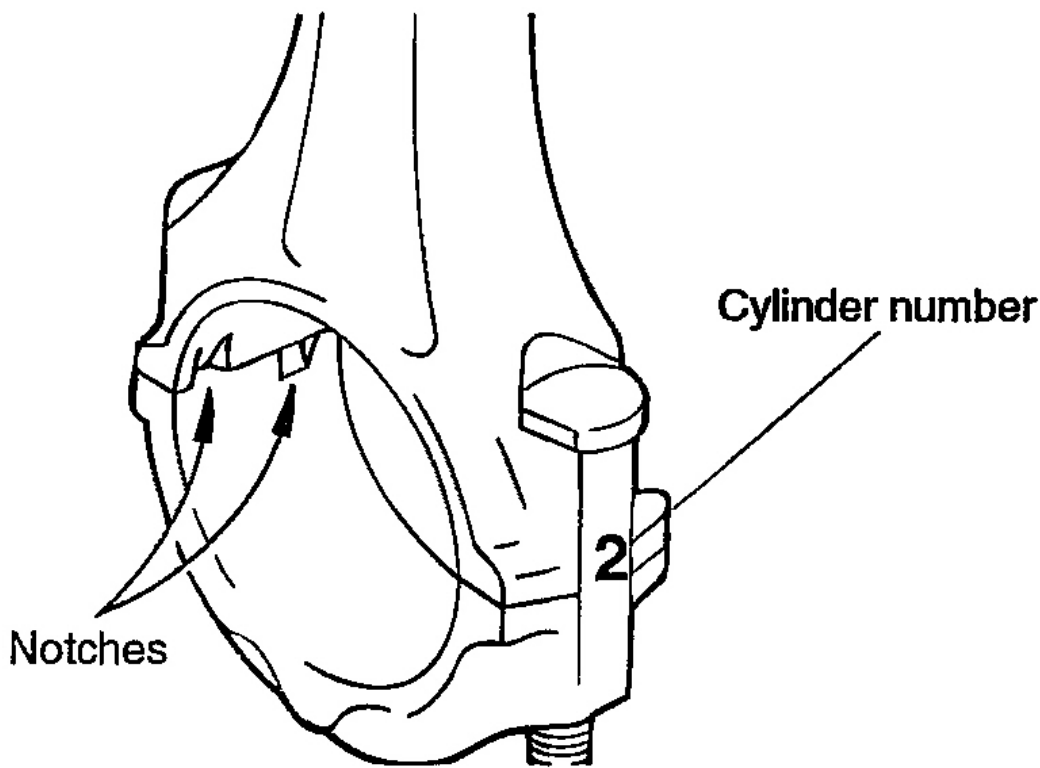


G00790053

Fig. 109: Identifying Connecting Rod Bearing Notches
Courtesy of HYUNDAI MOTOR CO.

Disassembly & Reassembly Of Piston Pin


1. Use the special tools 09234 - 33001 and 09234 - 33002, disassemble and reassemble the piston and connecting rod.

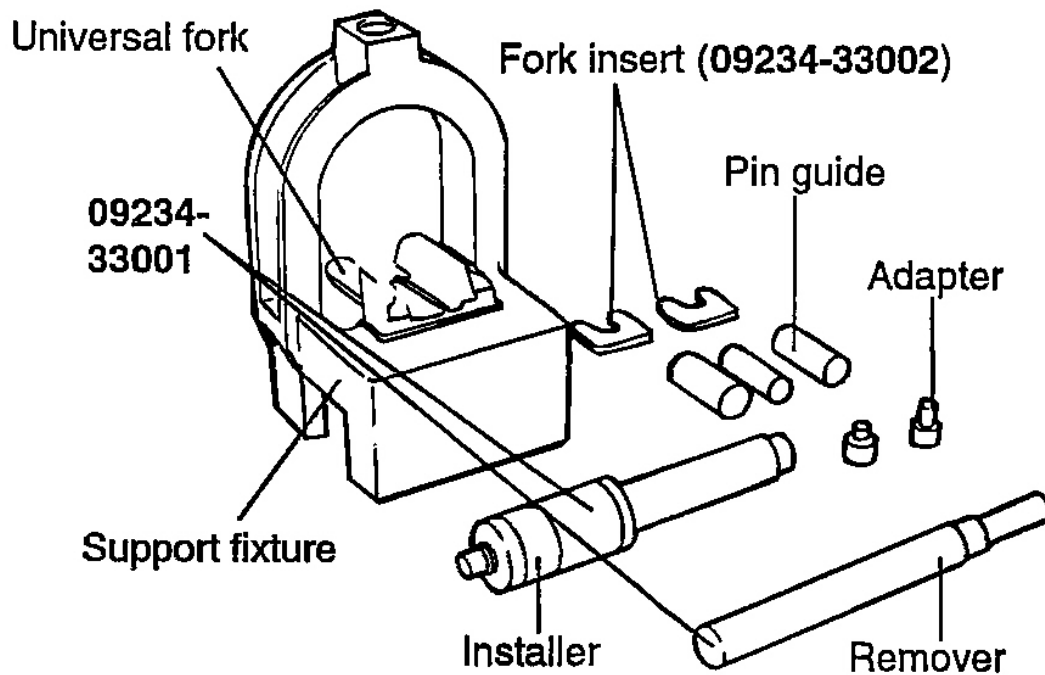

G00790054

Fig. 110: Identifying Special Tools
Courtesy of HYUNDAI MOTOR CO.

2. The piston pin is a press fit in the rod little end, and the piston floats on the pin.
3. The tool consists of a support fixture with fork inserts, guides, adapters, an installer and a remover. The piston is supported in the support fixture while the pin is being installed or removed. Guides help position the pin as it is installed or removed, while the rod is supported by fork inserts.
4. To remove the pin from the piston, place the piston in the support fixture while the rod resting on the fork inserts. Pass the remover tool through the top of the support fixture and use it to press out the pin.

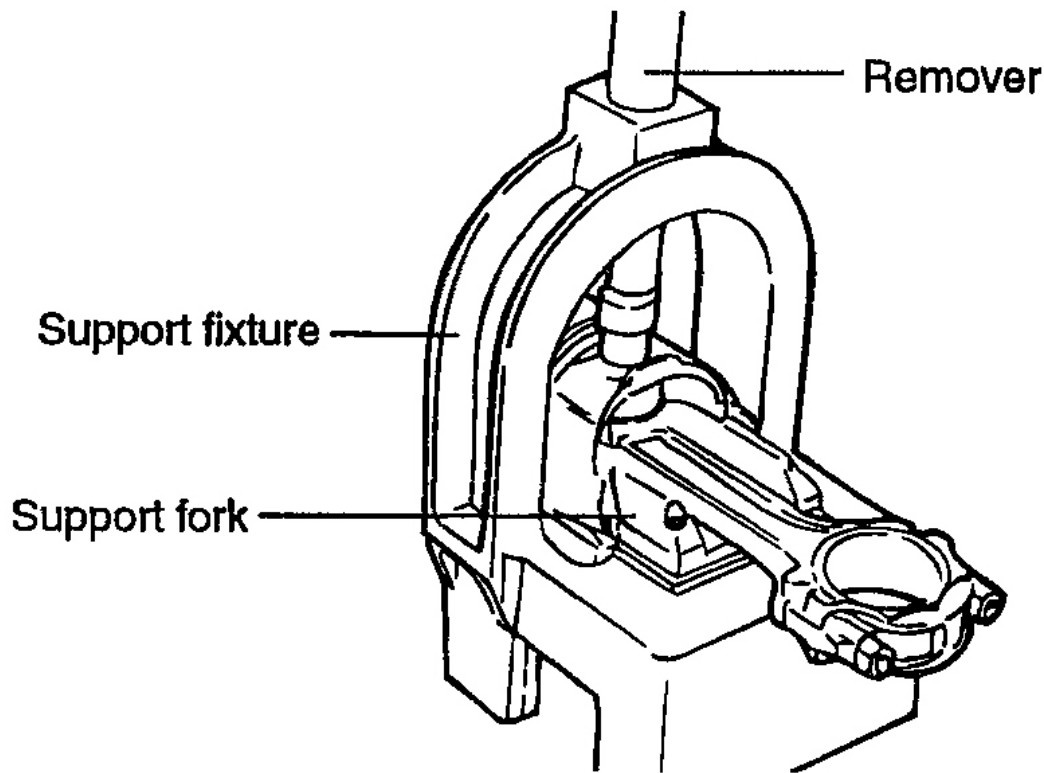


G00790055

Fig. 111: Removing Piston Pin
Courtesy of HYUNDAI MOTOR CO.

5. To install a new pin, the proper fork inserts must be in place to support the rod.
6. Position the rod inside the piston. Insert the proper pin guide through on side of the piston and through the rod. Hand tap the pin guide so it is held by the piston. Insert the new pin into the piston from the other side and set the assembly into the support fixture with the pin guide facing down.

NOTE: The pin guide should be centered on the connecting rod though the piston. If assembled correctly, the pin guide will sit exactly under the center of the hole in the tool's arch, and rest evenly on the fork inserts. If the wrong size pin guide is used, the piston and pin will not line up with the support fixture.

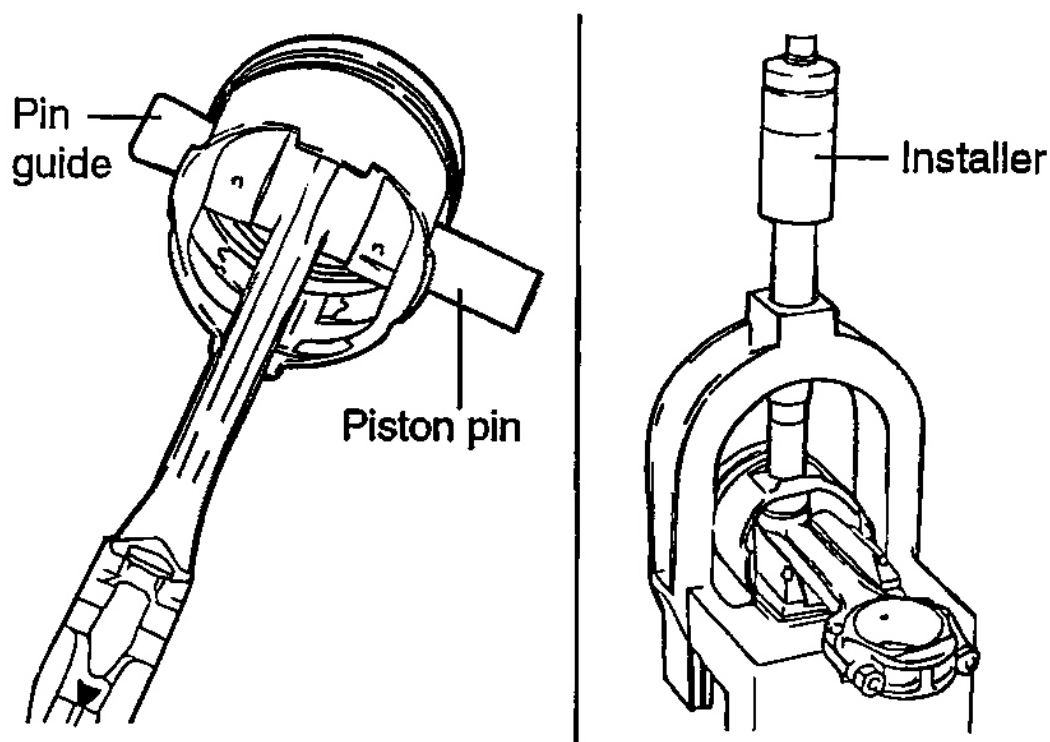


G00790056

Fig. 112: Installing Piston Pin
Courtesy of HYUNDAI MOTOR CO.

7. Insert the installer tool through the hole in the arch of the support fixture and use an hydraulic press to force the piston pin through the rod little end. Continue pressing until the pin guide falls free and the installer tool seats against the top of the arch.

CAUTION: Do not exceed 1250 +/- 500 kg (2756 +/- 1102 lb) of force when stopping the installing arbor sleeve against the arch.

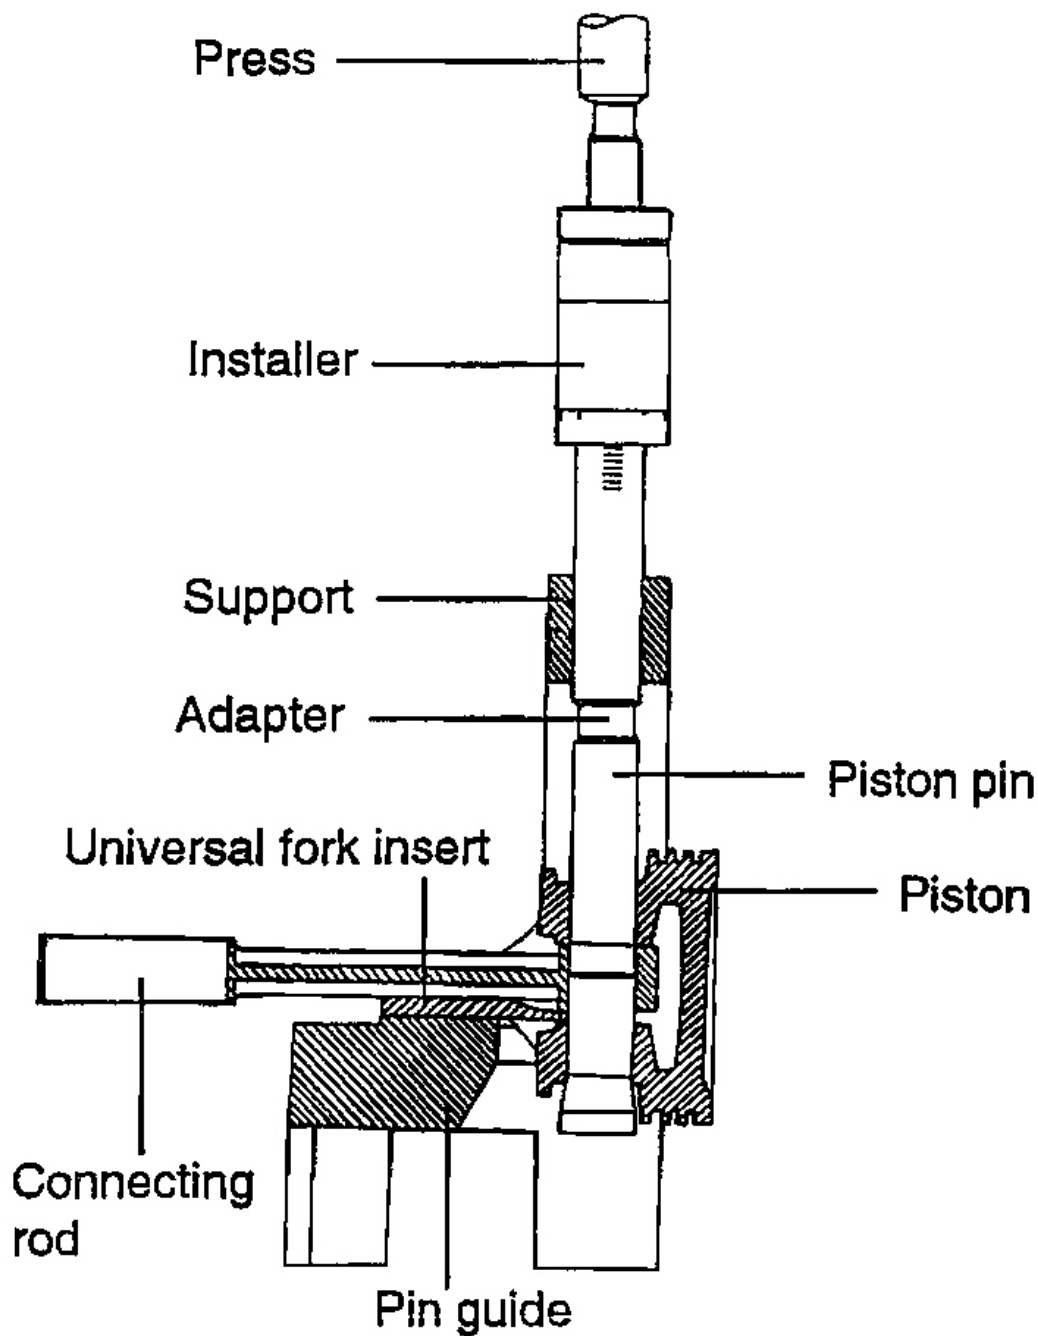

G00790057

Fig. 113: Installing Piston Pin
 Courtesy of HYUNDAI MOTOR CO.

Inspection**Piston & Piston Pins**

1. Check each piston for scuffing, scoring, wear and other defects. Replace any piston that is defective.
2. Check each piston ring for breakage, damage and abnormal wear. Replace the defective rings. When the piston requires replacement, its rings should also be replaced.
3. Check that the piston pin fits in the piston pin hole. Replace any piston and pin assembly that is defective. The piston pin must be smoothly pressed by hand into the pin hole (at room temperature).

Piston Rings

1. Measure the piston ring side clearance. If the measured value exceeds the service limit, insert a new ring in a ring groove to measure the side clearance. If the clearance still exceeds the service limit, replace the piston and rings together. If it is less than the service limit, replace only the piston ring only.

Standard value

Piston ring side clearance :

No. 1 : 0.03 ~ 0.07 mm (0.0012 ~ 0.0028 in.)

No. 2 : 0.02 ~ 0.06 mm (0.0008 ~ 0.0024 in.)

Oil ring : 0.06 ~ 0.15 mm (0.0024 ~ 0.0059 in.)

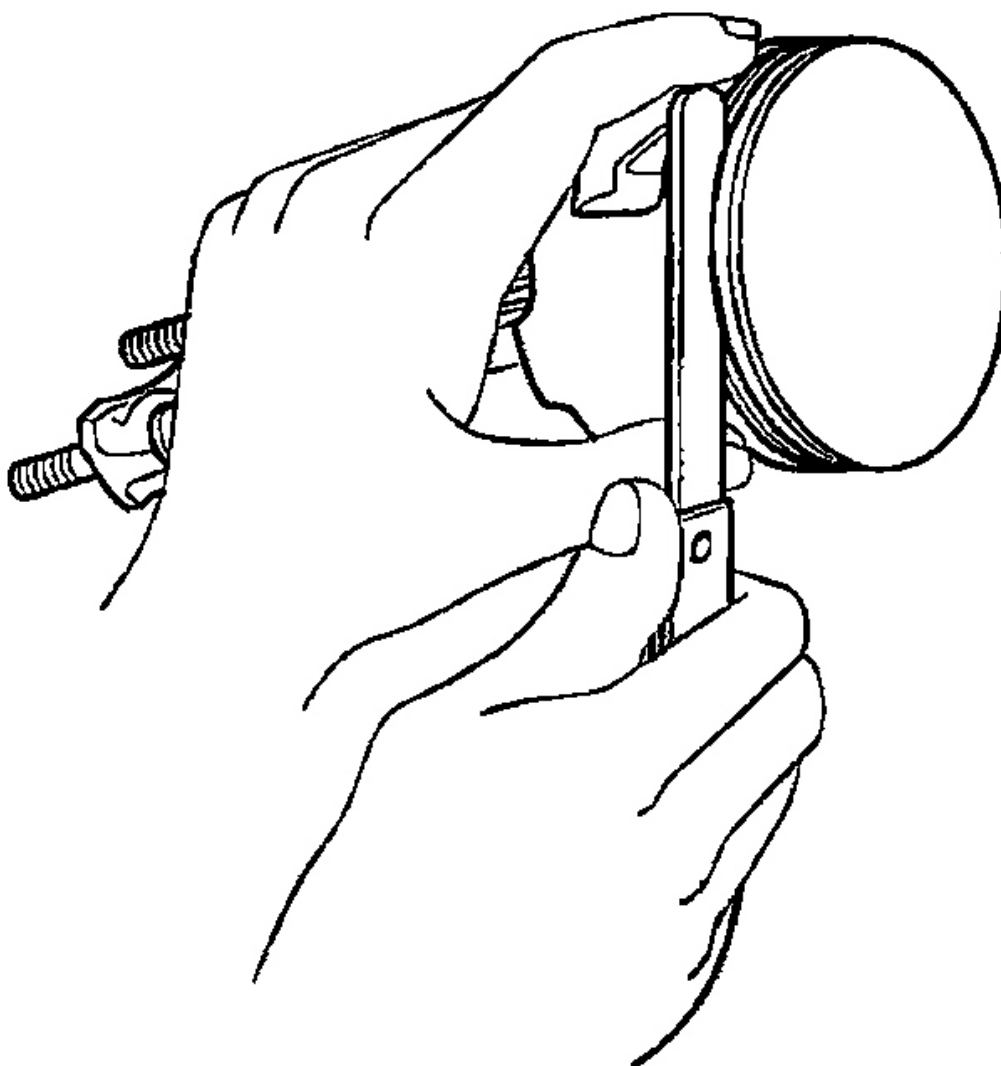
**G00790058**

Fig. 114: Measuring Piston Ring Side Clearance
Courtesy of HYUNDAI MOTOR CO.

2. To measure the piston ring end gap, insert a piston ring into the cylinder bore. Position the ring at right angles to the cylinder wall by gently pressing it down with a piston. Measure the gap with a feeler gauge. If the gap exceeds the service limit, replace the piston ring.

Piston ring end gap

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

[Standard dimensions]


No.1 : 0.25 - 0.35 mm (0.0098 - 0.0138 in.)

No.2 : 0.40 - 0.55 mm (0.0157 - 0.0216 in.)

[Limit]

No.1, No.2 : 0.8 mm (0.031 in.)

Oil ring side rail : 1.0 mm (0.039 in.)

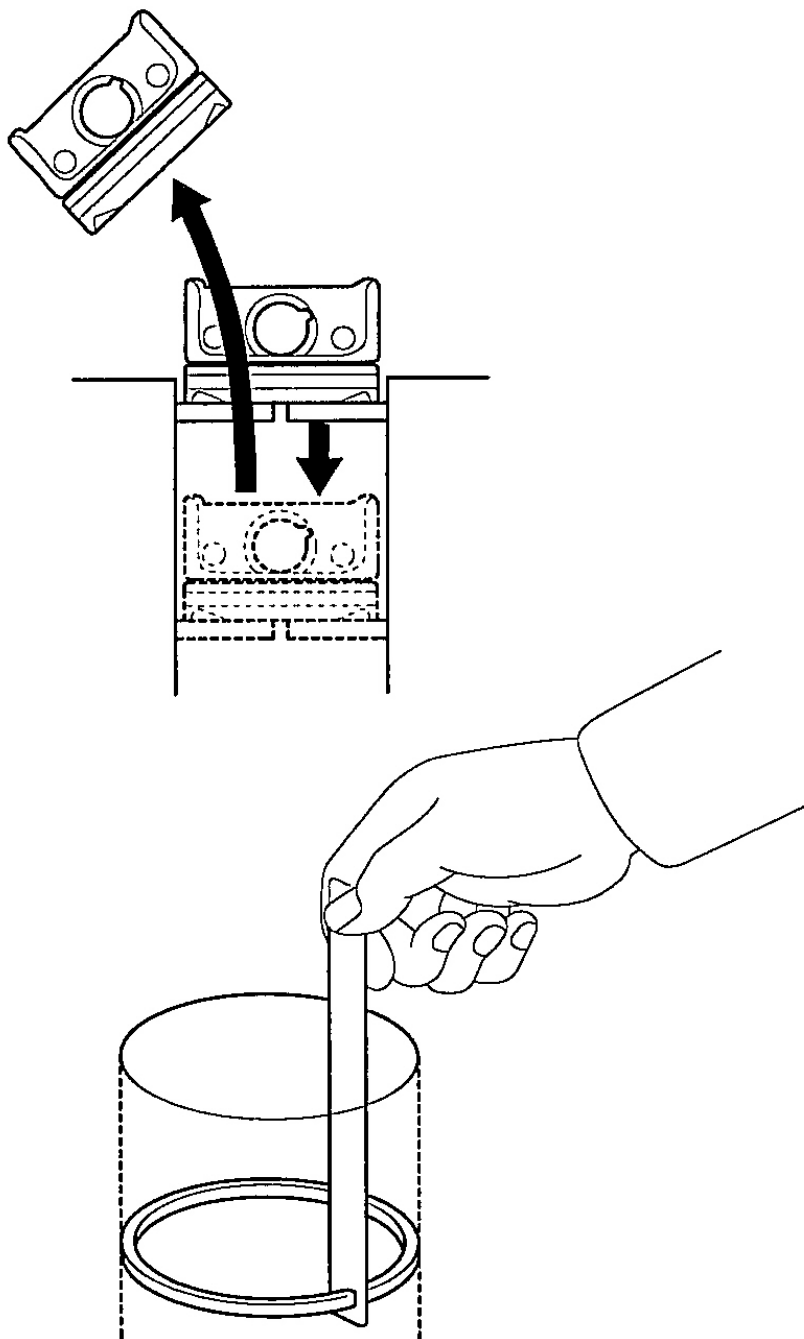

G00790059

Fig. 115: Measuring Piston Ring End Gap
Courtesy of HYUNDAI MOTOR CO.

Connecting Rods

1. When the connecting rod cap is installed, make sure that cylinder numbers, marked on the rod end cap at disassembly, match. When a new connecting rod is installed, make sure that the notches for holding the bearing in place are on the same side.
2. Replace the connecting rod if it is damaged at either end of the thrust faces. If it has stratified wear in, or if the surface of, the inside diameter of the small end is severely rough, replace the rod.


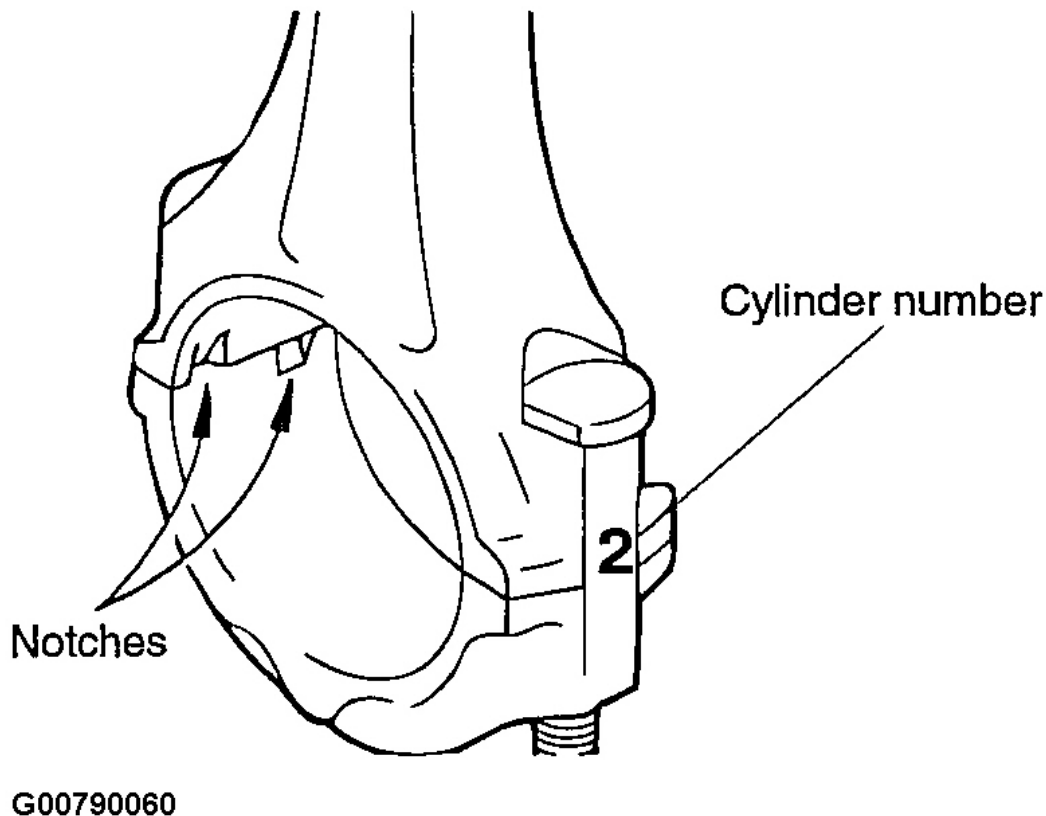


Fig. 116: Identifying Connecting Rod Bearing Notches
Courtesy of HYUNDAI MOTOR CO.


Reassembly

1. Install the spacer.

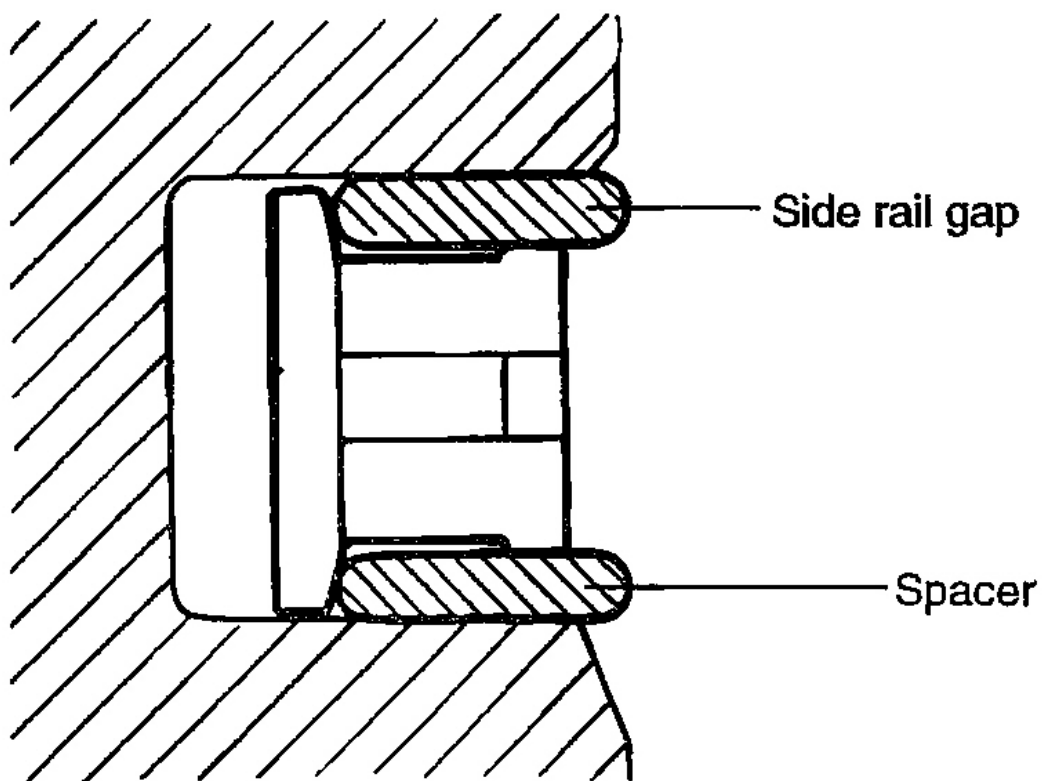

G00790061

Fig. 117: Identifying Spacer Installation (1 Of 2)
Courtesy of HYUNDAI MOTOR CO.

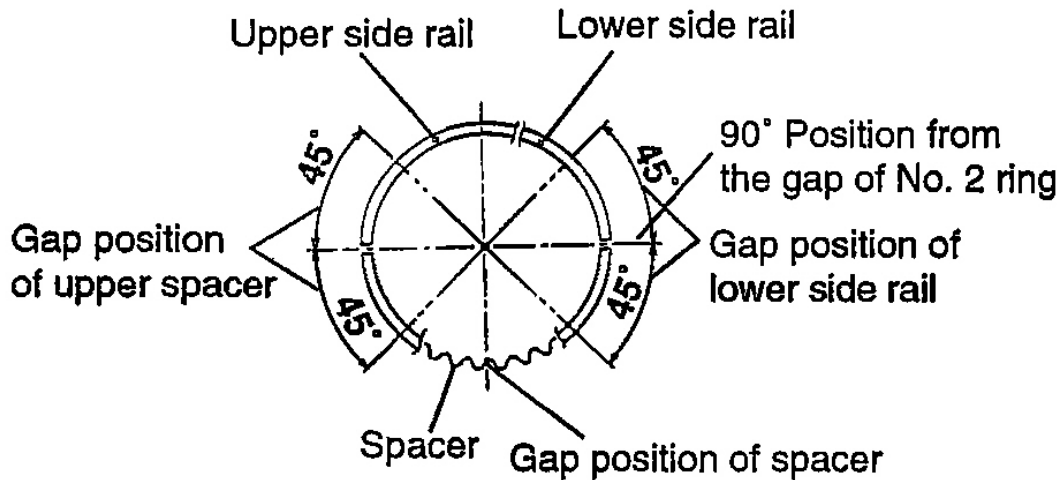

G00790062


Fig. 118: Identifying Spacer Installation (2 Of 2)

Courtesy of HYUNDAI MOTOR CO.

2. Install the upper side rail. To install the side rail, first put one end of the side rail between the piston ring groove and spacer, hold it firmly, then press down with your finger the portion to be inserted into groove as illustrated.

WARNING: Do not use a piston ring expander when installing the side rail.


3. Install the lower side rail by the same procedure as described in Step No. 2.

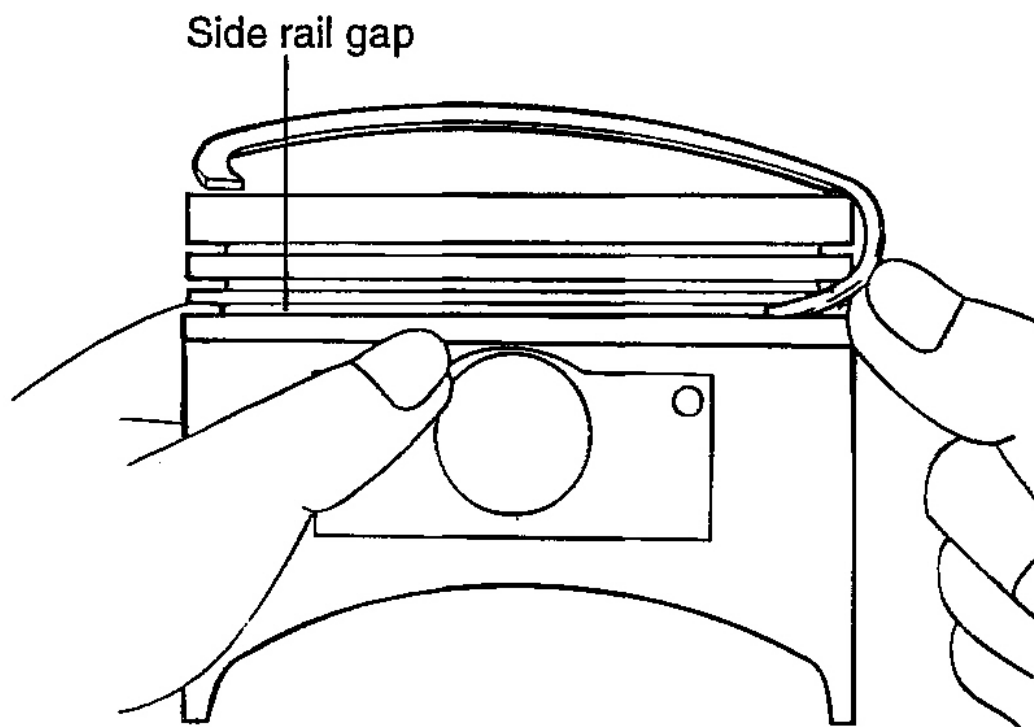

G00790063

Fig. 119: Installing Side Rail
Courtesy of HYUNDAI MOTOR CO.

4. Apply engine oil around the piston and piston grooves.
5. Using piston ring expander, install the No. 2 piston ring.
6. Install the No. 1 piston ring.

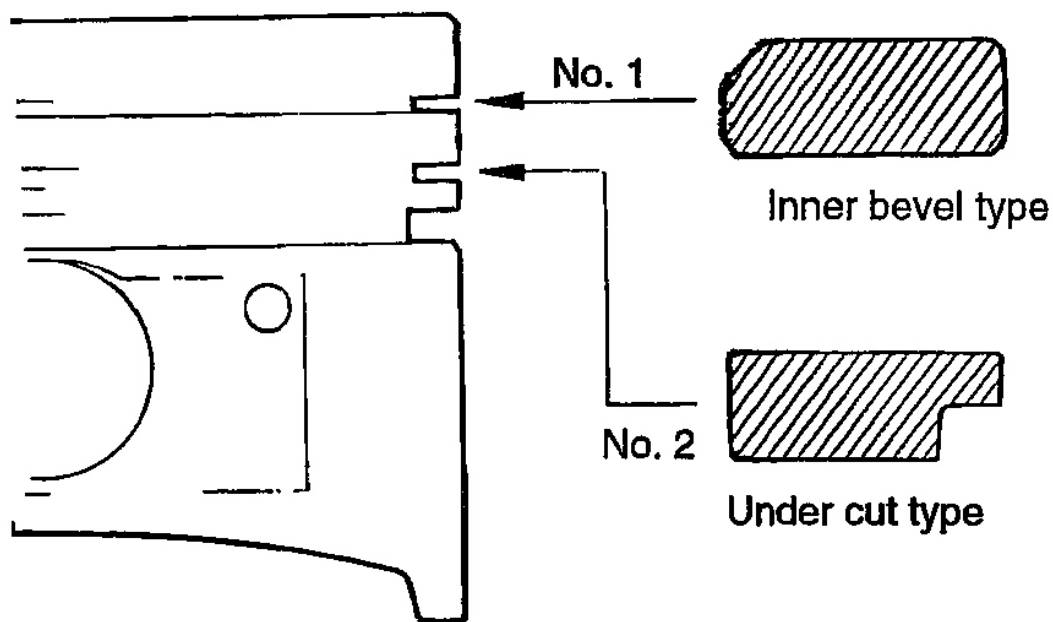

G00790064

Fig. 120: Identifying Piston Rings

Courtesy of HYUNDAI MOTOR CO.

7. Place each piston ring end gap as far apart from its neighboring gaps as possible. Make sure that gaps are not positioned in the thrust and pin directions.
8. Hold the piston rings firmly with a piston ring compressor as they are inserted into cylinder.

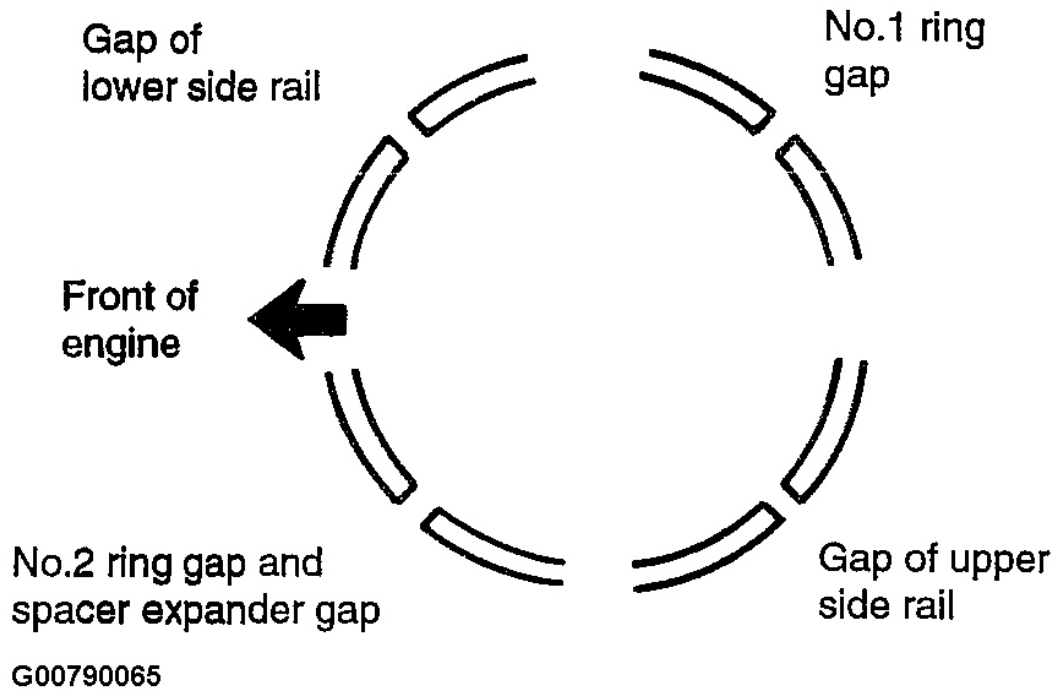


Fig. 121: Identifying Piston Installation
Courtesy of HYUNDAI MOTOR CO.

9. Make sure that the front mark of the piston and the front mark (identification mark) of the connecting rod are directed toward the front of the engine.
10. When the connecting rod cap is installed, make sure that the cylinder numbers put on the rod and cap at disassembly match.
11. When a new connecting rod is installed, make sure that the notches for holding the bearing in place are on the same side.
12. Tighten the connecting rod cap nuts.

Tightening torque

Connecting rod cap nuts :

20 Nm (200 kg.cm, 15 lb.ft) + 90°

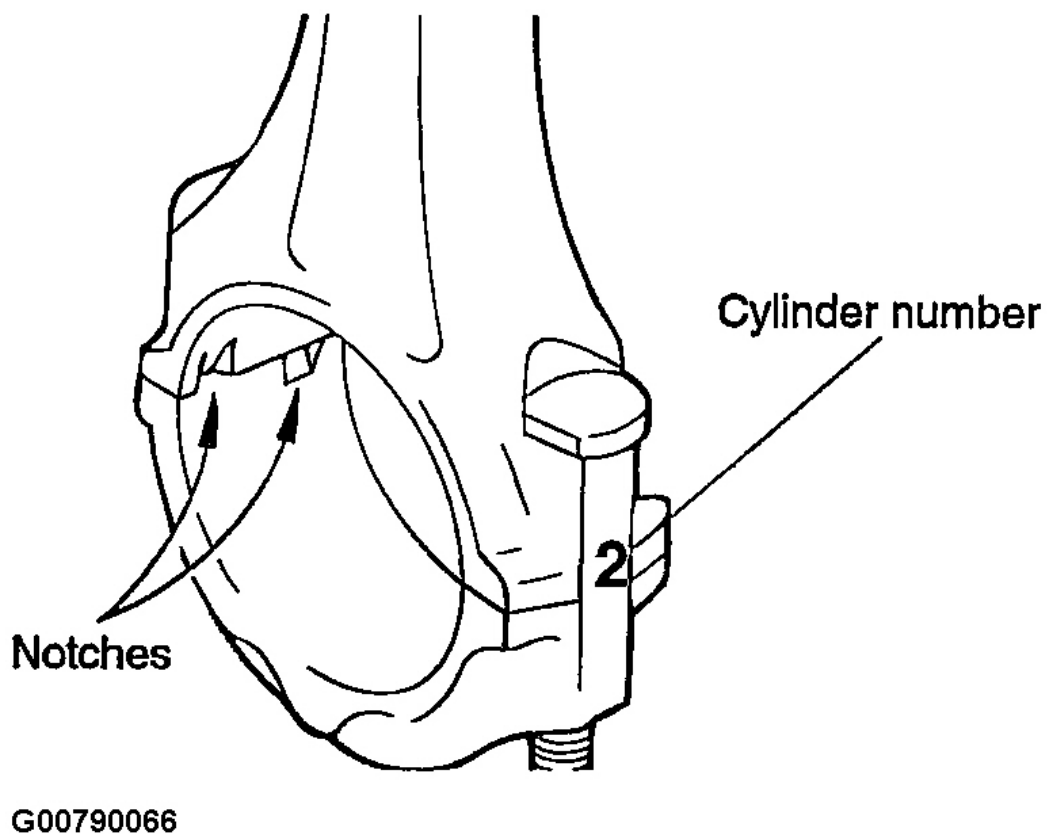


Fig. 122: Identifying Connecting Rod Bearing Notches
Courtesy of HYUNDAI MOTOR CO.

13. Check the connecting rod side clearance.


Connecting rod side clearance

Standard : 0.10 ~ 0.25 mm (0.004 ~ 0.0098 in.)

Limit : 0.4 mm (0.0157 in.)

CRANKSHAFT

Components

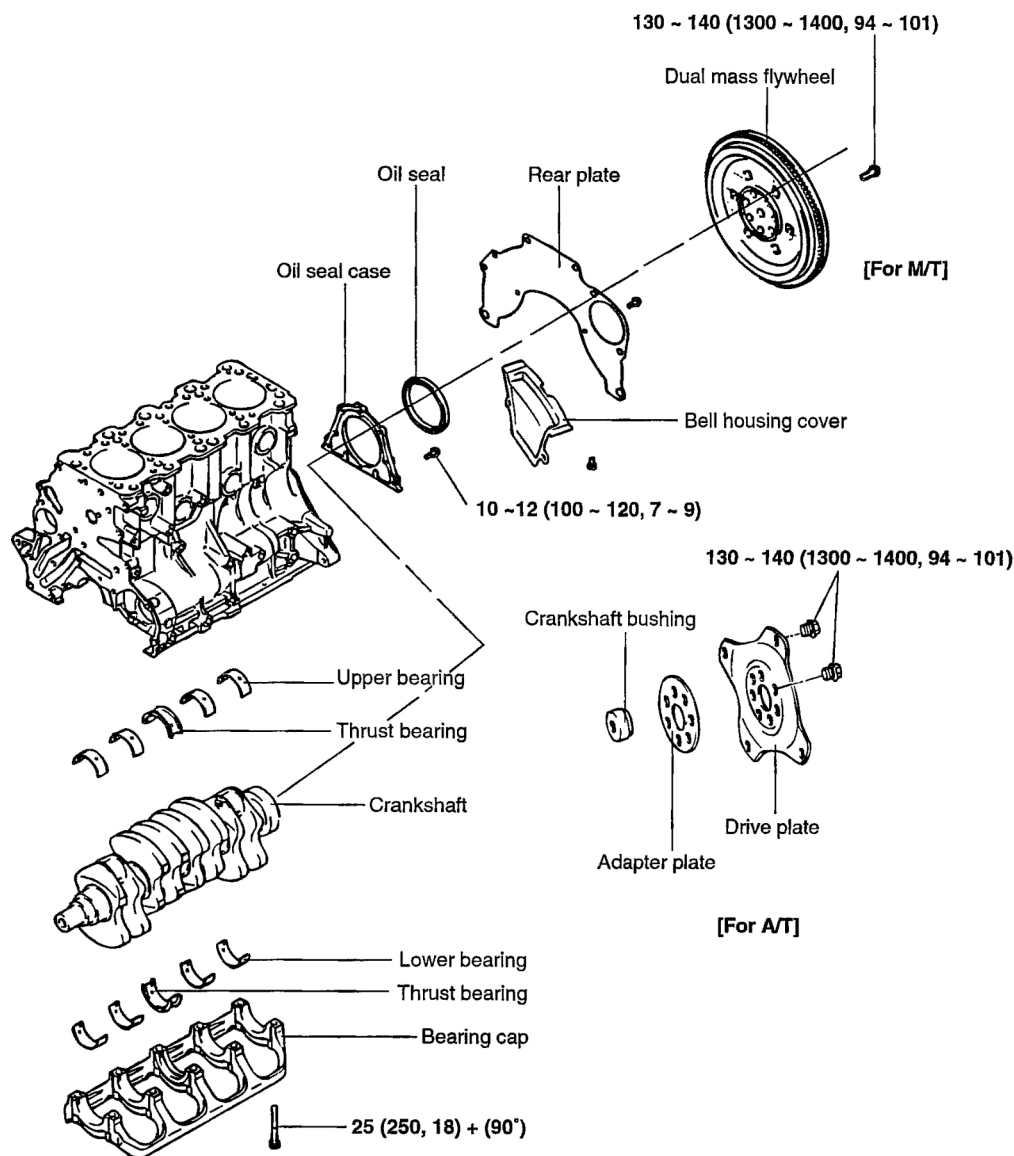

TORQUE : Nm (kg·cm, lb·ft)

G00790067

Fig. 123: Crankshaft Components
Courtesy of HYUNDAI MOTOR CO.

Disassembly

1. Remove the following components :
 - Timing belt. See **TIMING BELT**.
 - Front case. See **FRONT CASE**.

- Flywheel.
 - Cylinder head assembly. See **CYLINDER HEAD**.
 - Oil pan.
2. Remove the rear plate and the rear oil seal.
 3. Remove the connecting rod caps.

NOTE: **Mark the main bearing caps to be able to reassemble in the original position and direction.**

4. Remove the main bearing caps and the crankshaft. Keep the bearings in order according to the cap number.

Inspection

1. Check the crankshaft journals and pins for damage, uneven wear and cracks. Also check the oil holes for restrictions. Repair or replace any defective part.
2. Inspect the crankshaft journal for taper and out-of-round.


Standard value

Crankshaft journal O.D :

56.982 ~ 57.000 mm (2.2434 ~ 2.2441 in.)

Crankshaft pin O.D :

44.980 - 45.000 mm (1.7709 - 1.7717 in.)

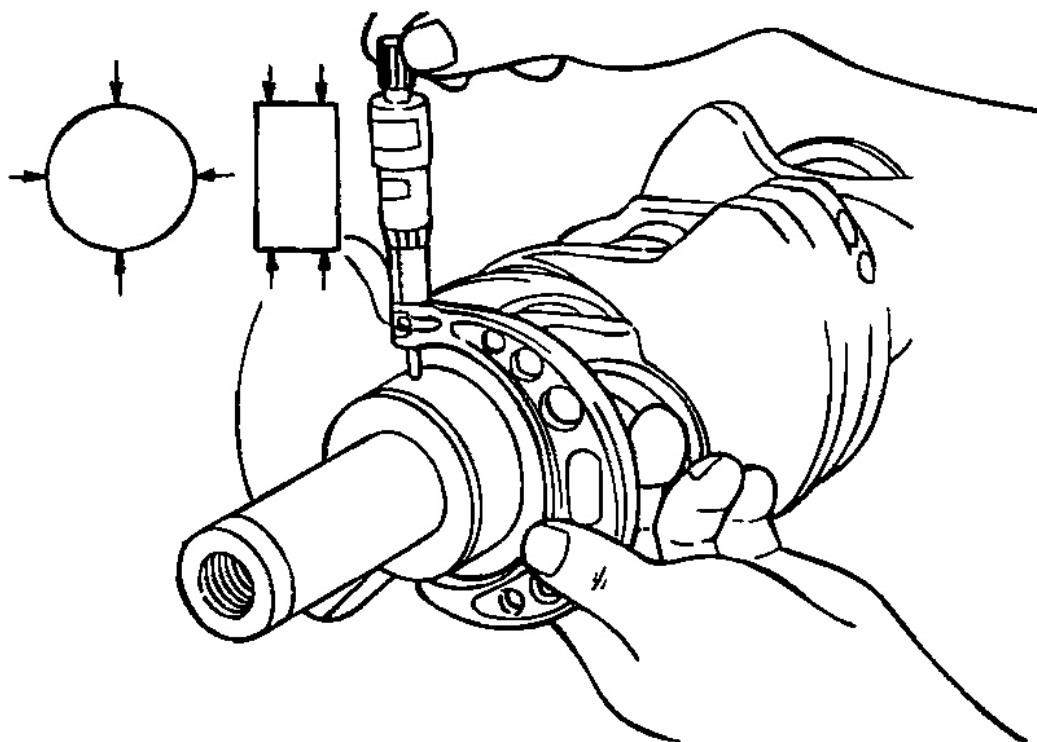

G00790068

Fig. 124: Checking Crankshaft Journal
Courtesy of HYUNDAI MOTOR CO.

Main Bearings & Connecting Rod Bearings

Visually inspect each bearing for peeling, melting, seizure and improper contact. Replace any defective bearings.

Measuring Oil Clearance

Check the oil clearance by measuring the outside diameter of the crankshaft journal as well as the inside diameter of the bearing. The clearance can be obtained by calculating the difference between the measured diameters.


Standard value

Oil clearance

Crankshaft main bearing

No. 1,2,4,5 : 0.018 ~ 0.036 mm (0.0007 ~ 0.0014 in.)

No.3 : 0.024 ~ 0.042 mm (0.0009 ~ 0.0017 in.)

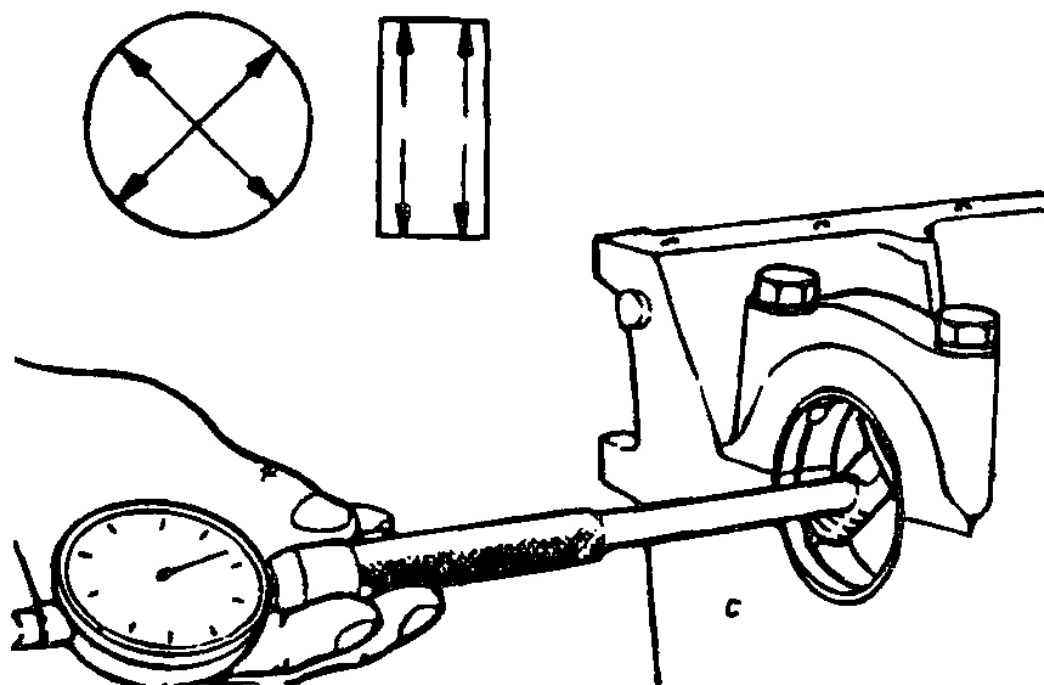


G00790069

Fig. 125: Measuring Outside Diameter Of Crankshaft Journal
Courtesy of HYUNDAI MOTOR CO.

Reassembly


1. Install a grooved main bearing (upper bearing) on the cylinder block side.

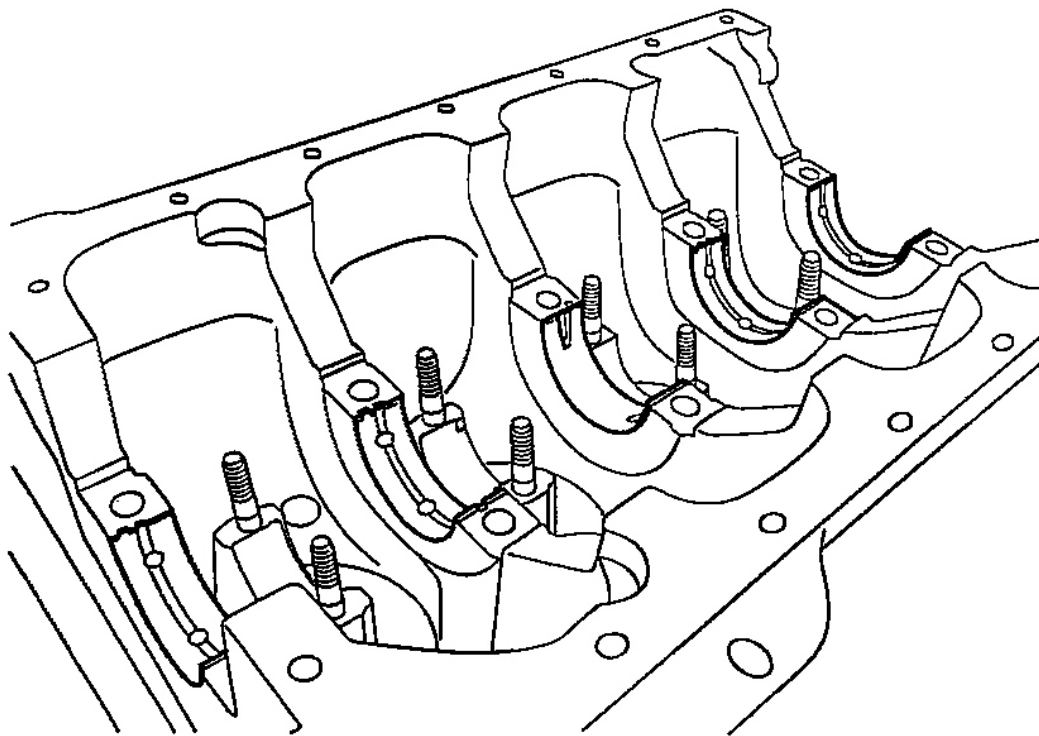

G00790070

Fig. 126: Installing Grooved Main Bearings
Courtesy of HYUNDAI MOTOR CO.

2. Install a grooveless main bearing (lower bearing) on the main bearing cap side.
3. Both upper and lower center thrust bearings.

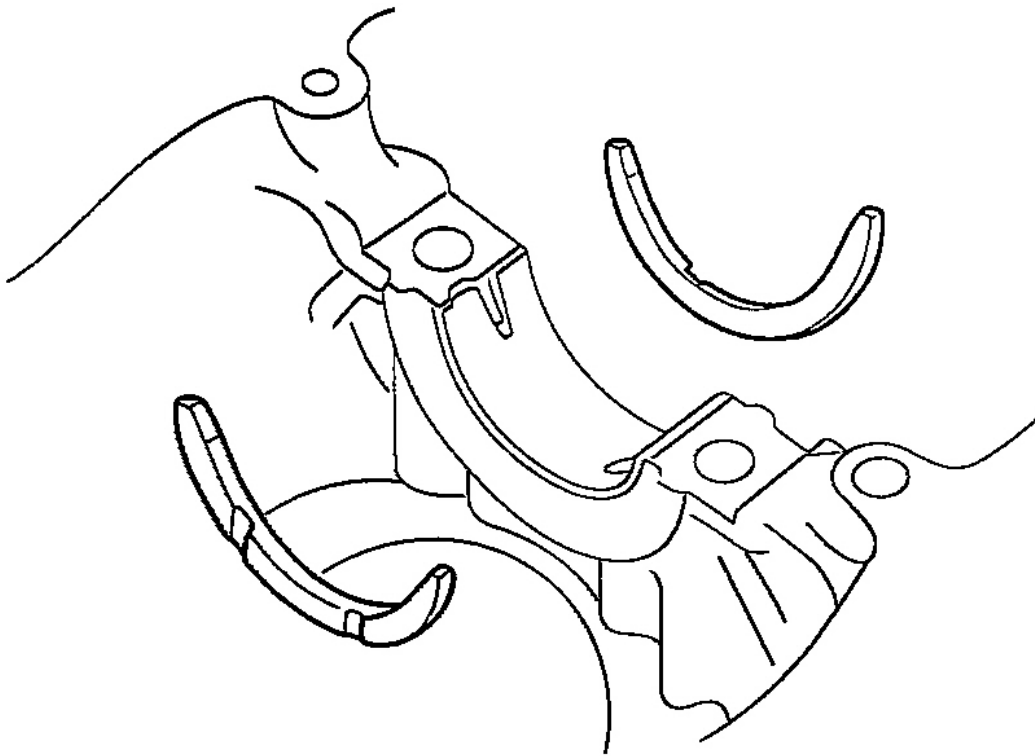

G00790071


Fig. 127: Installing Thrust Bearings
 Courtesy of HYUNDAI MOTOR CO.

4. Apply engine oil to journals and pins. Install the crankshaft.
5. Install the bearing caps with the arrow mark directed toward the front of the engine. The cap number must be correct.
6. Tighten the cap bolts to the specified torque.

Tightening torque

Main bearing cap bolts : 25 Nm (250 kg.cm, 18lb.ft) + (90°)


7. Cap bolts should be tightened evenly in 4 to 5 increments before they are tightened to the specified torque.
8. Make sure that the crankshaft turns freely and check the end play of the crankshaft.
9. Using a special tool (09231 - 21000). Install the oil seal in the oil seal case. A new oil seal should be used.

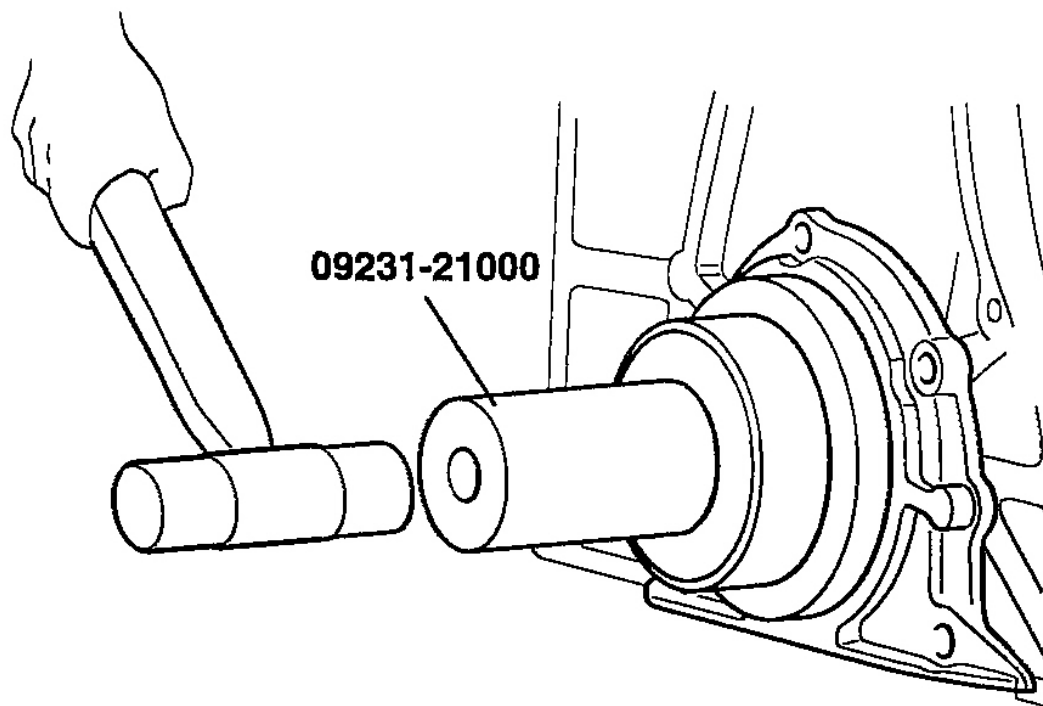

G00790072

Fig. 128: Installing Oil Seal In Case
Courtesy of HYUNDAI MOTOR CO.

10. Install the oil seal into the oil seal case so that the oil hole in the separator may be directed downward (arrow in illustration).

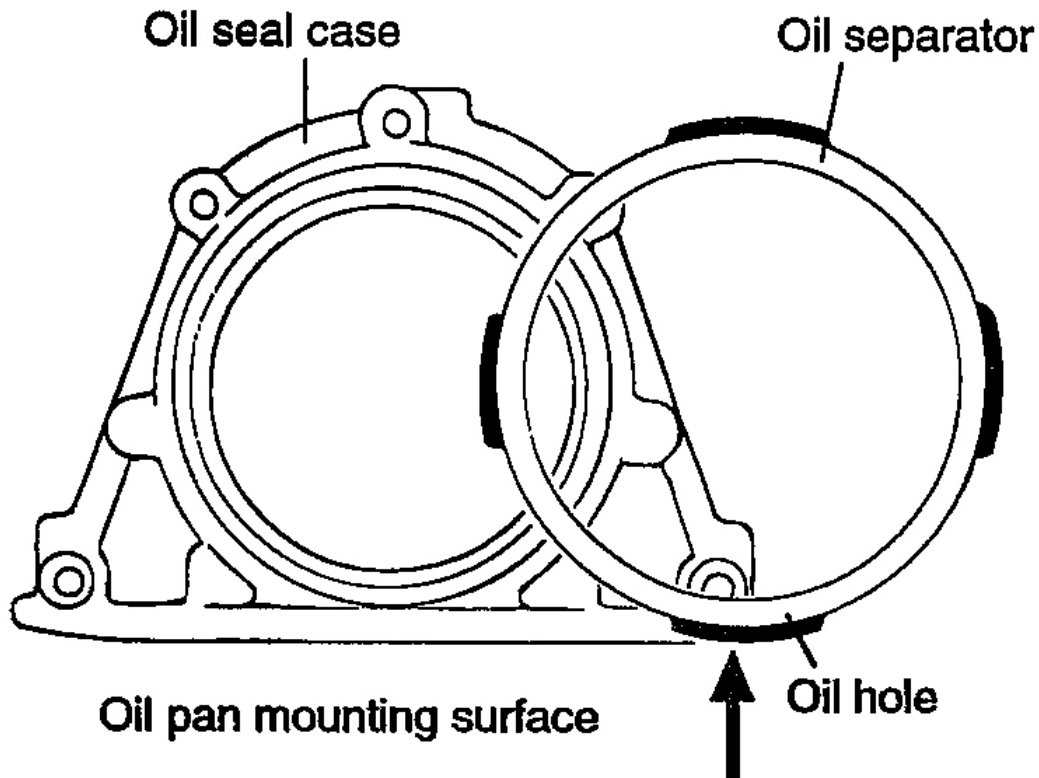

G00790073

Fig. 129: Identifying Oil Separator
Courtesy of HYUNDAI MOTOR CO.

11. Install the new oil seal case gasket and oil seal case assembly.

Tightening torque

Oil seal case : 10 ~ 12 Nm (100 ~ 120 kg.cm, 7 ~ 9 lb.ft)

(For M/T)

12. Install the rear plate to the cylinder block.
13. Install the flywheel assembly and tighten the bolts to the specified torque.

Tightening torque

Flywheel bolt :

130 ~ 140 Nm (1300 ~ 1400 kg.cm, 94 ~ 101 lb.ft)

(For A/T)

14. Install the adapter plate to the cylinder block.
15. Install the drive plate and tighten the bolts to the specified torque.


Tightening torque

Driver plate : 130 ~ 140 Nm (1300 ~ 1400 kg.cm, 94 ~ 101 lb.ft)

INTAKE AND EXHAUST SYSTEM

EXHAUST MANIFOLD

Components

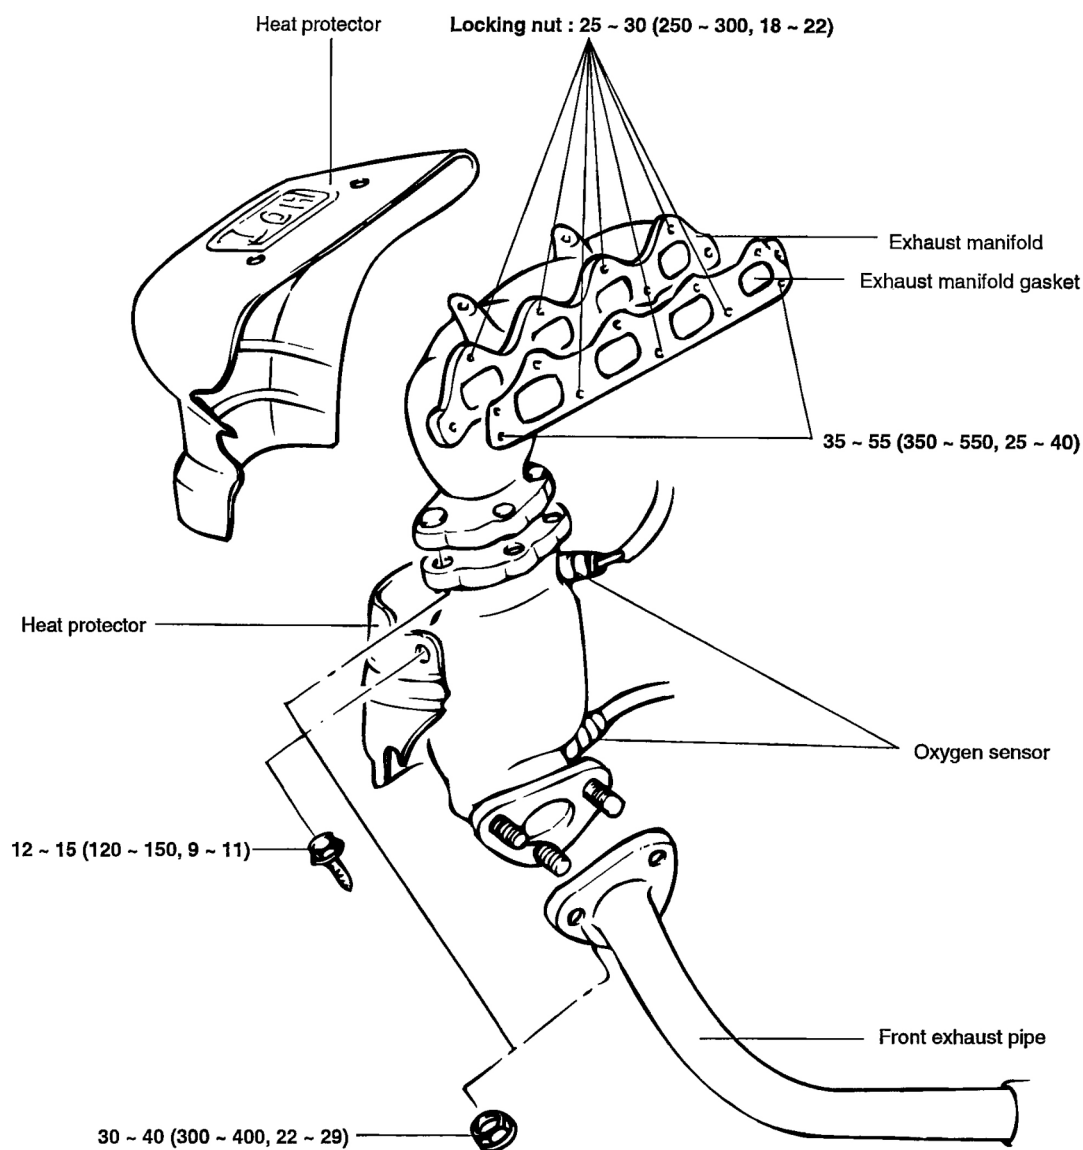

TORQUE : Nm (kg.cm, lb.ft)

G00790090

Fig. 130: Exhaust Manifold Components
Courtesy of HYUNDAI MOTOR CO.

Removal

1. Remove the heat protector.
2. Remove the exhaust manifold.
3. Remove the exhaust manifold gasket.

Inspection

1. Check for damage or cracking.
2. Using a straight edge and feeler gauge, check for distortion on the cylinder head matching surface.

Standard value : 0.15 mm (0.006 in.)

Service limit : 0.3 mm (0.012 in.)

3. Check the exhaust manifold for damage and cracking.

Installation

1. Install the exhaust manifold with its gasket.

Tightening torque


Exhaust manifold

M8 : 25 ~ 30 Nm (250 ~ 300 kg.cm, 18 ~ 22 lb.ft)

M10 : 35 ~ 35 Nm (350 ~ 550 kg.cm, 25 ~ 40 lb.ft)

NOTE: **Do not use the used exhaust manifold gasket.**

INTAKE MANIFOLD**Components**

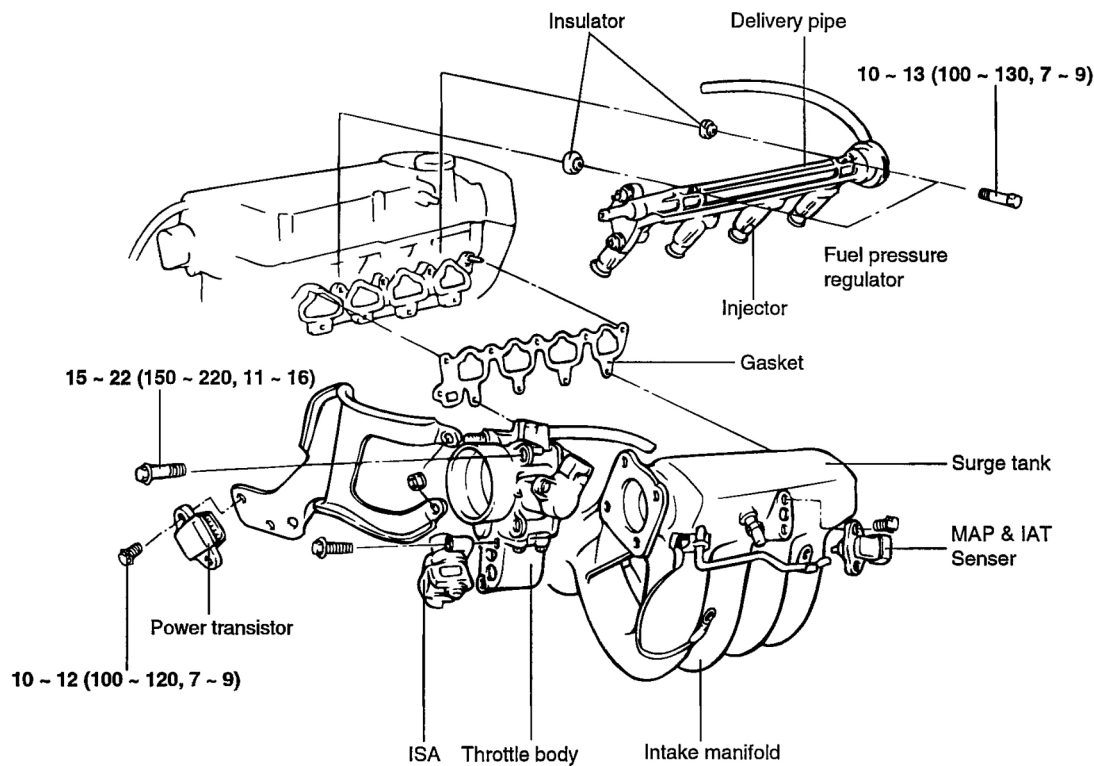


TORQUE : Nm (kg-cm, lb-ft)

G00790091

Fig. 131: Intake Manifold Components
Courtesy of HYUNDAI MOTOR CO.

Removal


1. Remove the air breather hose connected to the throttle body.

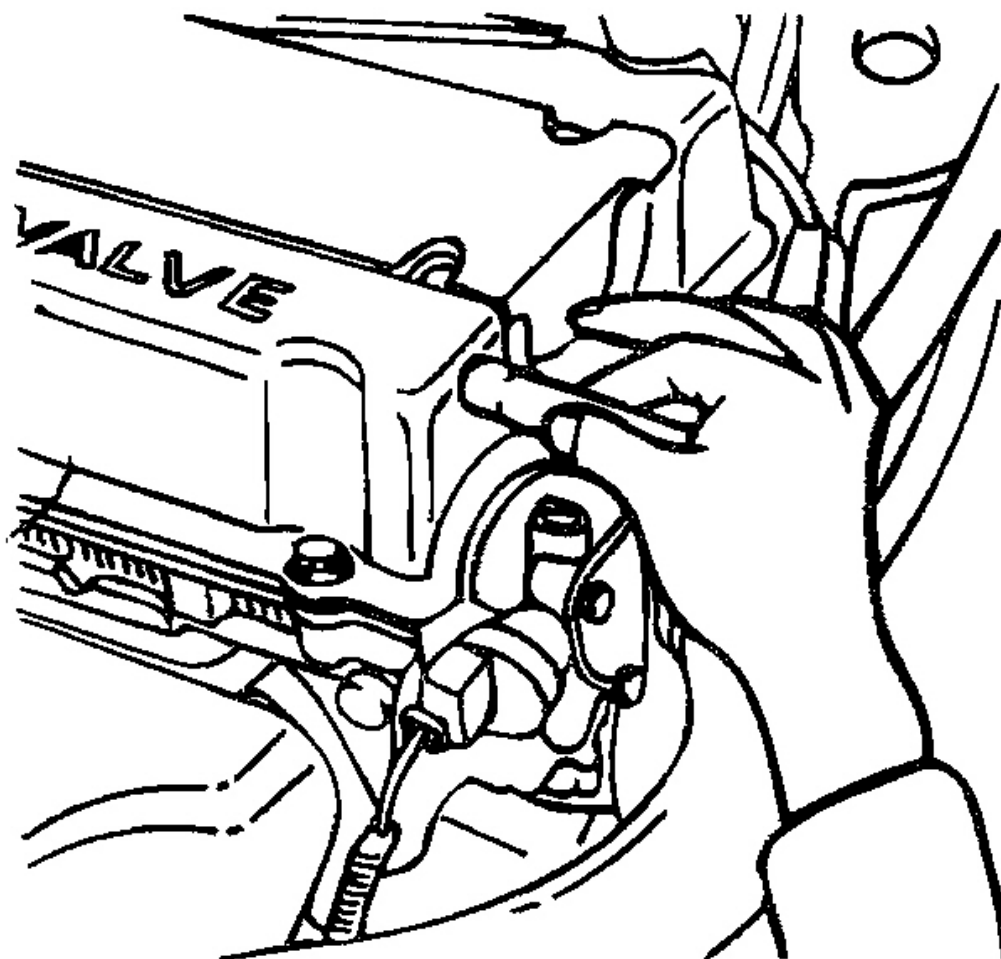

G00790092

Fig. 132: Removing Air Breather Hose
Courtesy of HYUNDAI MOTOR CO.


2. Remove the accelerator cable.

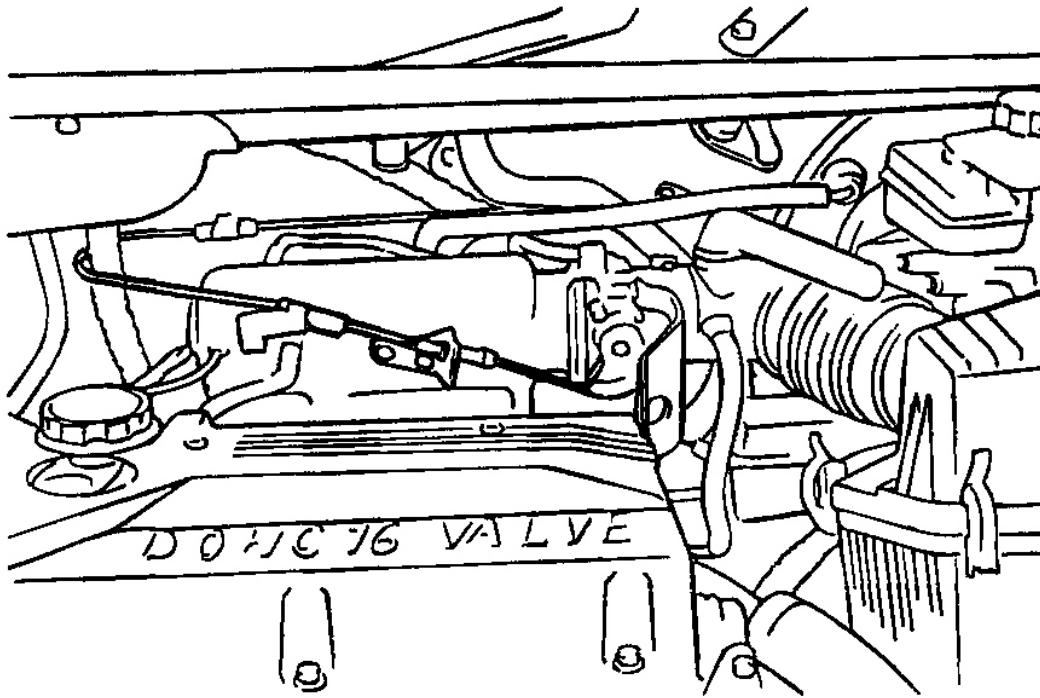

G00790093

Fig. 133: Identifying Accelerator Cable
Courtesy of HYUNDAI MOTOR CO.


3. Remove the engine coolant hose and throttle body.
4. Remove the P.C.V. valve and brake boost vacuum hose.

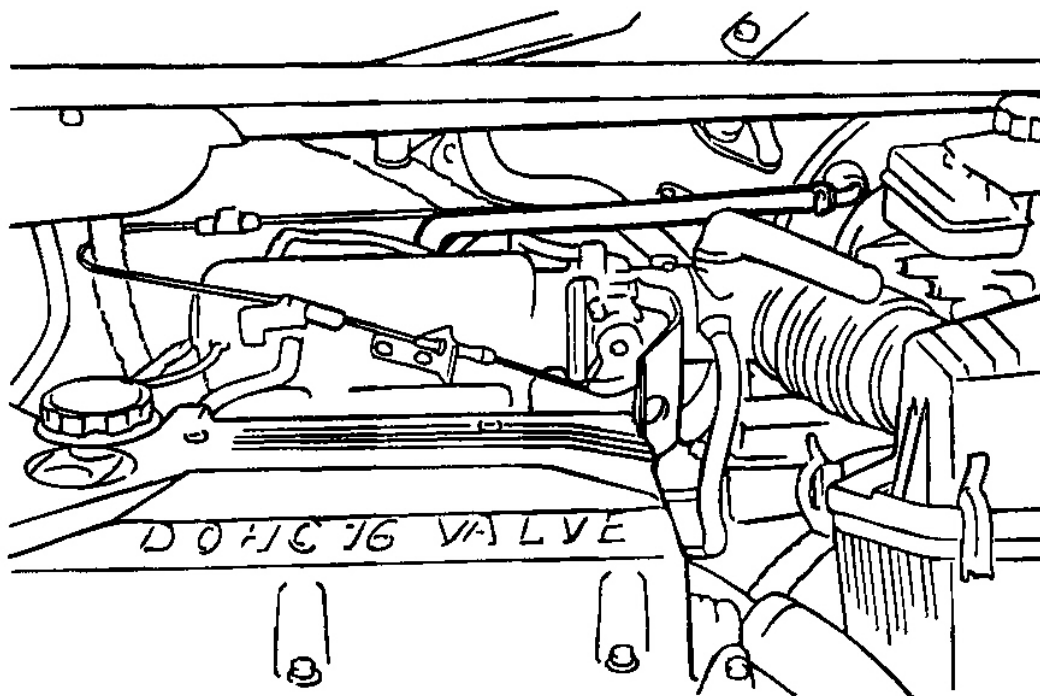

G00790094

Fig. 134: Identifying Brake Booster Vacuum Hose
Courtesy of HYUNDAI MOTOR CO.


5. Disconnect the vacuum hose connector.
6. Remove the injector cover.

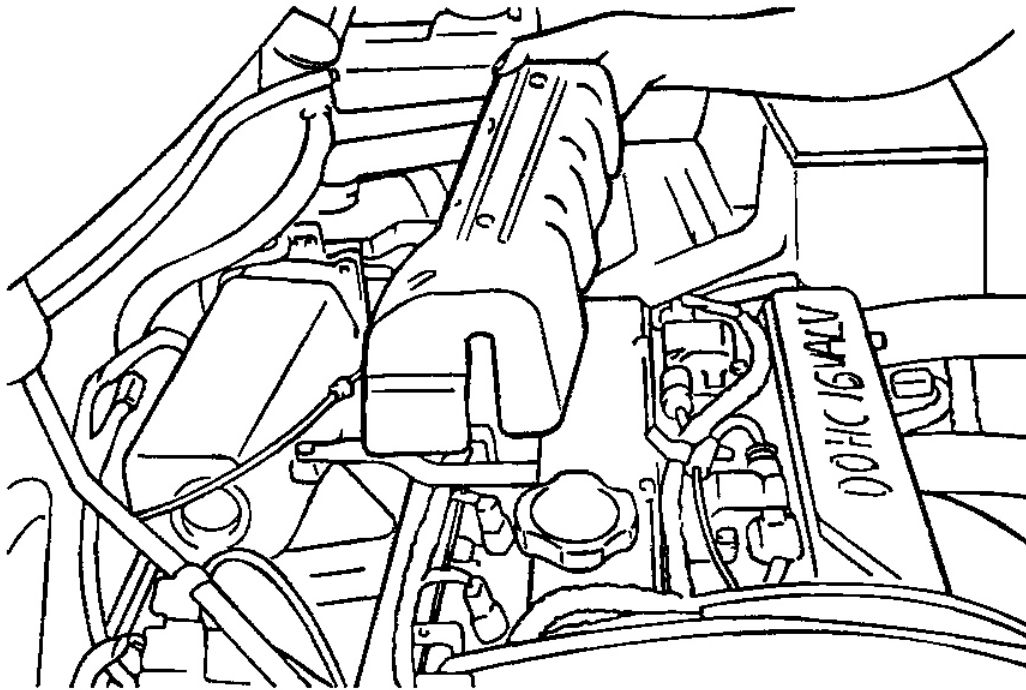

G00790095

Fig. 135: Removing Injector Cover
Courtesy of HYUNDAI MOTOR CO.

7. Bleed off pressure in the fuel pipe line to prevent fuel from spilling and then disconnect the high pressure hose.
8. Disconnect the fuel injector harness connector.

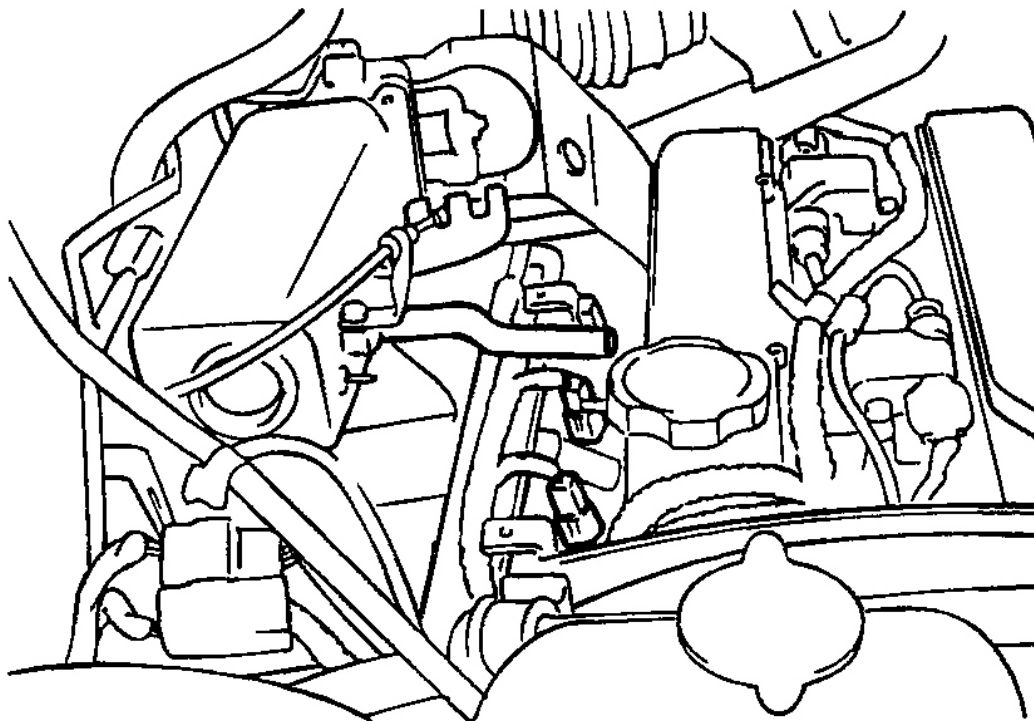


G00790096

Fig. 136: View Of Injector Harness Connector
Courtesy of HYUNDAI MOTOR CO.

9. Remove the delivery pipe with fuel injectors and the pressure regulator.


NOTE: When the delivery pipe is removed, do not drop the injectors.

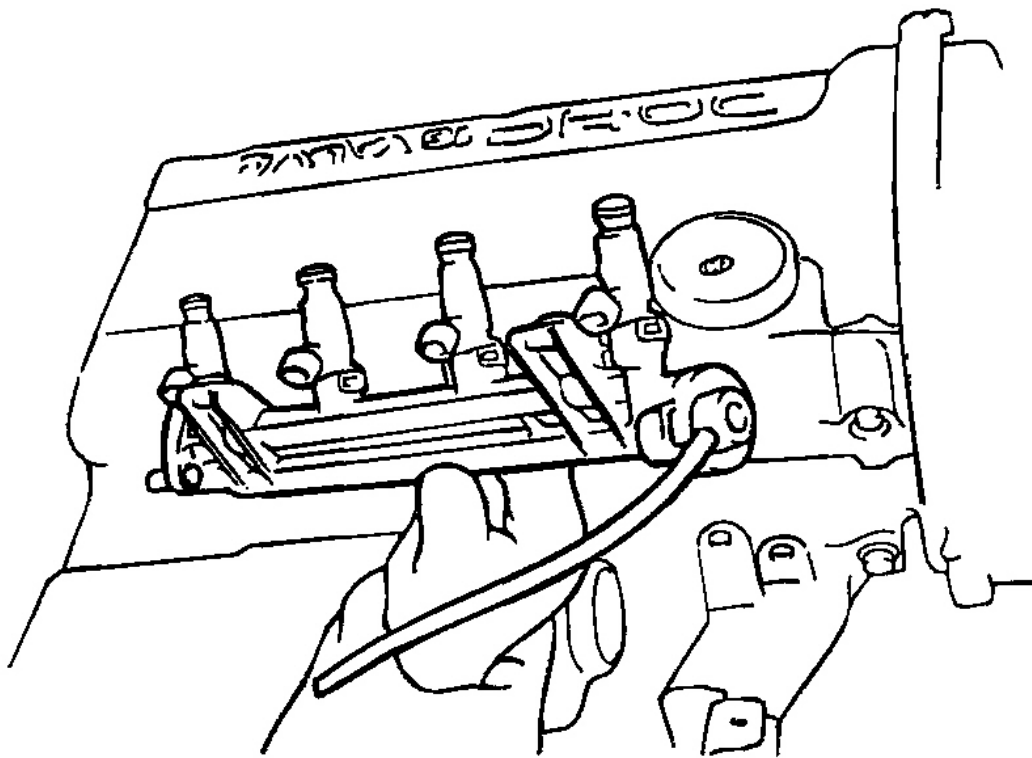

G00790097

Fig. 137: Removing Fuel Delivery Pipe
Courtesy of HYUNDAI MOTOR CO.

10. Remove the intake manifold stay.

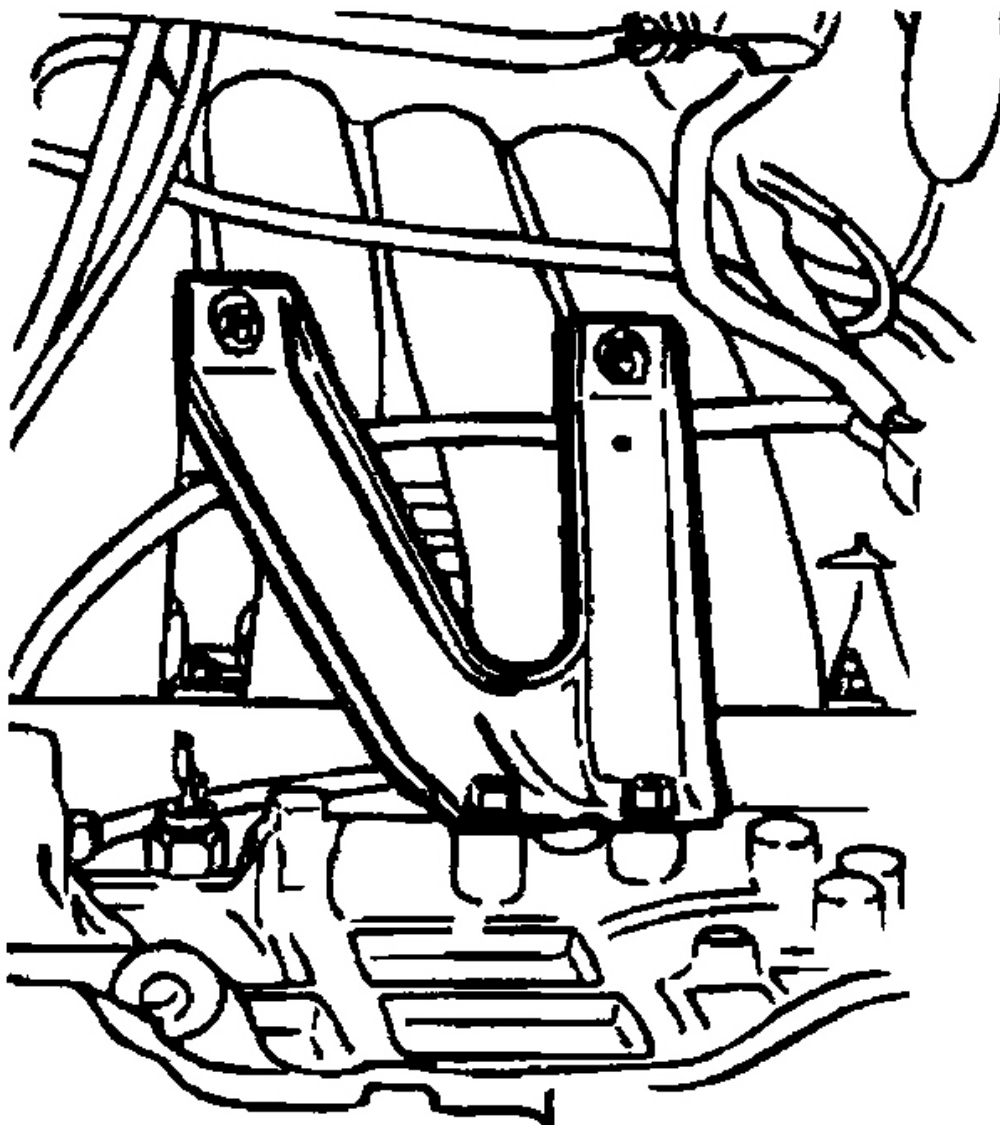

G00790098

Fig. 138: Identifying Intake Manifold Stay
Courtesy of HYUNDAI MOTOR CO.

11. Remove the intake manifold.

Inspection

Intake Manifold & Surge Tank

1. Check the parts for damage or cracking.
2. Check for restrictions in the vacuum outlet port, water or gas passages.
3. Check for flatness using a straight edge and feeler gauge.

Standard value : 0.15 mm (0.06 in.) or less

Service limit : 0.2 mm (0.0078 in.)

Installation

1. Install the intake manifold and new gasket to the specified torque.

Tightening torque


Intake manifold

Bolt : 15 ~ 20 Nm (150 ~ 120 kg.cm, 11 ~ 14 lb.ft)

Nut : 30 ~ 42 Nm (300 ~ 420 kg.cm, 22 ~ 30 lb.ft)

2. Install the delivery pipe and injector assembly to the intake manifold.


NOTE: **Make certain that there is no interferences between the injectors and injector ports on the intake manifold.**

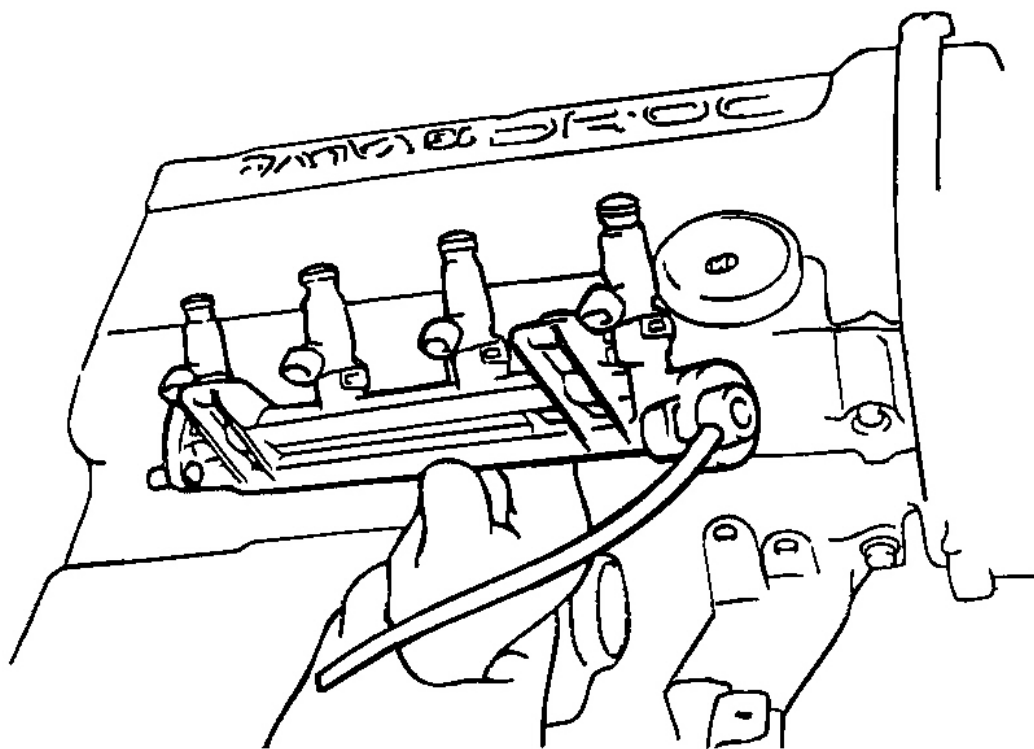

G00790099

Fig. 139: Installing Fuel Delivery Pipe
Courtesy of HYUNDAI MOTOR CO.

3. Install the surge tank stay.
4. Connect the fuel injector connector and wiring harness and then install the cover.
5. Connect the high pressure hoses.

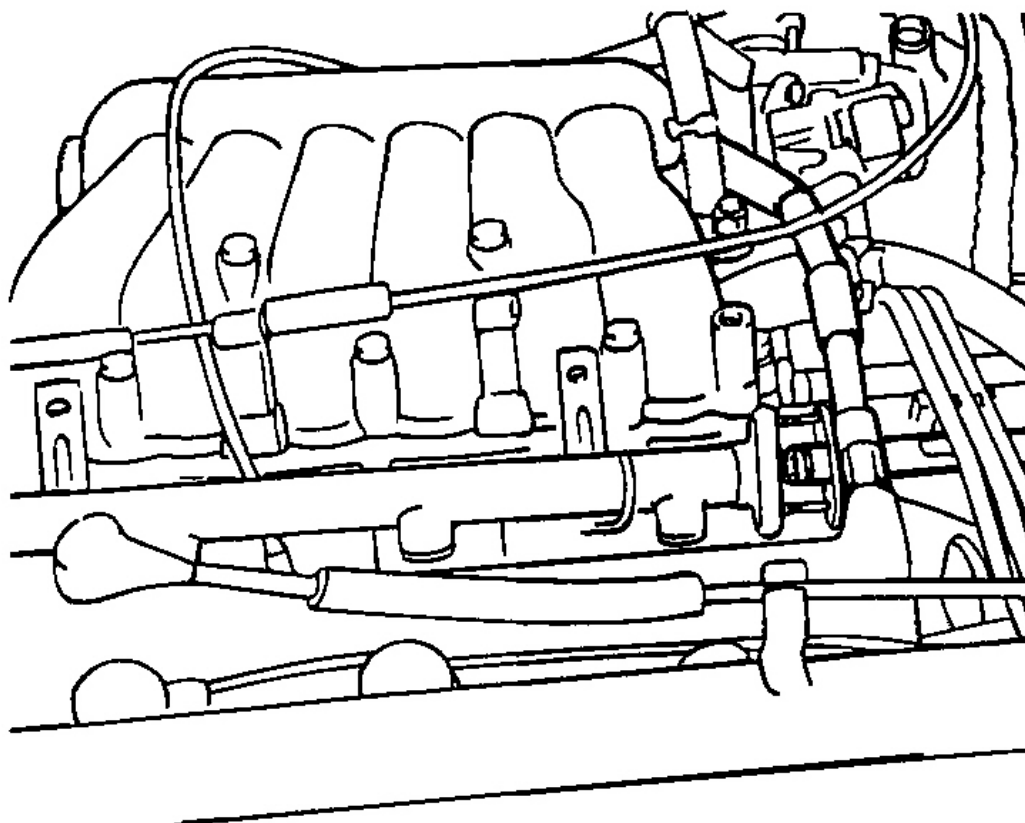

G00790100

Fig. 140: Identifying High Pressure Hose
Courtesy of HYUNDAI MOTOR CO.

6. Connect the vacuum hoses.

Tightening torque


Intake manifold stay and cylinder block :

18 ~ 25 Nm (180 ~ 250 kg.cm, 13 ~ 18 lb.ft)

7. Connect the PCV valve and brake boost hoses.
8. Install the air breather hose.
9. Install the accelerator cable.

MUFFLER

Components

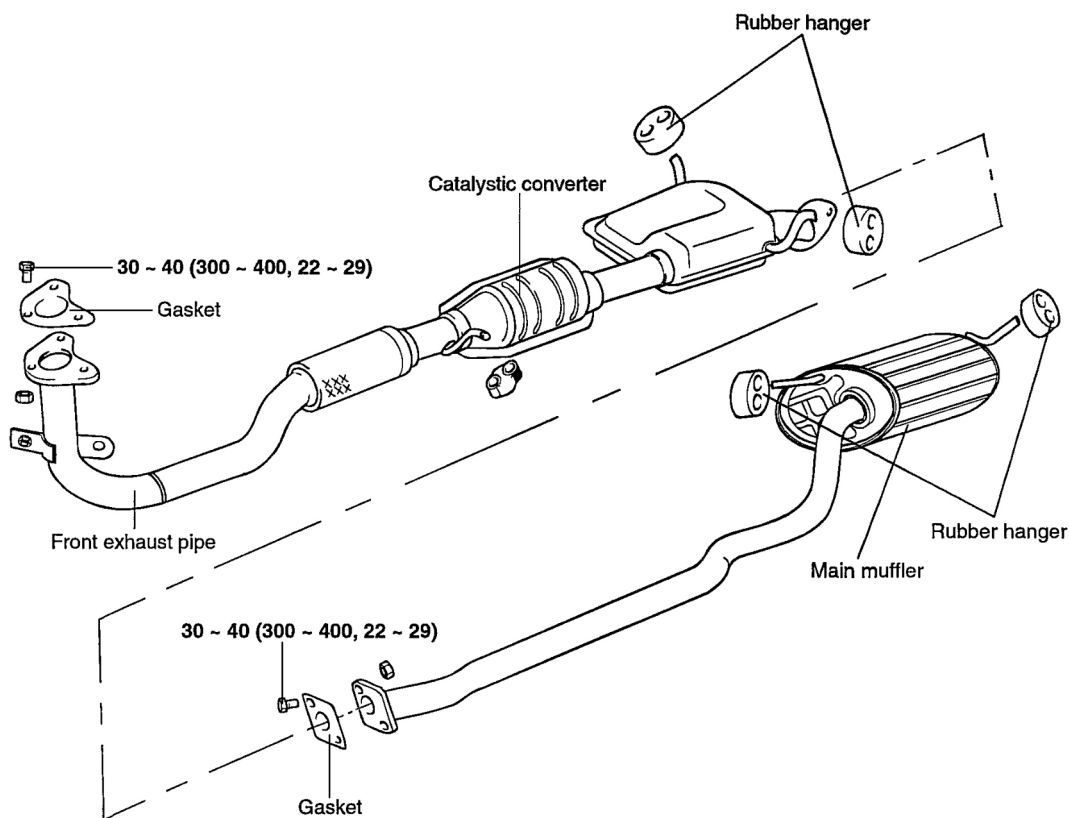

TORQUE : N·m (kg·cm, lb·ft)

G00790101


Fig. 141: Muffler Components
Courtesy of HYUNDAI MOTOR CO.

Removal

Main Muffler

CAUTION: Before removing or inspecting the exhaust system, ensure that the exhaust system is cool.


1. Disconnect the main muffler from the center exhaust pipe.

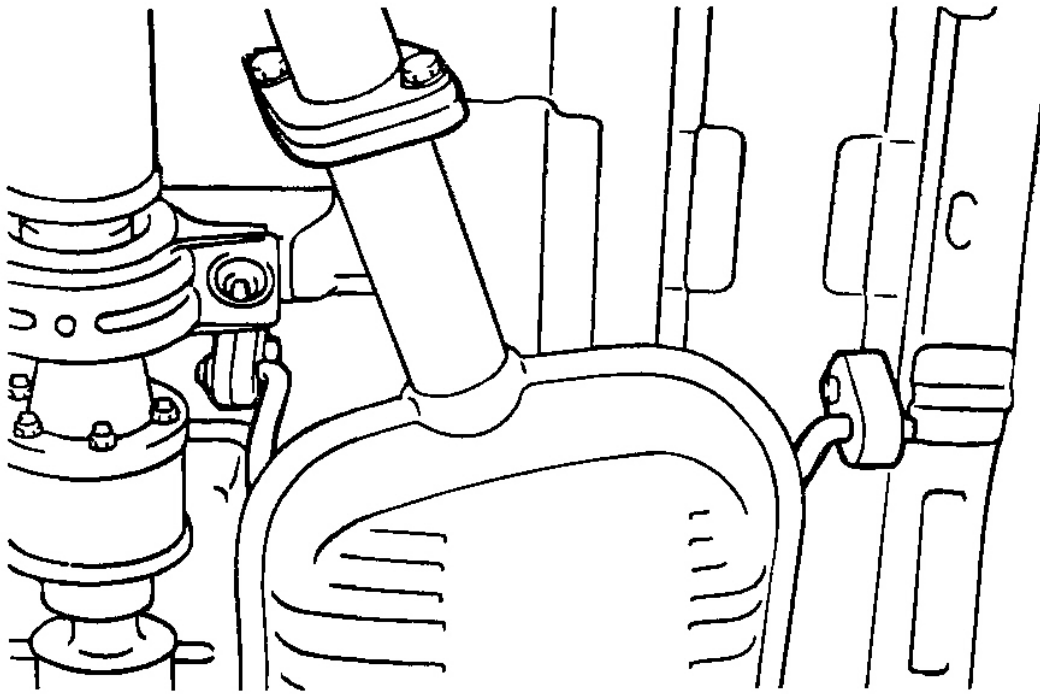

G00790102


Fig. 142: View Of Exhaust Muffler
Courtesy of HYUNDAI MOTOR CO.

2. Remove the rubber hangers and remove the main muffler.

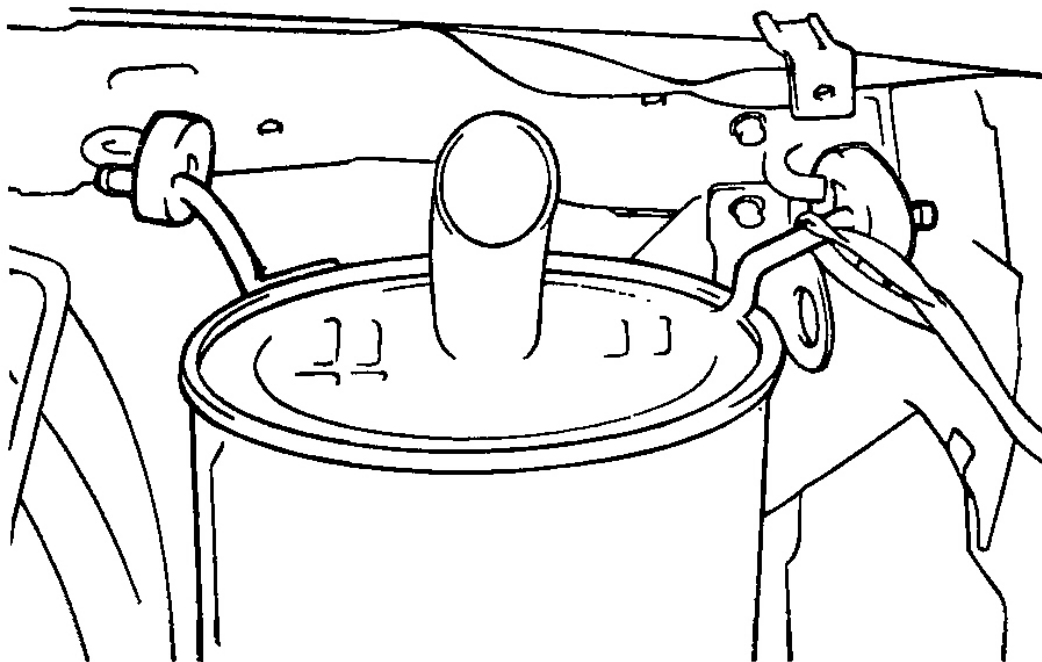

G00790103

Fig. 143: View Of Muffler Hangers
Courtesy of HYUNDAI MOTOR CO.

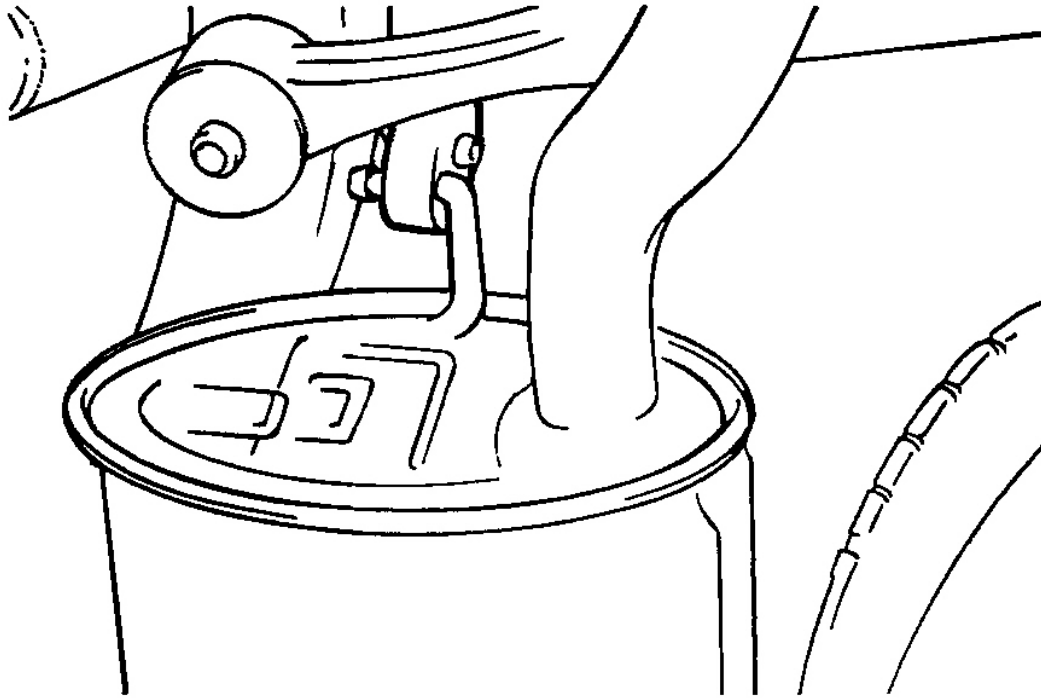


G00790104

Fig. 144: View Of Muffler Hangers
Courtesy of HYUNDAI MOTOR CO.

FRONT EXHAUST PIPE (INCLUDING CATALYTIC CONVERTER)


1. Remove the front exhaust pipe from the center exhaust pipe.
2. Remove the front exhaust pipe bolts and exhaust manifold pipe mounting nuts.

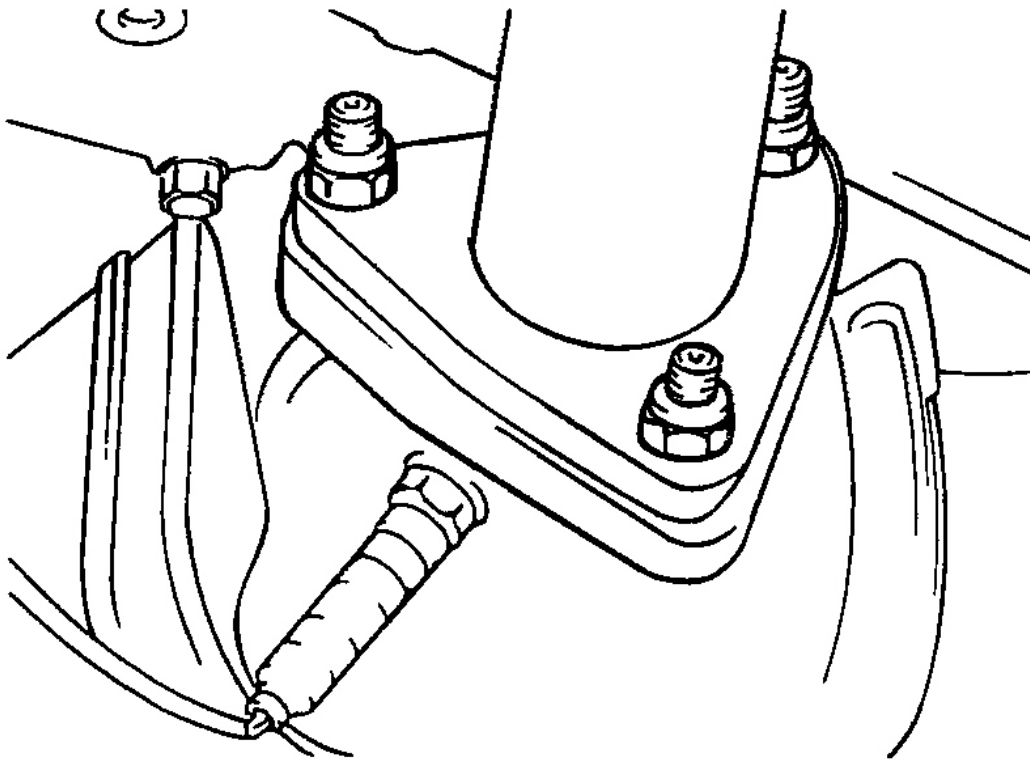

G00790105


Fig. 145: View Of Exhaust Pipe
Courtesy of HYUNDAI MOTOR CO.

3. Remove the front exhaust pipe from the rubber hanger.

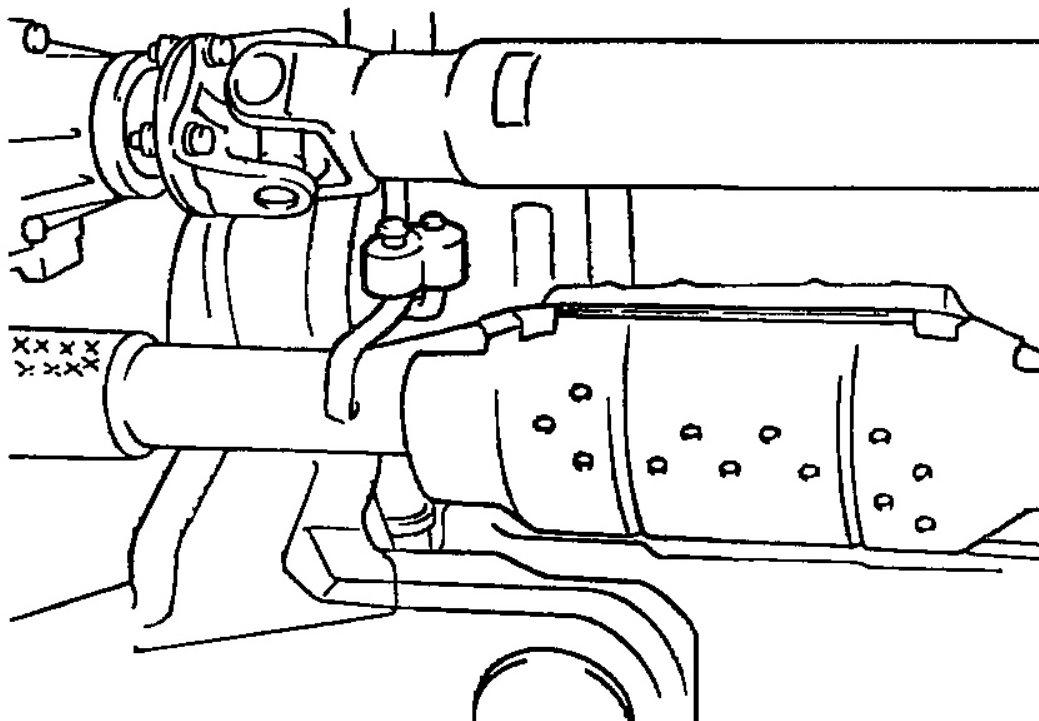

G00790106

Fig. 146: View Of Front Exhaust Pipe & Rubber Hanger
Courtesy of HYUNDAI MOTOR CO.

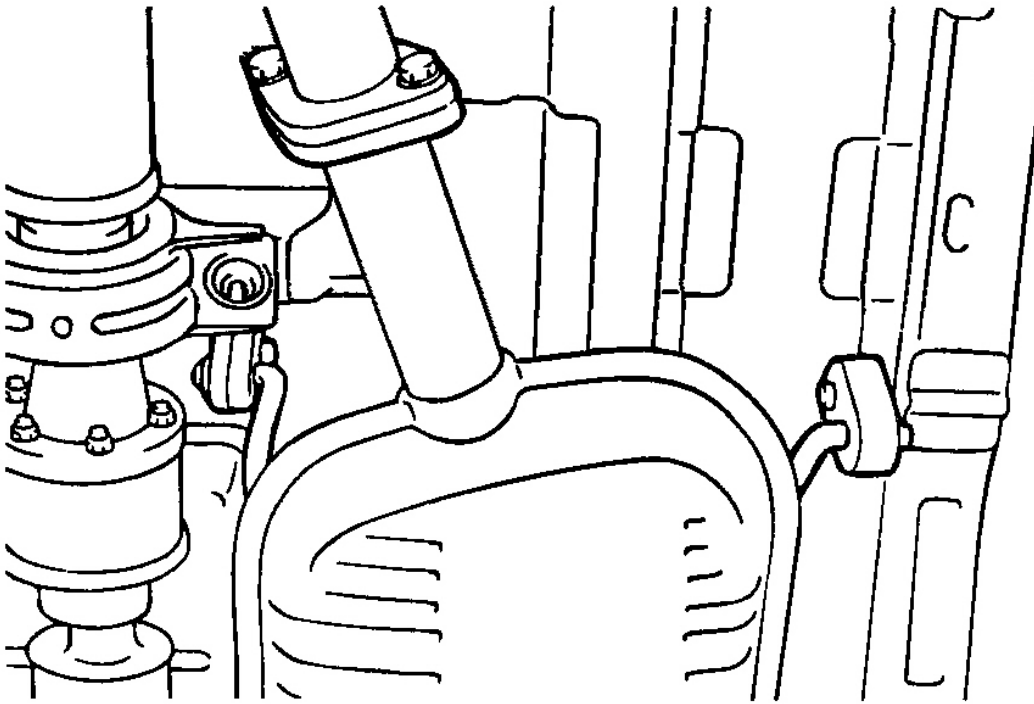

G00790107

Fig. 147: View Of Front Exhaust Pipe & Rubber Hangers
Courtesy of HYUNDAI MOTOR CO.

Inspection


1. Check the mufflers and pipes for leaks, corrosion and damage.
2. Check the rubber hangers for deterioration and cracks.

Installation

1. Temporarily install the front exhaust pipe (catalytic converter assembly), the center exhaust pipe and the main muffler in this order.
2. Install the rubber hangers so that they hang equally (left and right).
3. Tighten the parts securely and then confirm that there is no interference with any of components.

AIR CLEANER (ACL)

Components

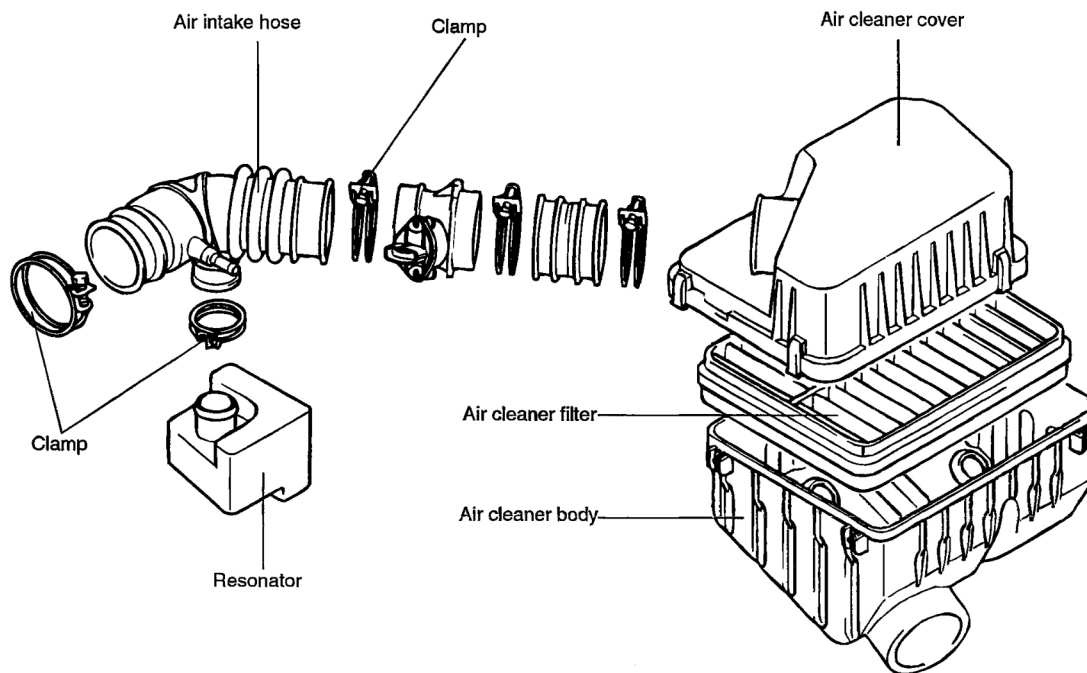


G00790108

Fig. 148: Air Cleaner Components
Courtesy of HYUNDAI MOTOR CO.

Removal

1. Disconnect the air flow sensor connector.
2. Remove the air intake hose at the air cleaner and the resonator.
3. Remove the three bolts attaching the air cleaner mounting brackets.
4. Detach the air cleaner.

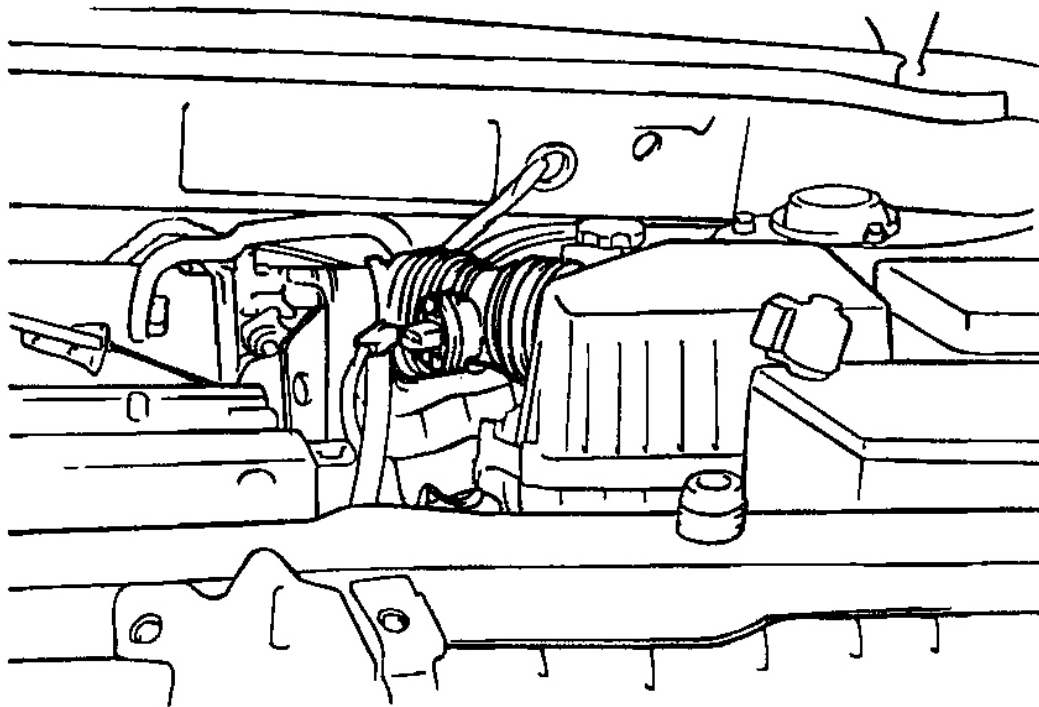

G00790109


Fig. 149: View Of Air Cleaner
Courtesy of HYUNDAI MOTOR CO.

5. Remove the air flow sensor from the air intake hose.

CAUTION: Do not pull on the air flow sensor wires.

Inspection


1. Check the air cleaner body, cover, or filter for distortion, corrosion or damage.
2. Check the air duct for damage.

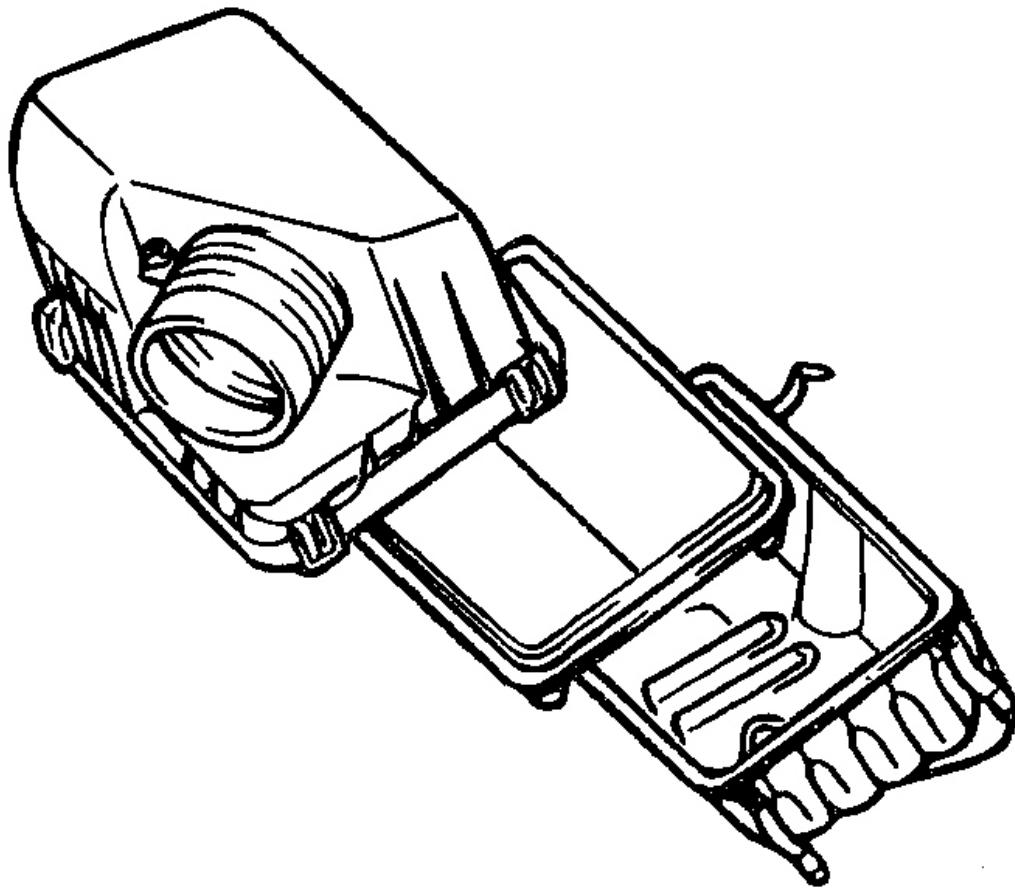

G00790110

Fig. 150: Identifying Air Cleaner Cover Assembly
Courtesy of HYUNDAI MOTOR CO.

3. Check the air cleaner element for restriction, contamination or damage. If the element is slightly restricted, remove the dust and debris by blowing compressed air from the inside of the element.

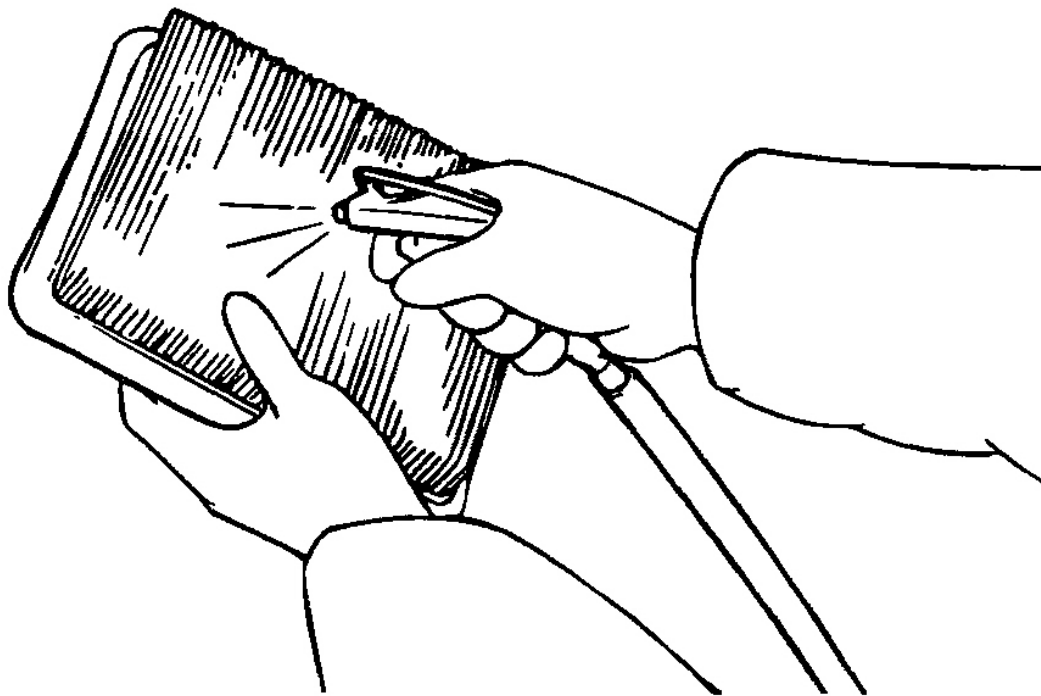

G00790111

Fig. 151: Cleaning Air Filter

Courtesy of HYUNDAI MOTOR CO.


Installation

Install the air cleaner assembly following the reverse order of removal.

CYLINDER HEAD ASSEMBLY

CYLINDER HEAD

Components

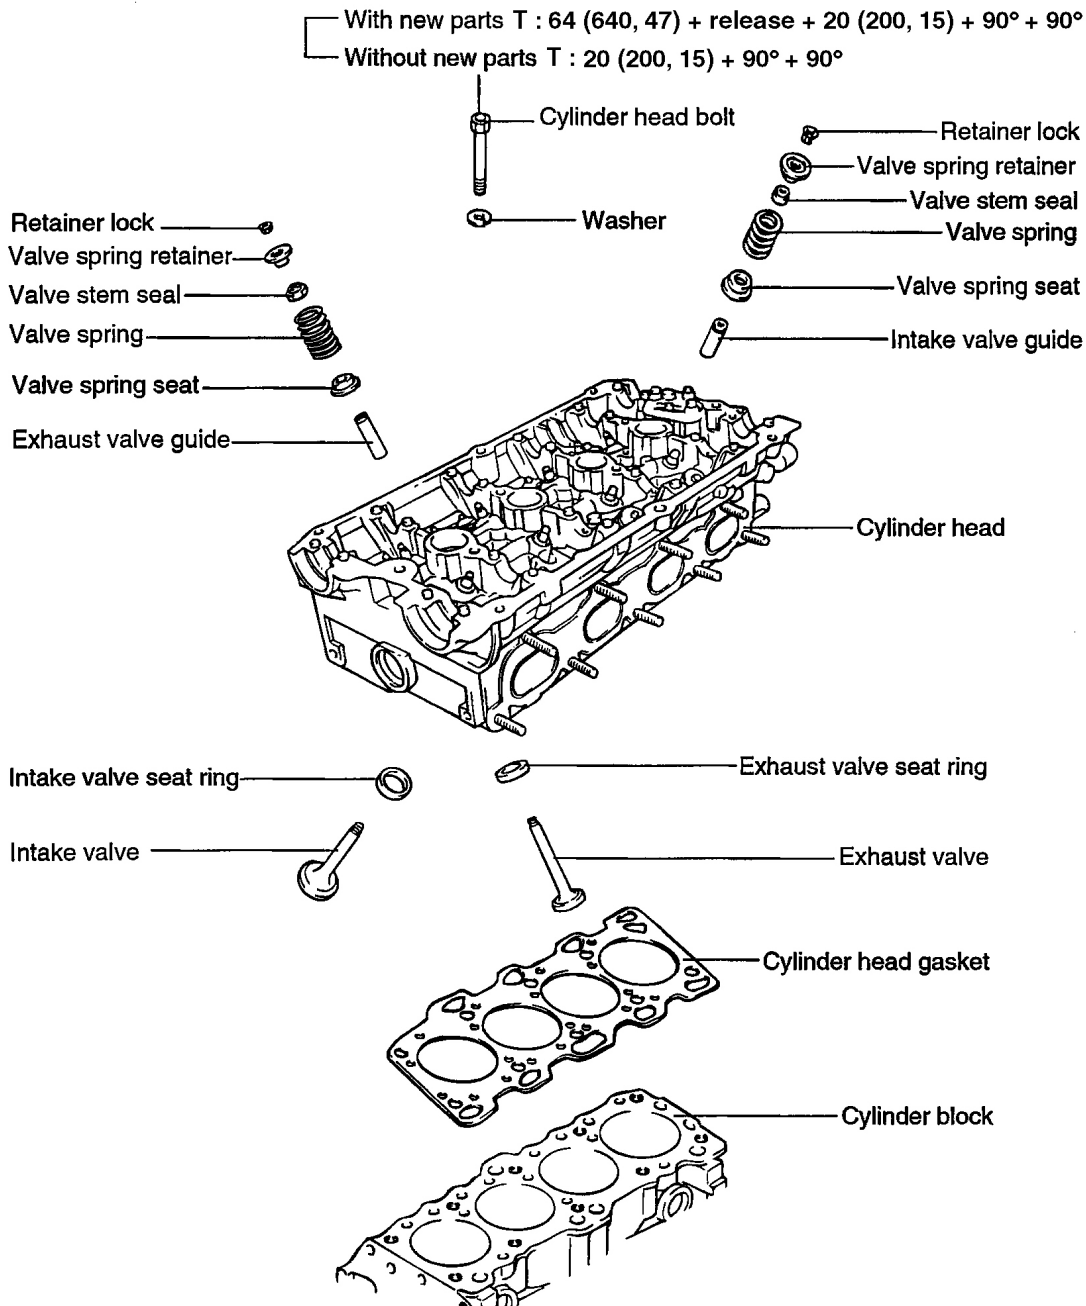

TORQUE : Nm (kg·cm, lb·ft)



G00790112

Fig. 152: Cylinder Head Components
Courtesy of HYUNDAI MOTOR CO.

Disassembly

1. Using a tool, remove the cylinder head bolts in the order shown in the illustration.

← Camshaft sprocket side

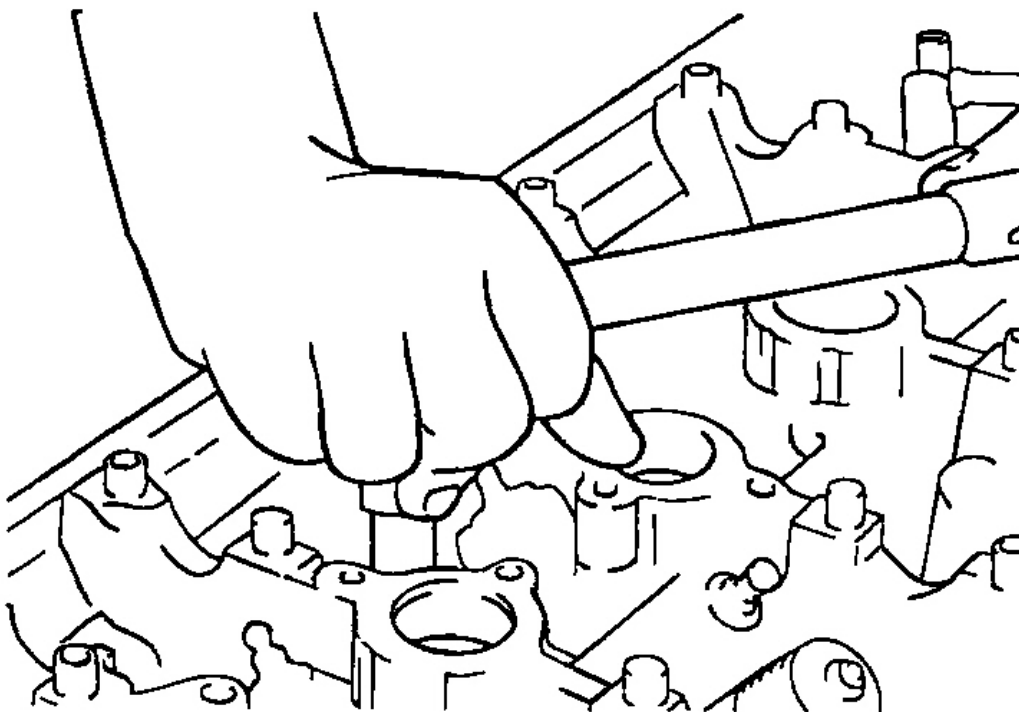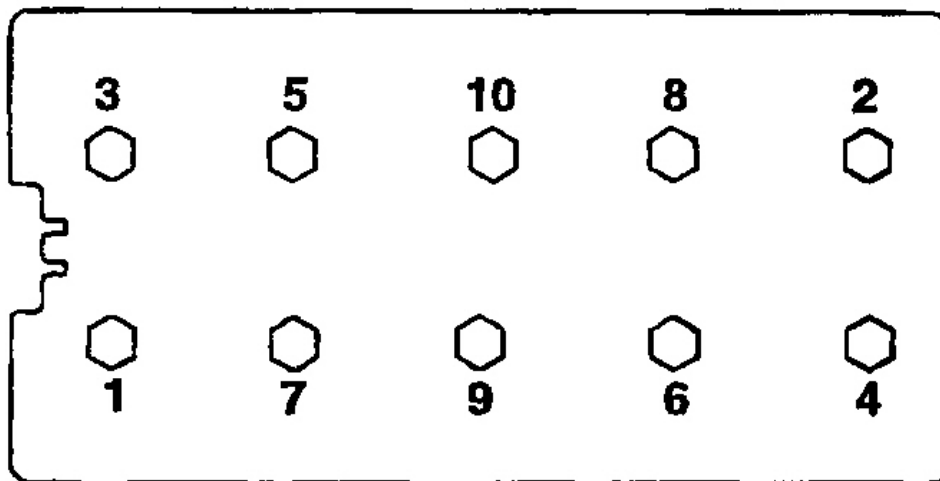


G00790113

Fig. 153: Cylinder Head Bolt Removal Sequence

Courtesy of HYUNDAI MOTOR CO.

2. Using the special tool (09222-28000, 09222-28100), remove the valve spring retainer lock. Then remove the spring retainer, valve spring, spring seat and valve.

NOTE: Arrange these parts so that they can be reinstalled in their original positions.

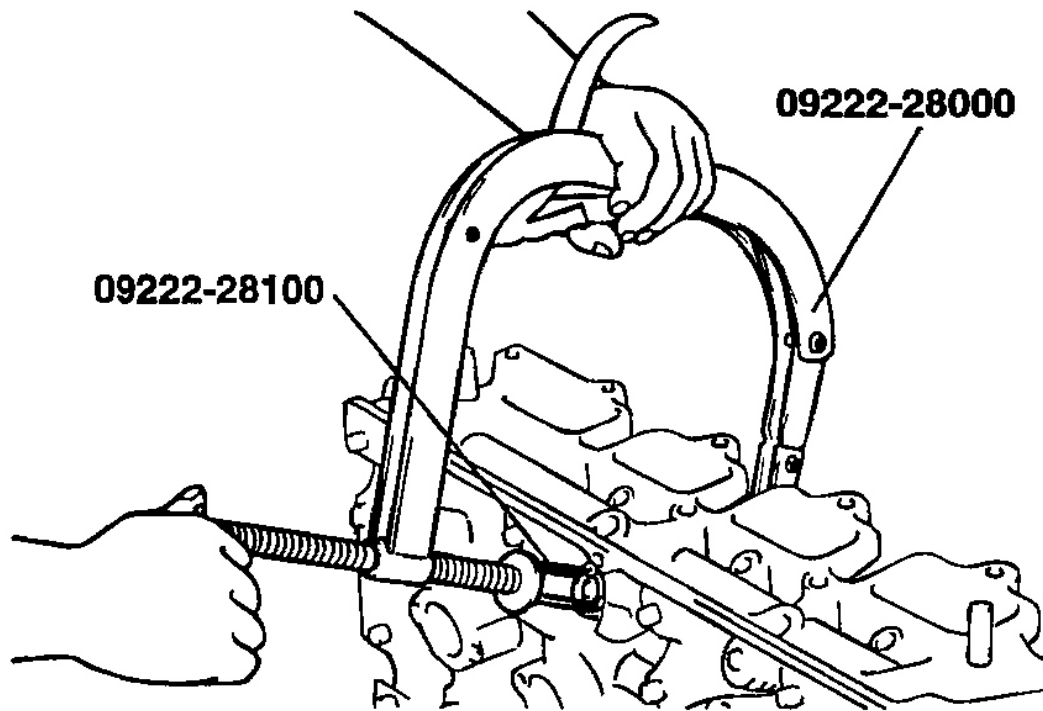

G00790114

Fig. 154: Removing Valve Spring Retainer Locks

Courtesy of HYUNDAI MOTOR CO.

3. Remove the valve stem seals with pliers.

NOTE: Do not reuse the valve stem seals.




G00790115

Fig. 155: Removing Valve Stem Seals
Courtesy of HYUNDAI MOTOR CO.

Inspection

1. Check the cylinder head for cracks, damage and coolant leakage. If cracked, replace the cylinder head.
2. Remove scale, sealing compound and carbon deposits completely. After cleaning the oil passages, apply compressed air to verify that the passages are not clogged.

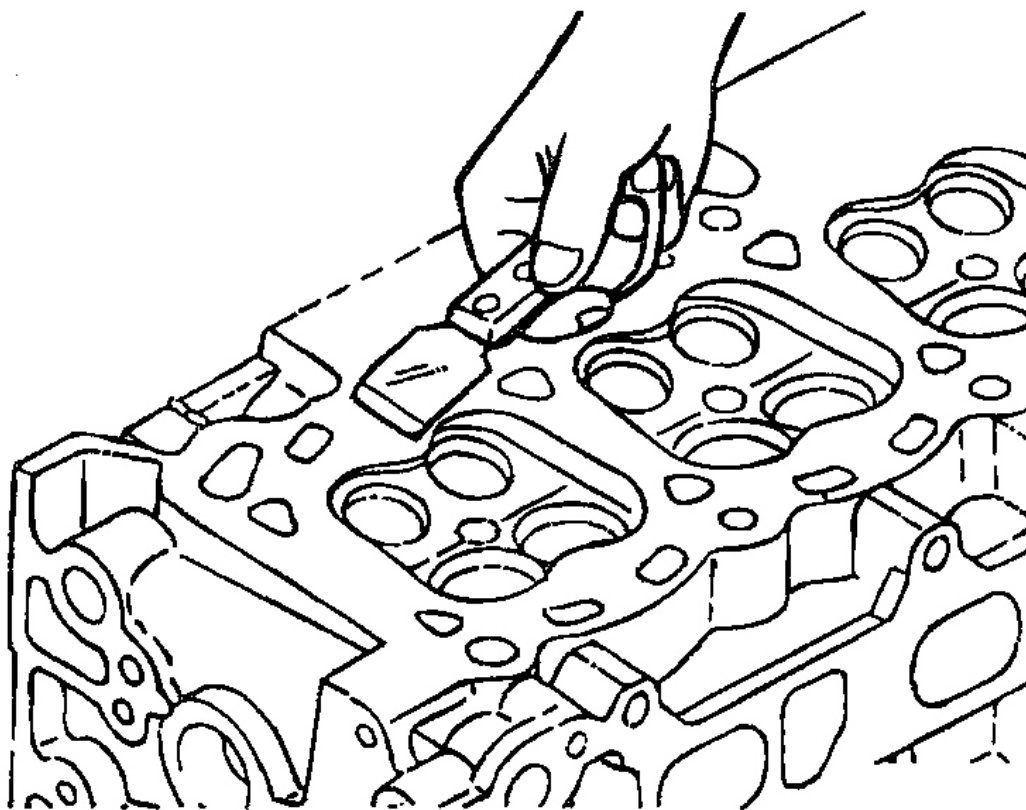

G00790116


Fig. 156: Cleaning Cylinder Head Surface
Courtesy of HYUNDAI MOTOR CO.

3. Check the cylinder head surface for flatness in the direction as shown in the illustration. If flatness exceeds service limit in any direction, either replace the cylinder head or machine the cylinder head matching surface lightly.

Flatness of cylinder head gasket surface

Standard : Less than 0.03 mm (0.0012 in.)

Limit : 0.2 mm (0.008 in.)

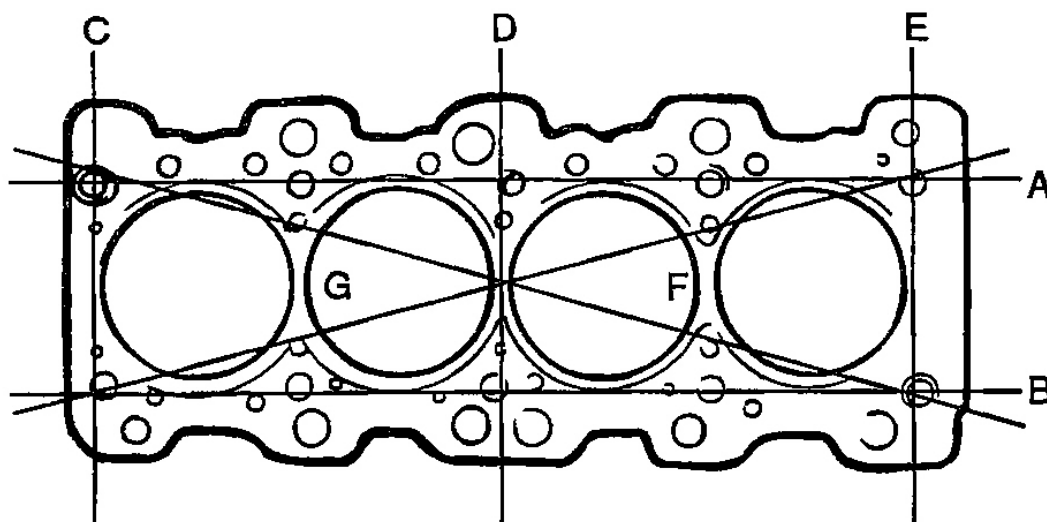


G00790117

Fig. 157: Checking Cylinder Head Flatness
Courtesy of HYUNDAI MOTOR CO.

Valves

1. Using a wire brush, clean the valve thoroughly.

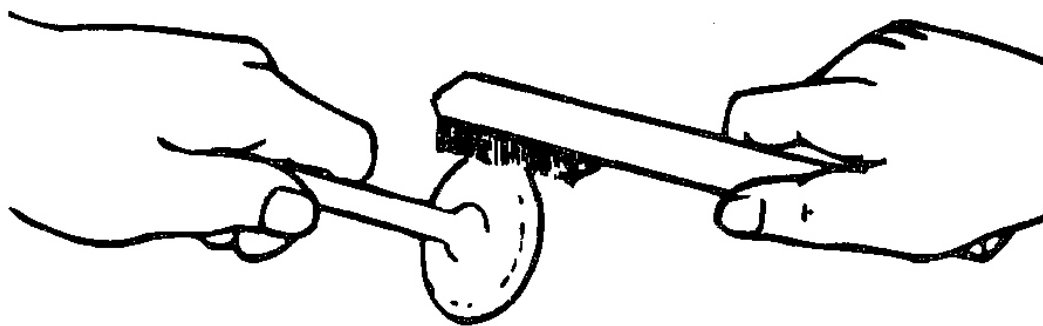

G00790118

Fig. 158: Cleaning Valve
Courtesy of HYUNDAI MOTOR CO.

2. Check each valve for wear, damage and distortion of the head and the stem at B Position. Replace, if necessary. If stem end is hollowed out or worn, resurface as necessary. This correction must be limited to

a minimum. Also resurface the valve face.

Replace the valve if the margin has decreased to less than the service limit.

Margin**[Standard]**


Intake : 1.0 mm (0.040 in.)

Exhaust : 1.5 mm (0.059 in.)

[Limit]

Intake : 0.7 mm (0.028 in.)

Exhaust : 1.0 mm (0.040 in.)

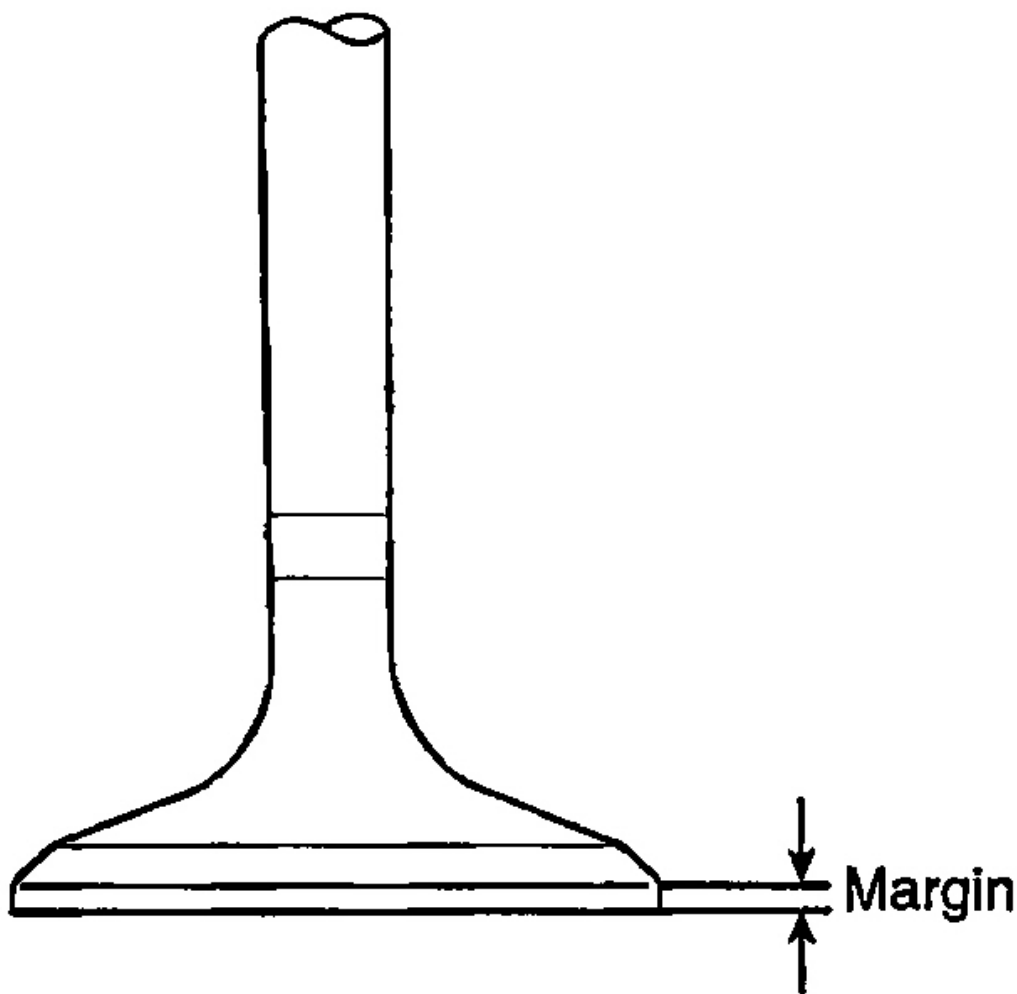

G00790119

Fig. 159: Identifying Valve Margin
Courtesy of HYUNDAI MOTOR CO.

Valve Springs

1. Check the free height of each valve spring. If they exceed the service limit, replace the springs.
2. Using a square, test the squareness of each spring. If a spring is excessively out-of-square, replace it.

Valve spring

[Standard]

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Free height : 45.82 mm (1.804 in.)


Load : 23.3kg / 40 mm (55.8 lb / 1.57 in.)

Out of square : 1.5° or less

[Limit]

Free height : 44.82 mm (1.7646 in.)

Out of square : 4°

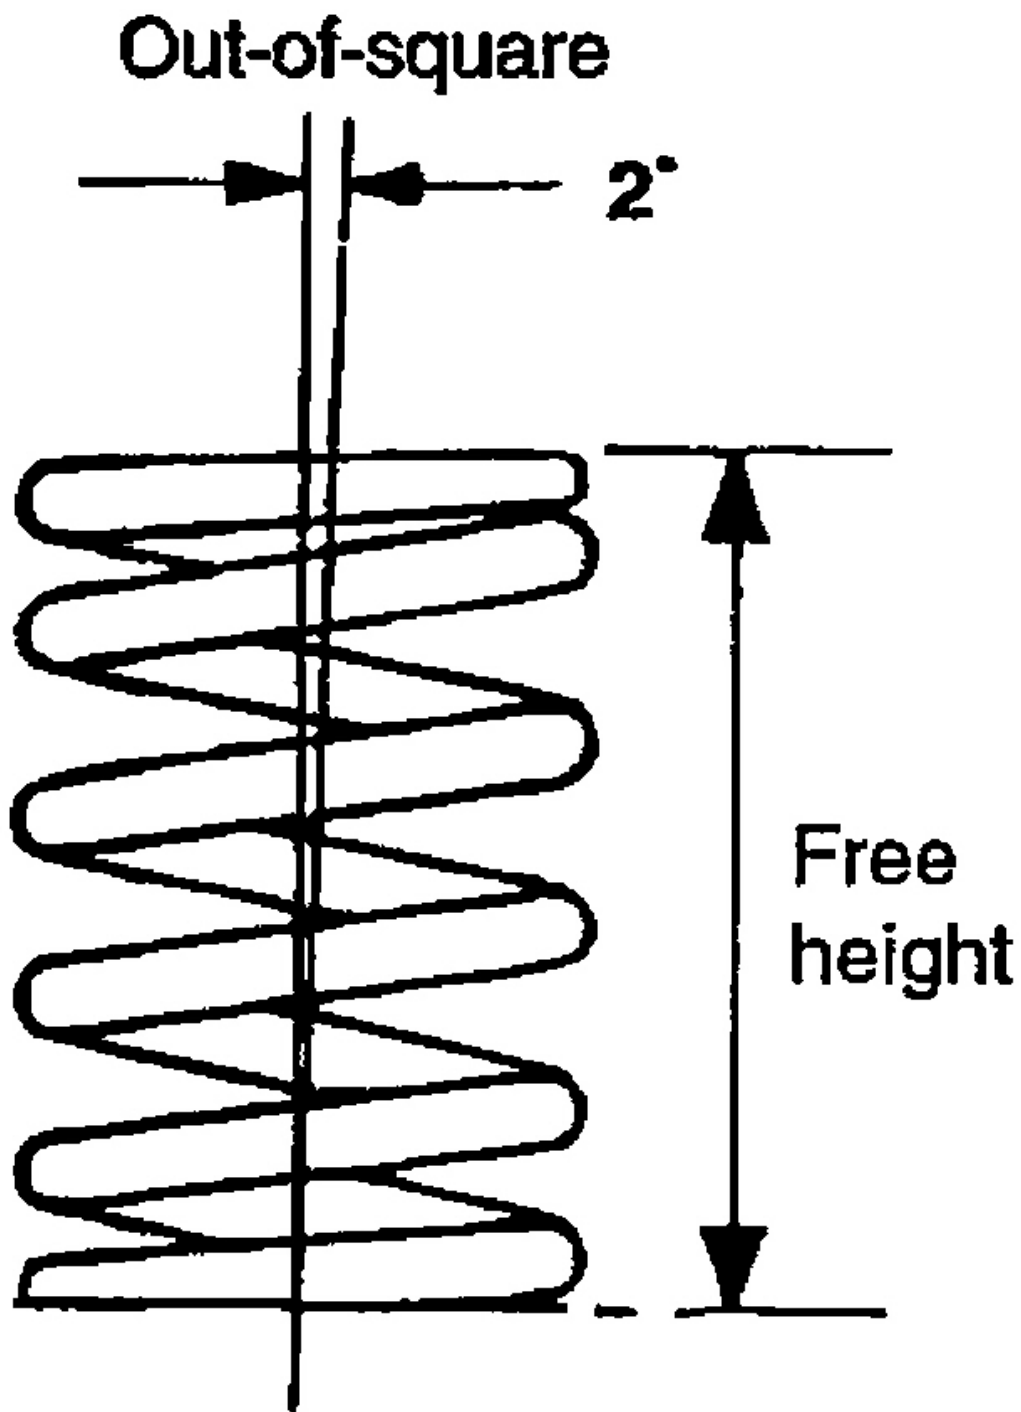

G00790120

Fig. 160: Checking Valve Spring**Courtesy of HYUNDAI MOTOR CO.****Valve Guides**

Check the valve stem-to-guide clearance. If the clearance exceeds the service limit, replace the valve guide with the next oversize part.

Valve stem-to-guide clearance

[Standard]



Intake : 0.020 ~ 0.047 mm (0.0008 ~ 0.0020 in.)

Exhaust : 0.050 ~ 0.085 mm (0.0020 ~ 0.0033 in.)

[Limit]


Intake : 0.1 mm (0.0040 in)

Exhaust : 0.15 mm (0.0059 in.)

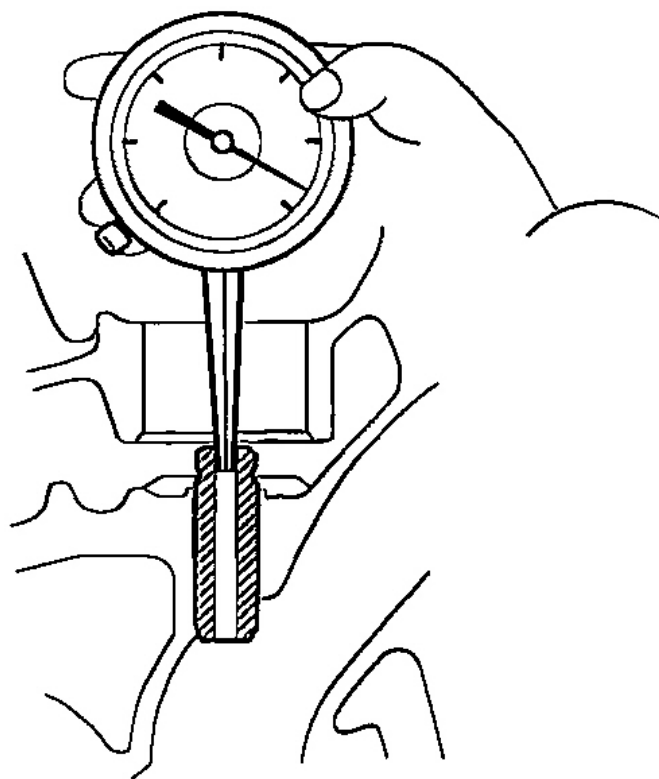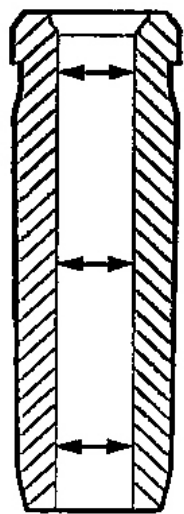

G00790121

Fig. 161: Checking Valve Guides
Courtesy of HYUNDAI MOTOR CO.

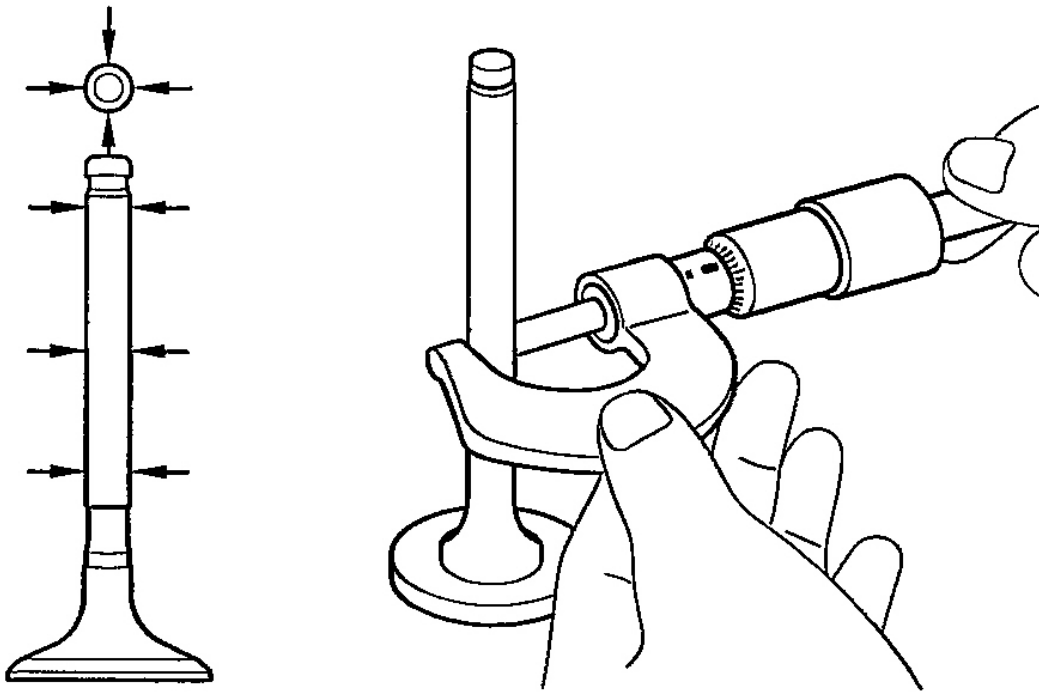

G00790122

Fig. 162: Measuring Valve Stems
Courtesy of HYUNDAI MOTOR CO.

Replacing Valve Seat Ring

1. Cut away the inner face of the valve seat to reduce the wall thickness.

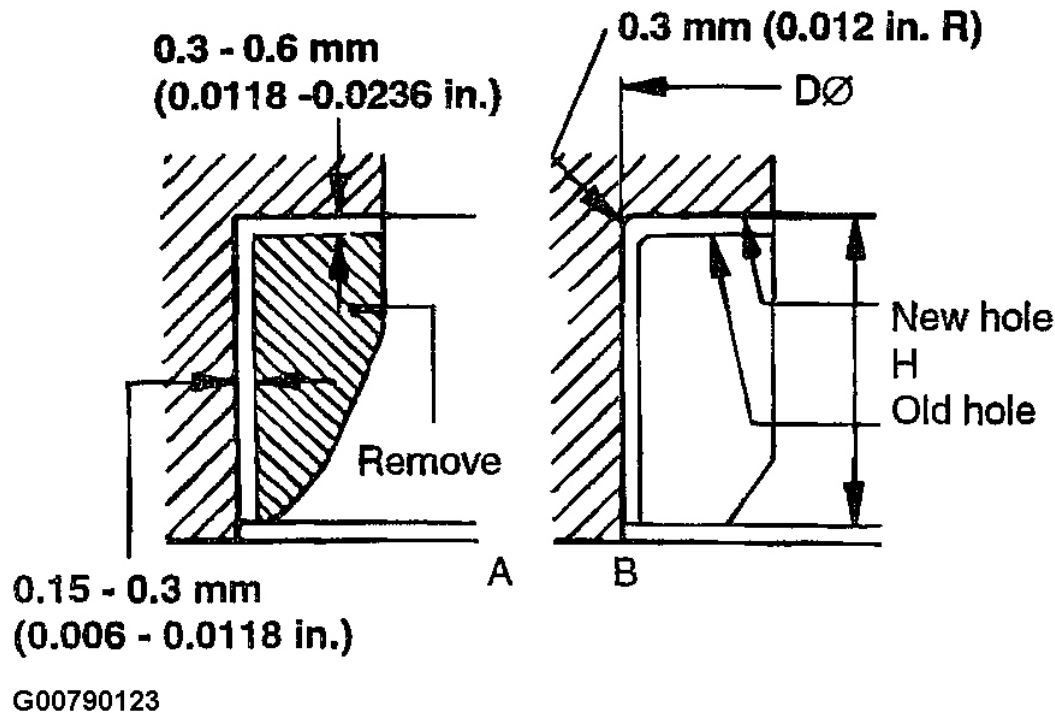


Fig. 163: Cutting Inner Face Of Valve Seat
Courtesy of HYUNDAI MOTOR CO.

2. Enlarge the diameter of the valve seat so that it matches the specified oversize hole diameter of the new valve seat ring.
3. Heat the cylinder head to about 250°C (480°F) and press-fit an oversize seat ring for the bore in the cylinder head.
4. Using lapping compound, lap the valve to the new seat.

Valve seat contact width

0.9 ~ 1.3 mm (0.035 ~ 0.051 in.)

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe


Description	Size mm (in.)	Size mark	Seat ring height H mm (in.)	Oversize hole diameter I.D. mm (in.)
Intake valve Seat ring	0.3(0.012) O.S. 0.6(0.024) O.S.	30 60	7.9~8.1 (0.311~0.319) 8.2~8.4 (0.323~0.331)	35.300~35.325 (1.3898~1.3907) 35.600~35.625 (1.4016~1.4026)
Exhaust valve Seat ring	0.3(0.012) O.S. 0.6(0.024) O.S.	30 60	7.9~8.1 (0.311~0.319) 8.2~8.4 (0.323~0.331)	33.300~33.325 (1.3110~1.3120) 33.600~33.625 (1.3228~1.3238)

G00790124

Fig. 164: Valve Seat Insert Oversizes
Courtesy of HYUNDAI MOTOR CO.

Replacing Valve Guide

1. Using the special tool (09221-3F000 A/B), withdraw the old valve guide toward the bottom of cylinder head.
2. Recondition the valve guide hole so that it can match the newly press-fitted oversize valve guide.

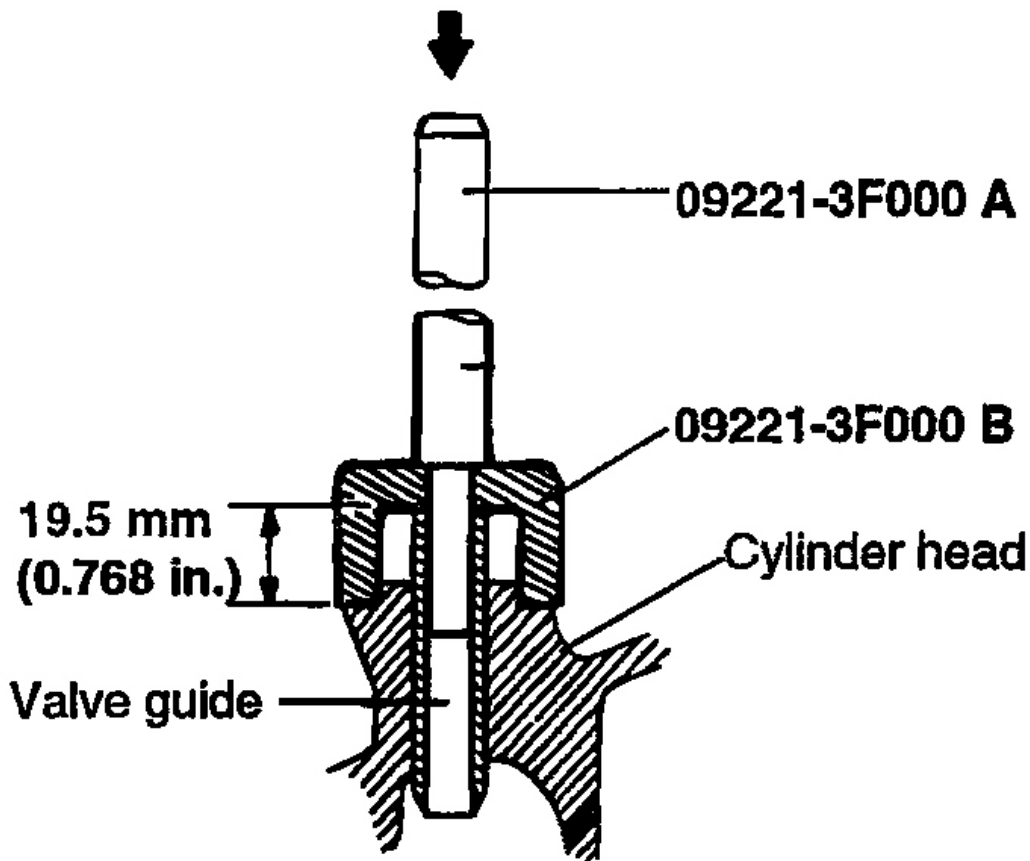


G00790125

Fig. 165: Press Fit Valve Guide
Courtesy of HYUNDAI MOTOR CO.

- Using the special tool (09221-3F000 A/B), press-fit the valve guide. The valve guide must be press-fitted from the upper side of the cylinder head. Keep in mind that the intake and exhaust valve guides are different in length.

NOTE: Do not install a valve guide unless it is oversize.

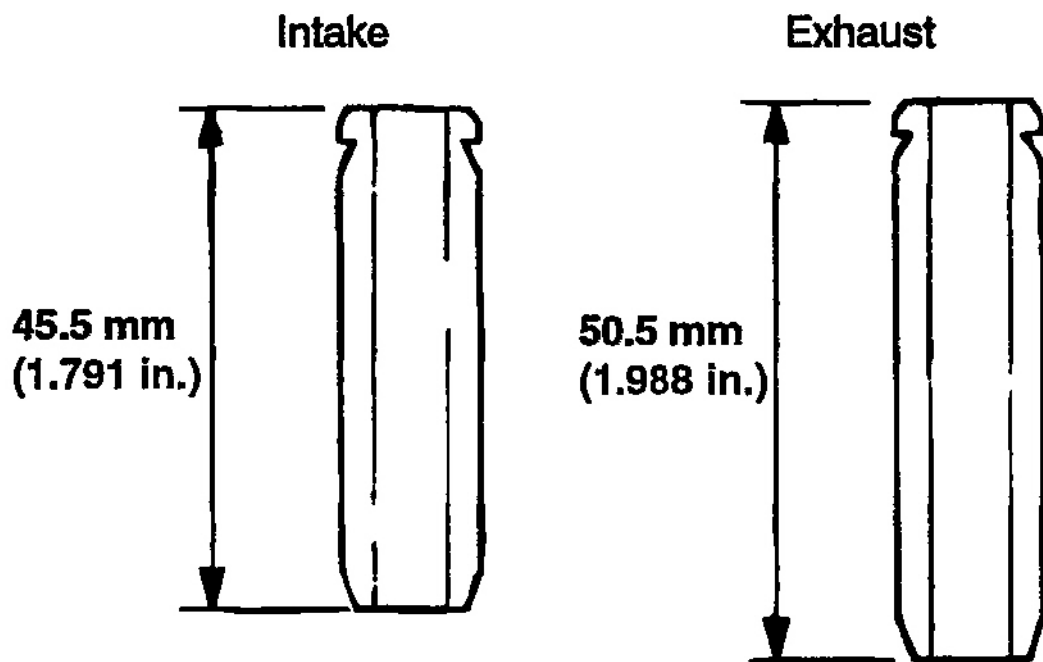

G00790126

Fig. 166: Checking If Valve Is Fully Seated
Courtesy of HYUNDAI MOTOR CO.

4. After the valve guide is press-fitted, insert a new valve and check for proper stem-to-guide clearance.
5. After the valve guide is replaced, check that the valve is seated properly. Recondition the valve seats as necessary.

Over size mm (in.)	Size mark	Oversize valve guide hole size mm (in.)
0.05 (0.002)	5	12.050 ~ 12.068 (0.4744 ~ 0.4751)
0.25 (0.010)	25	12.250 ~ 12.268 (0.4823 ~ 0.4830)
0.50 (0.020)	50	12.500 ~ 12.518 (0.4921 ~ 0.4928)

G00790127

Fig. 167: Valve Guide Oversizes
 Courtesy of HYUNDAI MOTOR CO.

Reassembly

NOTE:

1. Clean each part before assembly.
2. Apply engine oil to the sliding and rotating parts.

1. Install the spring seats.
2. Using a special tool (09222-28200), tap the seal in position lightly.

NOTE:

- Do not reuse old valve stem seals.
- Incorrect installation of the seal could result in oil leakage past the valve guides.

3. Apply engine oil to each valve. Insert the valve into the valve guide. Avoid pushing the valve into the seal by force. After inserting the valve, check that it moves smoothly.


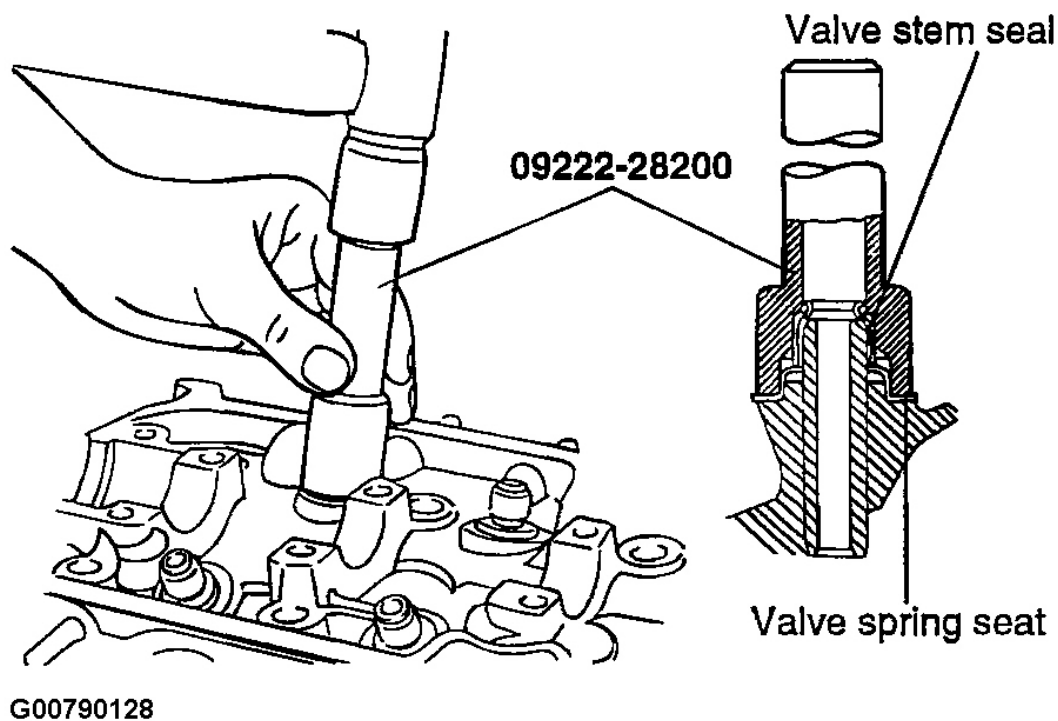


Fig. 168: Installing Valve Stem Seal
 Courtesy of HYUNDAI MOTOR CO.

4. Place valve springs so that the side coated with enamel faces the valve spring retainer and then install the retainer.

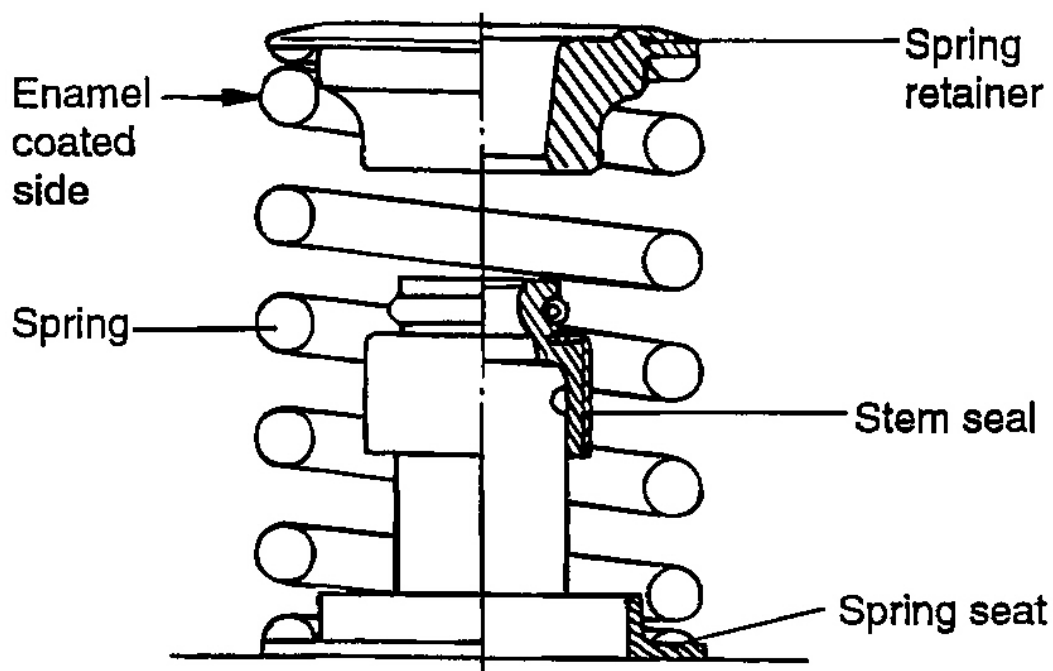


G00790129

Fig. 169: Identifying Valve Spring Installation

Courtesy of HYUNDAI MOTOR CO.

5. Using the special tool (09222-28000, 09222-28100), compress the spring and install the retainer locks. After installing the valves, ensure that the retainer locks are correctly in place before releasing the valve spring compressor.

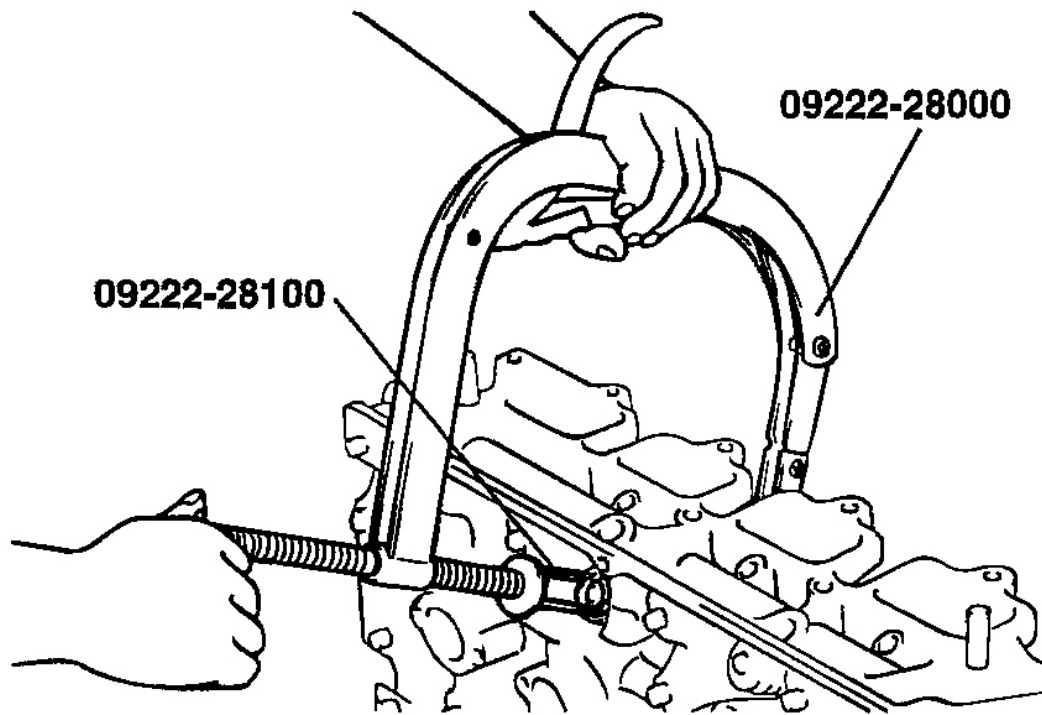

G00790130

Fig. 170: Installing Valve Spring Retainer Locks

Courtesy of HYUNDAI MOTOR CO.



NOTE: When the spring is compressed, Check that the valve stem seal is not pressed against the bottom of the retainer.

6. Clean both gasket surfaces of the cylinder block and cylinder head.
7. Verify the identification marks on the cylinder head gasket.
8. Install the gasket so that the surface with the identification mark faces toward the cylinder head.

NOTE: Check and measure the length of each head bolt. Maximum length : 99.4 mm (3.9 in.)

9. Tighten the bolts to the specified torque.

← Camshaft sprocket side

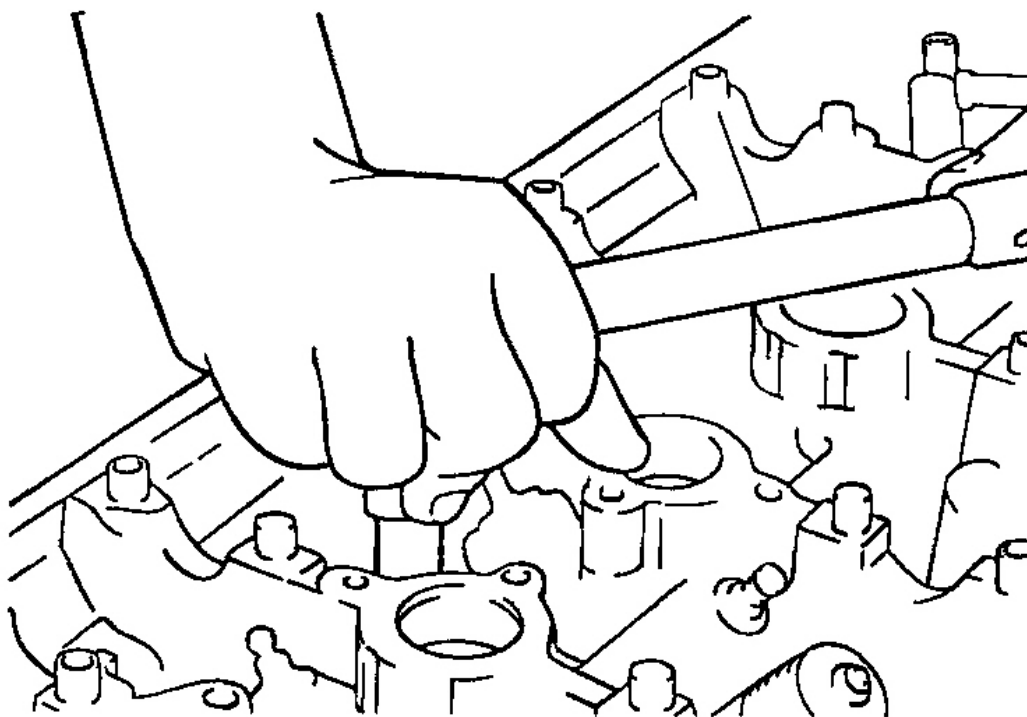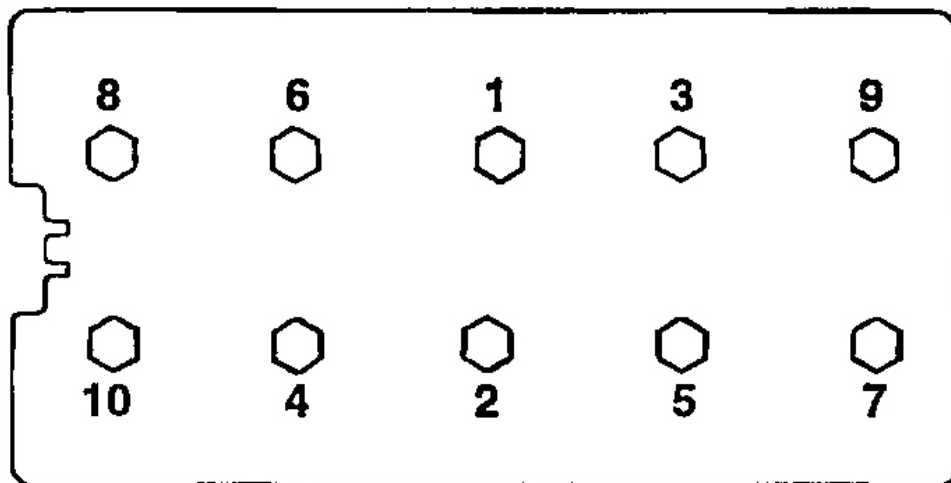

G00790131

Fig. 171: Cylinder Head Bolt Tightening Sequence**Courtesy of HYUNDAI MOTOR CO.****Tightening torque**

With used parts (head bolt, cylinder head cylinder block) :


20Nm (200 kg.cm, 15 lb.ft) + 90° + 90°

With new parts (even if only one thing is replaced) :

64Nm (640 kg.cm, 47 lb.ft) + release + 20Nm

(200 kg.cm, 14 lb.ft) + 90° + 90°

TIMING SYSTEM**TIMING BELT****Components**

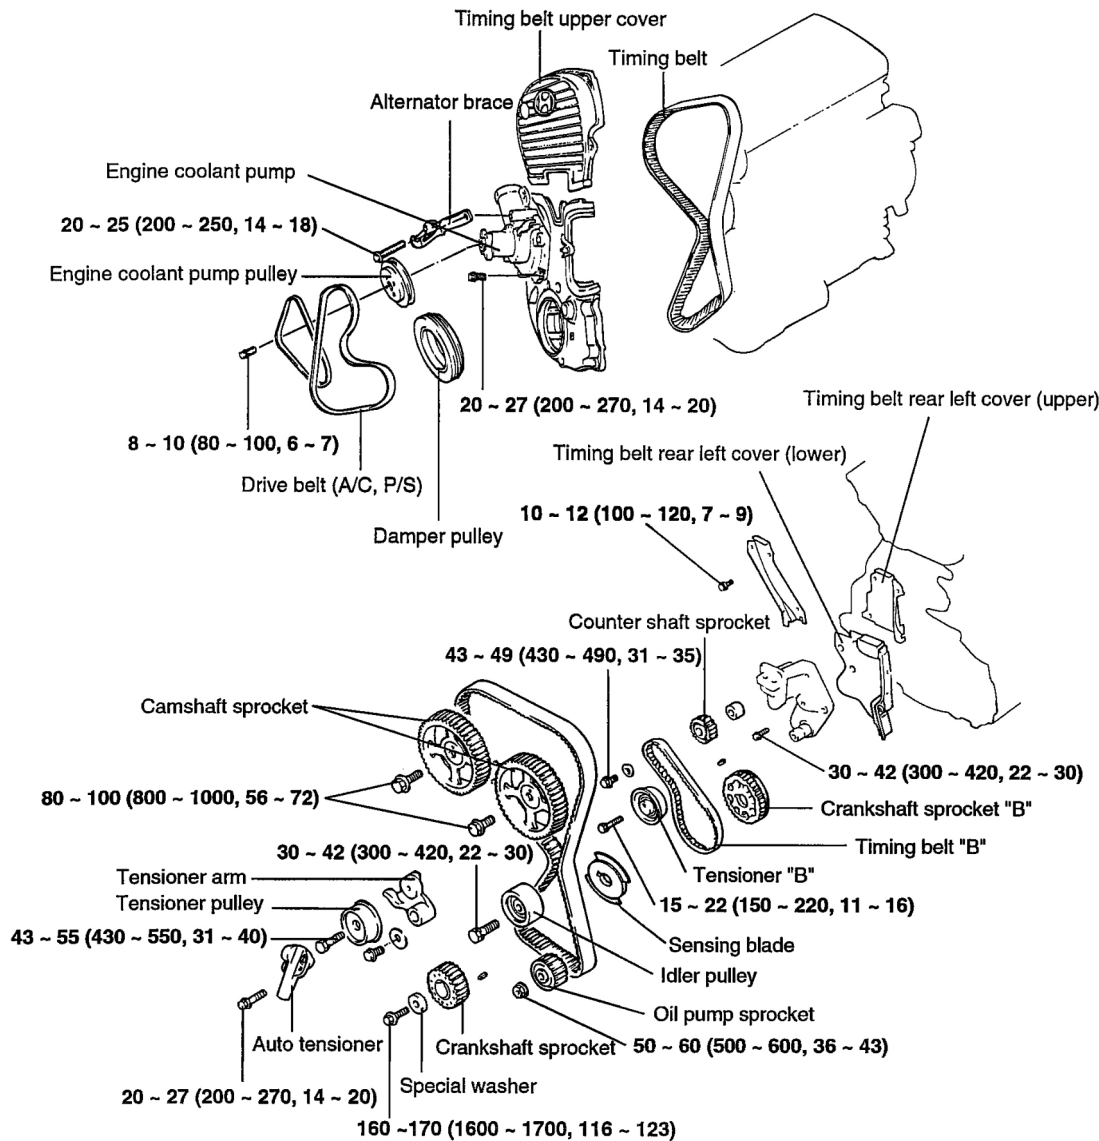

TORQUE : Nm (kg·cm, lb·ft)

G00790132

Fig. 172: Timing Belt Components
Courtesy of HYUNDAI MOTOR CO.


Removal

CAUTION: Rotate the crankshaft clockwise and align the timing marks to set the No. 1 cylinder's piston to TDC.
At this time, the timing marks of the camshaft sprocket and cylinder head cover should coincide with each other and the dowel pin of the camshaft-sprocket should be at the upper side.

2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

1. Remove the crankshaft pulley, engine coolant pump pulley and drive belt.
2. Remove the timing belt cover.
3. Remove the auto tensioner.

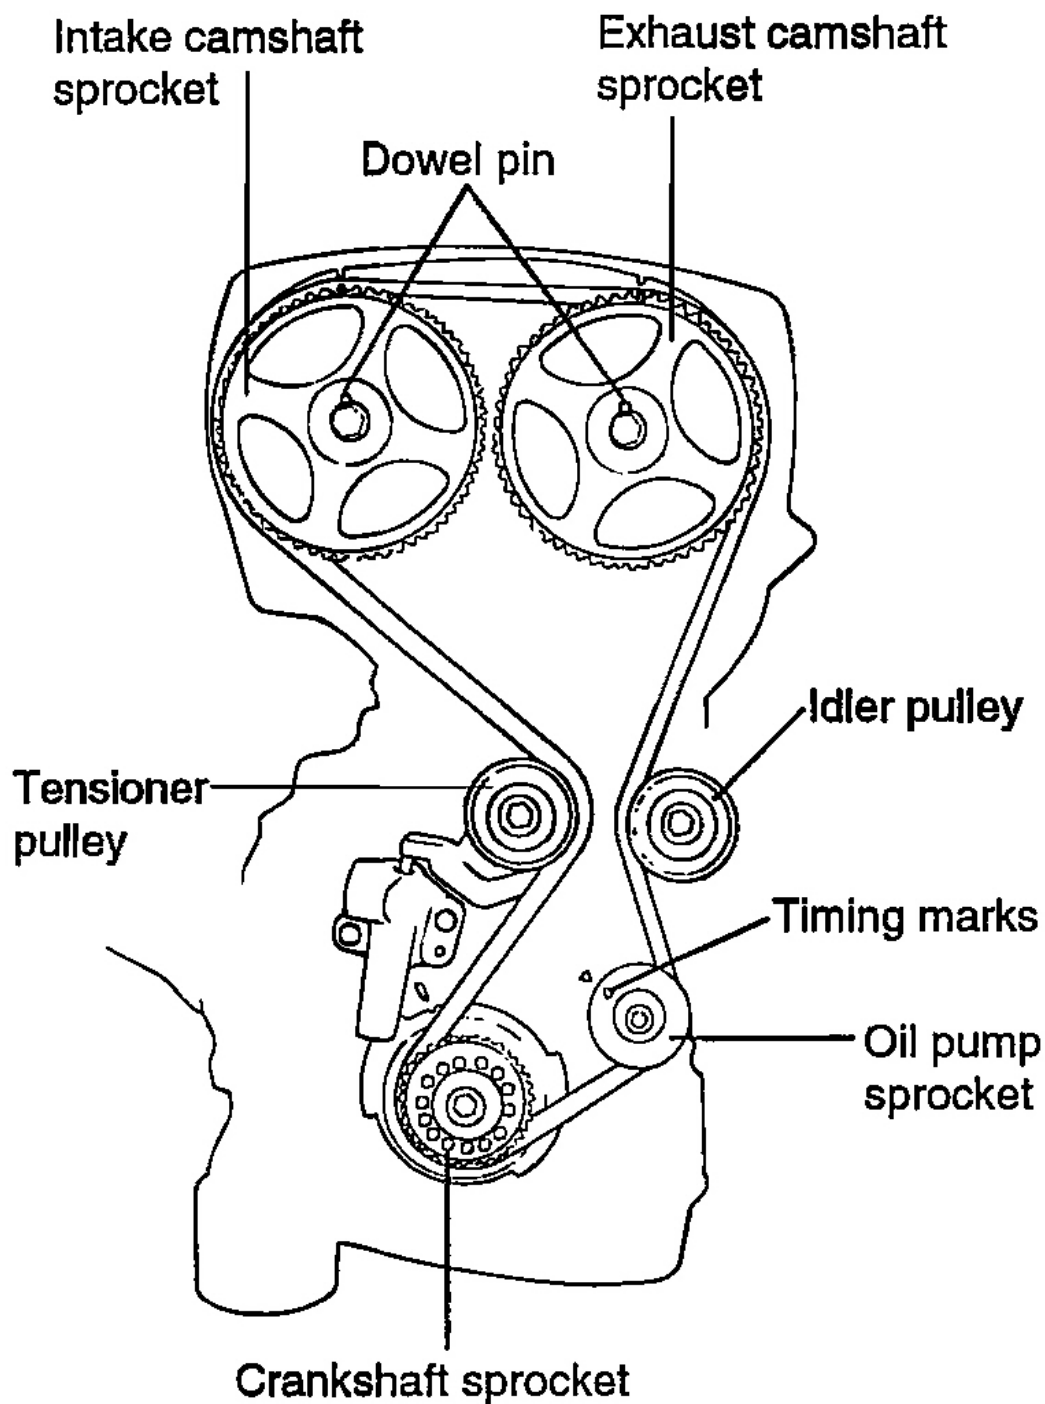


G00790133

Fig. 173: Identifying Timing Belt & Pulleys

Courtesy of HYUNDAI MOTOR CO.

NOTE: If the timing belt is reused, make an arrow mark indicating the turning direction (or the front of the engine) to make sure that the belt is reinstalled in the same direction as before.
In this case the timing marks on the camshaft sprocket and on the locker cover should be aligned and the dowel pins on the camshaft sprockets should be positioned upward.

4. Remove the timing belt.

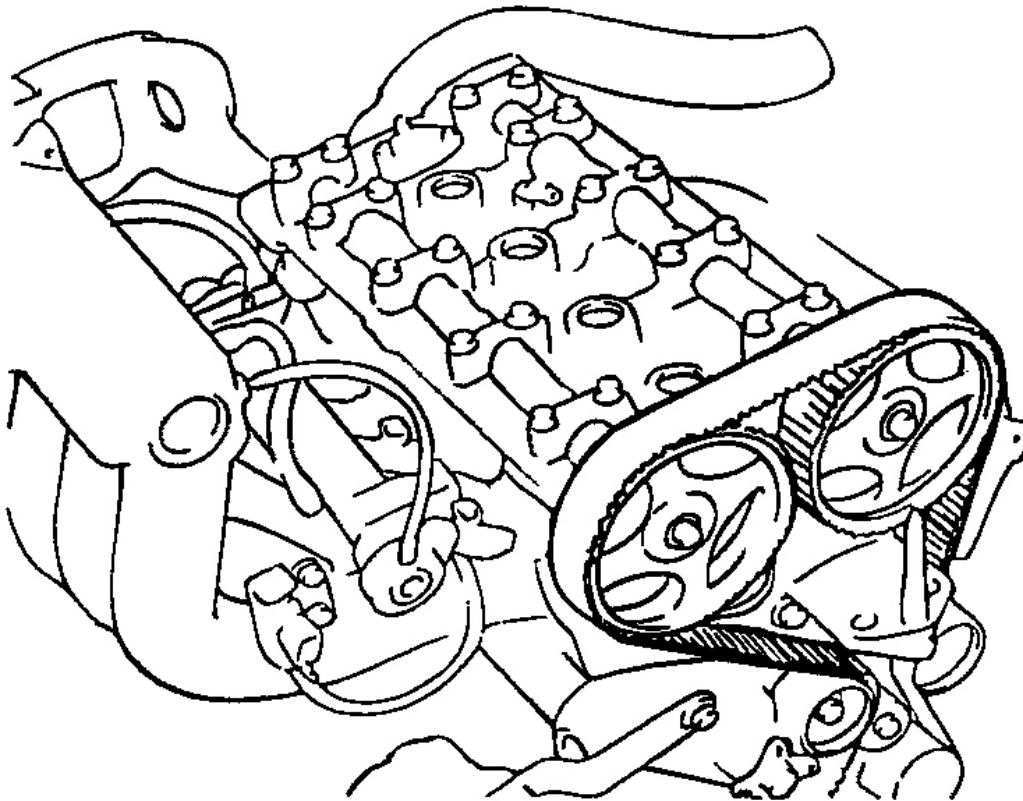


G00790134

Fig. 174: View Of Timing Belt
Courtesy of HYUNDAI MOTOR CO.

5. Remove the camshaft sprockets.

NOTE: Be careful not to damage the cylinder head and camshaft sprocket with


the wrench.

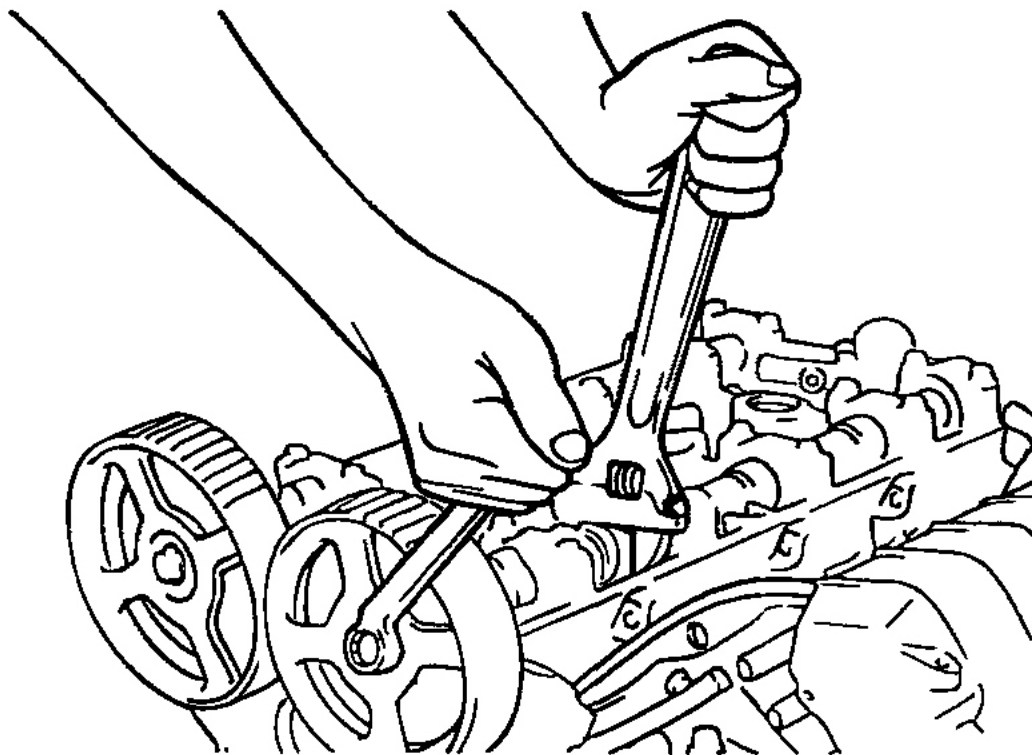

G00790135

Fig. 175: Removing Camshaft Sprockets
Courtesy of HYUNDAI MOTOR CO.

6. When the oil pump sprocket nut is removed, first remove the plug at the left side of the cylinder block and insert a screwdriver to keep the left counter balance shaft in position. Use a screwdriver with a shaft measuring 8 mm (0.3in.) in diameter which can be inserted by more than 60 mm (2.36 in.)
7. Remove the oil pump sprocket retaining nut and the oil pump sprocket.

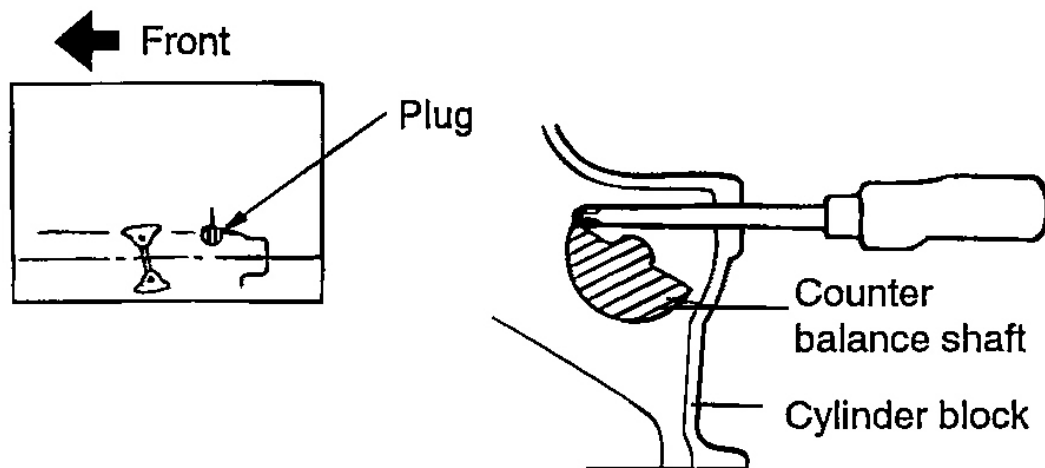


G00790136

Fig. 176: Securing Counter Balance Shaft
Courtesy of HYUNDAI MOTOR CO.

8. Loosen the right counter balance shaft sprocket mounting bolt until it can be loosened by hand.
9. Next, remove the tensioner "B" and then the timing belt "B".

CAUTION: After the timing belt "B" is removed, do not attempt to loosen bolts while holding the sprocket with pliers or any other tool.

10. Remove the crankshaft sprocket "B" from the crankshaft.

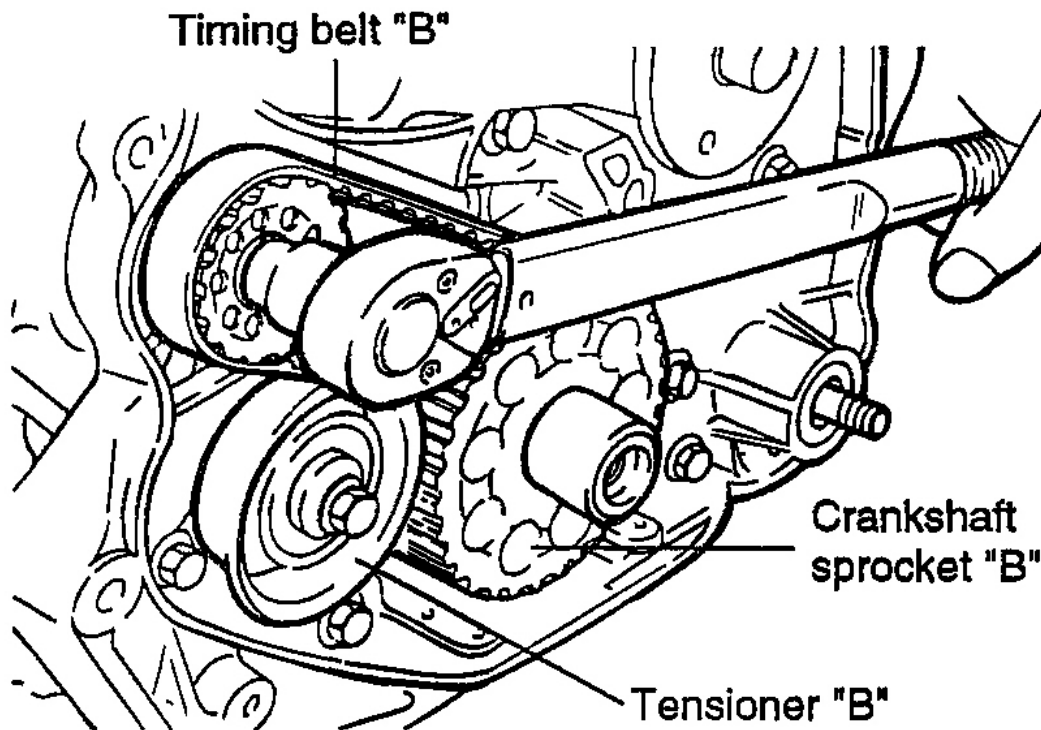

G00790137


Fig. 177: Removing Crankshaft Sprocket "B"

Courtesy of HYUNDAI MOTOR CO.

Inspection

Sprockets, Tensioner Pulley & Idler Pulley

1. Check the camshaft sprocket, crankshaft sprocket, tensioner pulley and idler pulley for abnormal wear, cracks or damage. Replace if necessary.
2. Inspect the tensioner pulley and the idler pulley for easy and smooth rotation and check for play or noise. Replace if necessary.
3. Replace the pulley if there is a grease leak from its bearing.

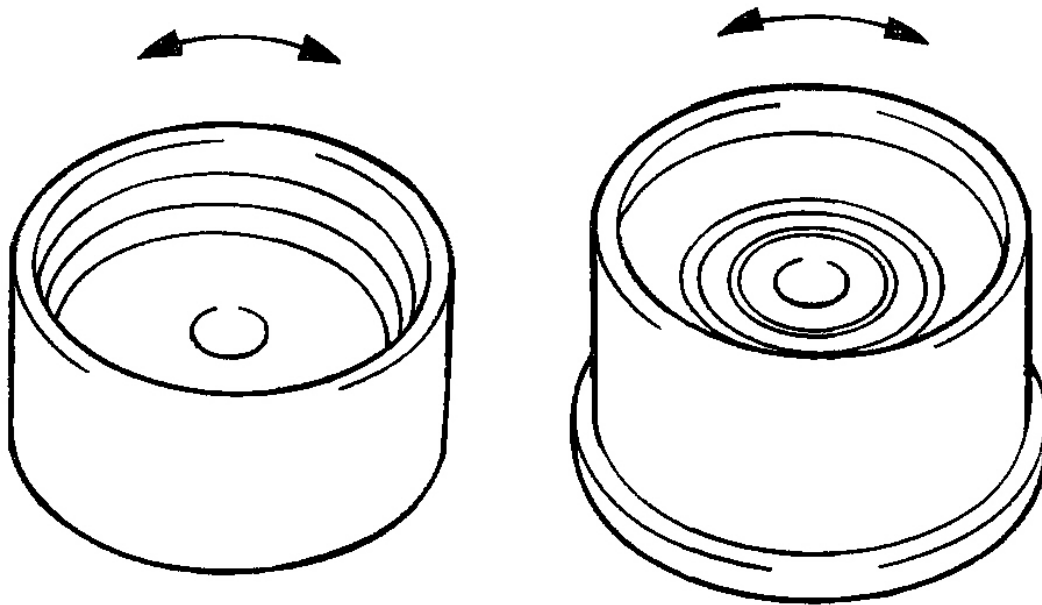


G00790138

Fig. 178: Checking Pulley For Smooth Rotation
Courtesy of HYUNDAI MOTOR CO.

Auto Tensioner

1. Check the auto tensioner for leaking and replace if necessary.
2. Check the rod end for wear or damage and replace if necessary.

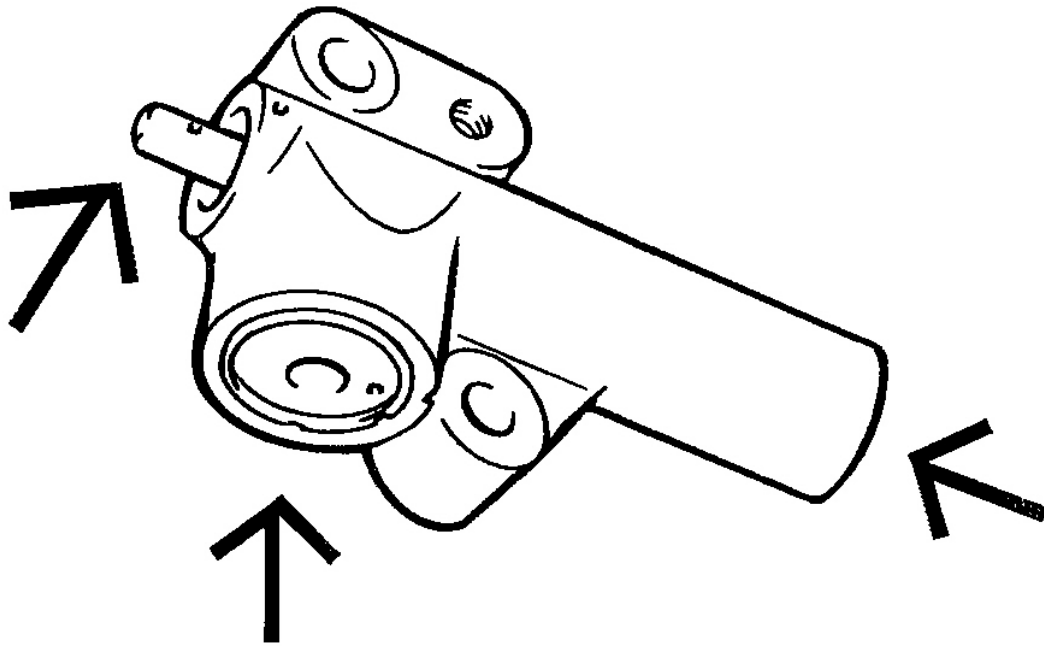

G00790139

Fig. 179: Identifying Auto Tensioner
Courtesy of HYUNDAI MOTOR CO.

3. Measure the rod protrusion. If it is out of specification, replace the auto tensioner.

Standard value : 14.5 mm (0.57 in)


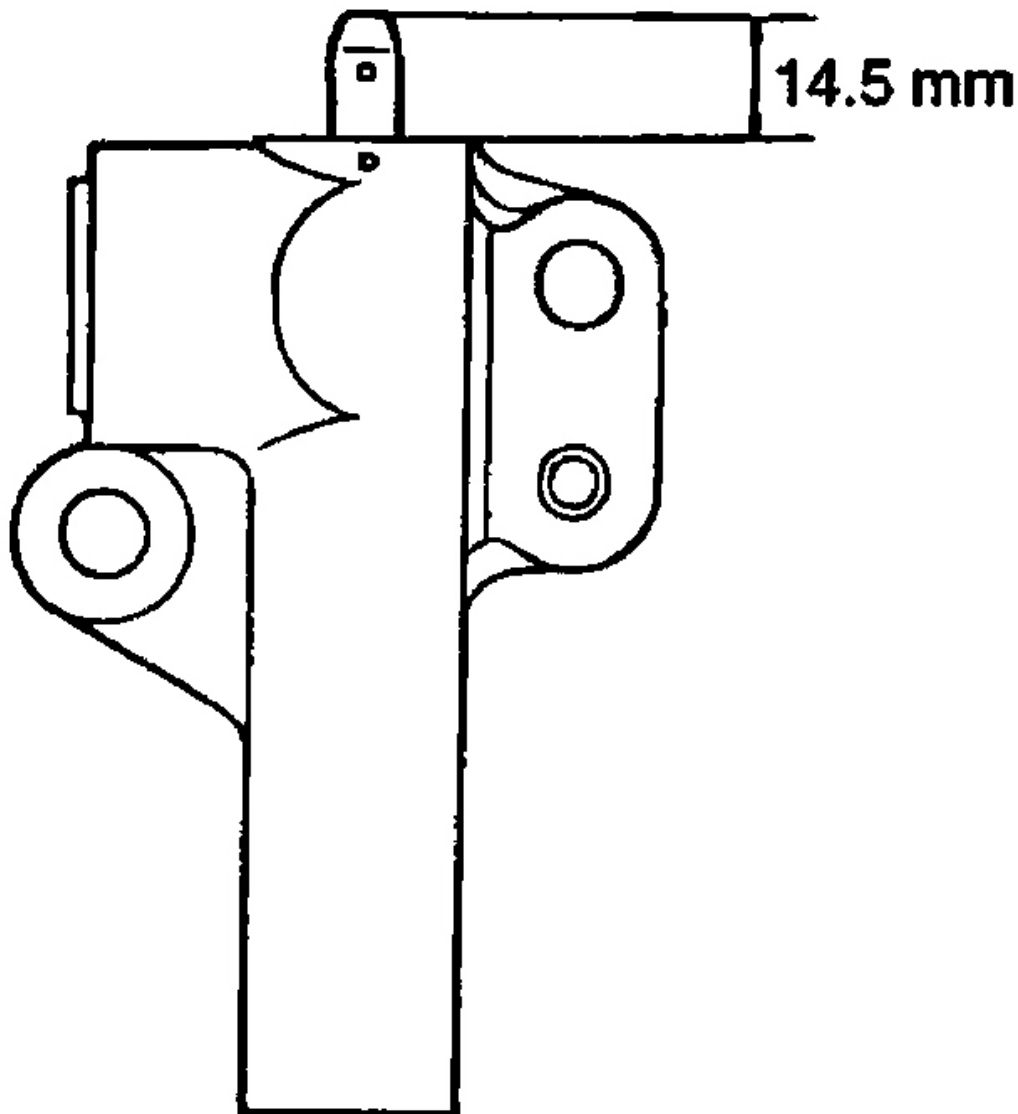
**G00790140**

Fig. 180: Measuring Rod Protrusion
Courtesy of HYUNDAI MOTOR CO.

4. Using a soft jaw vise , compress the auto tensioner rod. slowly. If the rod can be easily retracted, replace the auto tensioner. You should feel extensive resistance when pushing the rod in. And it must be compressed in several steps.

NOTE: Clamp the auto tensioner in the vise so that it is level. Use soft jaws in the vise to avoid damaging the auto tensioner.

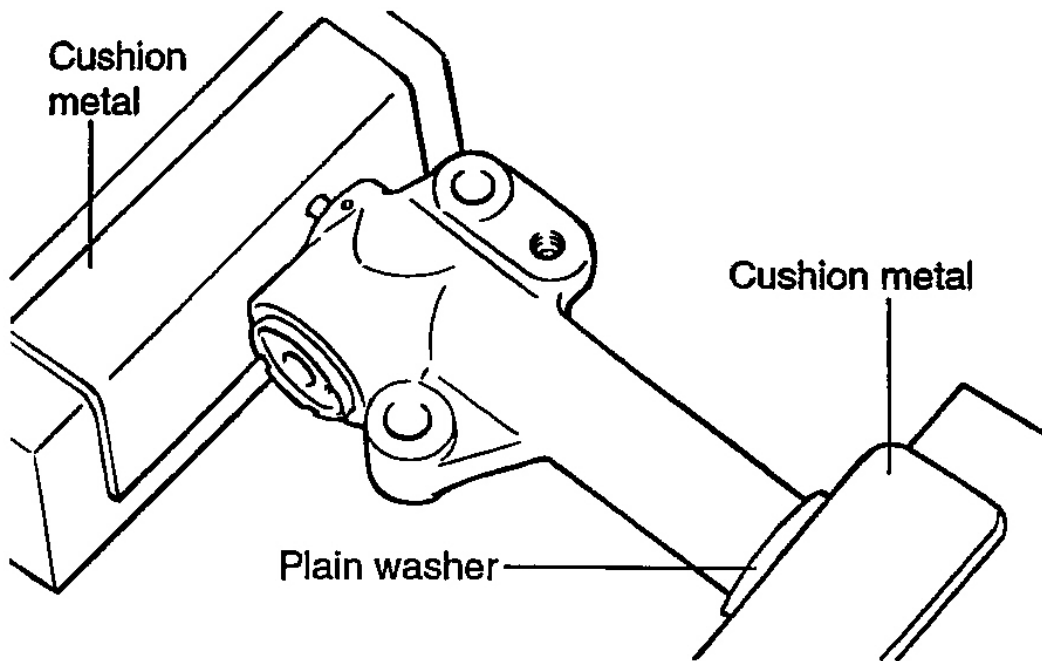

G00790141



Fig. 181: Compressing Auto Tensioner Rod
Courtesy of HYUNDAI MOTOR CO.

Timing Belt

1. Check the belt for oil or dust deposit. Replace if necessary. Small deposits should be wiped away with a dry cloth or paper. Do not clean with solvent.
2. When the engine is overhauled or belt tension is adjusted, check the belt carefully. If any of the following flaws are evident, replace the belt with a new one.





2003 Hyundai Santa Fe

2002-04 ENGINES 2.4L 4-Cylinder - Santa Fe

Description	Flaw conditions
1. Hardened back surface of rubber	Back surface is glossy, Non-elastic and so hard that, when your fingernail is pressed into it, no mark is produced. 
2. Cracked back surface of rubber	



G00790143

Fig. 182: Checking Belt Surface With Finger Nail
Courtesy of HYUNDAI MOTOR CO.

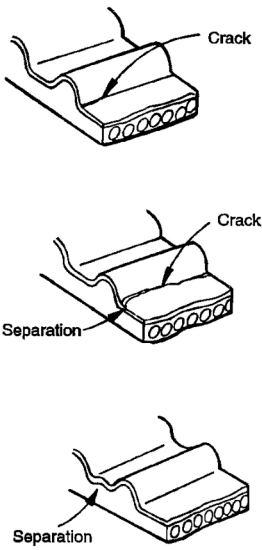Description	Flaw conditions
3. Cracked or separating canvas	
4. Badly worn out teeth (initial stage)	Tooth flank shows canvas on the load side (Fluffy canvas fibers, rubber changed into white color and unclear canvastexture) 
5. Badly worn out teeth (last stage)	Tooth flank worn and rubber exposed on load side (tooth width reduced) 
6. Cracked tooth bottom	

G00790144

Fig. 183: Checking Belt For Damage (1 Of 2)
 Courtesy of HYUNDAI MOTOR CO.

Description	Flaw conditions
7. Missing tooth	Tooth missing and canvas fiber exposed 
8. Badly worn side of belt	Rounded belt side  Abnormal wear (Fluffy canvas fiber)
9. Cracked side of belt	


G00790145

Fig. 184: Checking Belt For Damage (2 Of 2)
 Courtesy of HYUNDAI MOTOR CO.

Installation

1. Install the crankshaft sprocket "B" into the crankshaft.


CAUTION: Pay attention to the direction of the flange. if it is installed in the wrong direction, a broken belt could result.

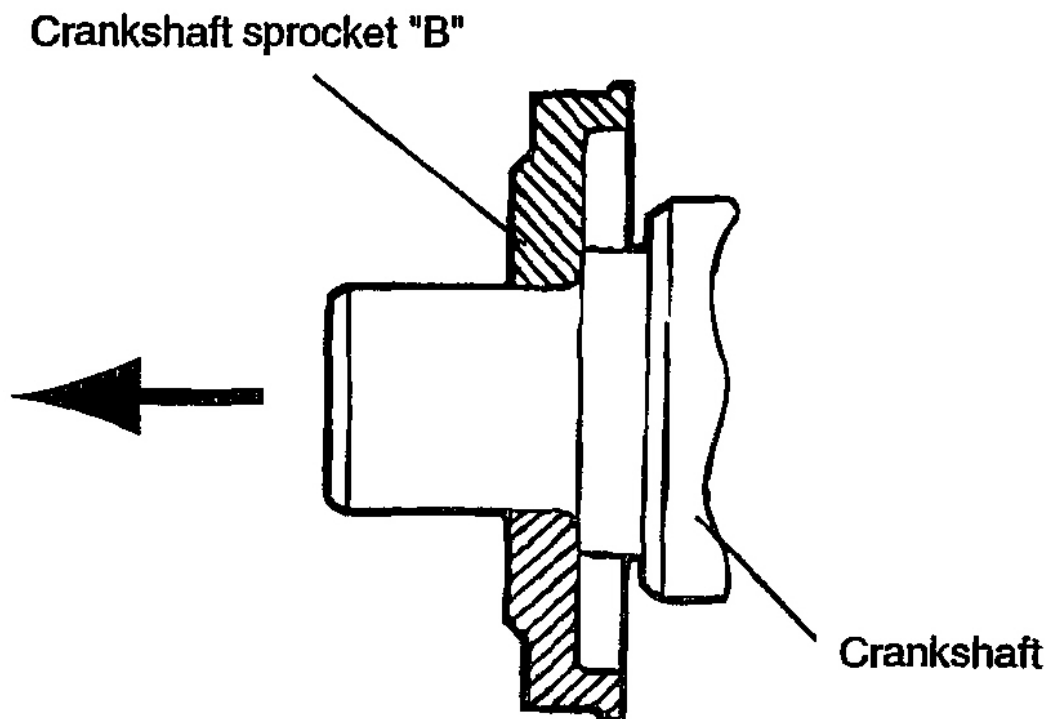

G00790146

Fig. 185: Identifying Crankshaft Sprocket "B"
Courtesy of HYUNDAI MOTOR CO.

2. Apply engine oil to the outer surface of the spacer lightly and then install the spacer to the right counter balance shaft. Be sure to install in the direction shown in the illustration.
3. Install the counter balance shaft sprocket onto the right counter balance shaft and then tighten its flange bolt by hand tightly.

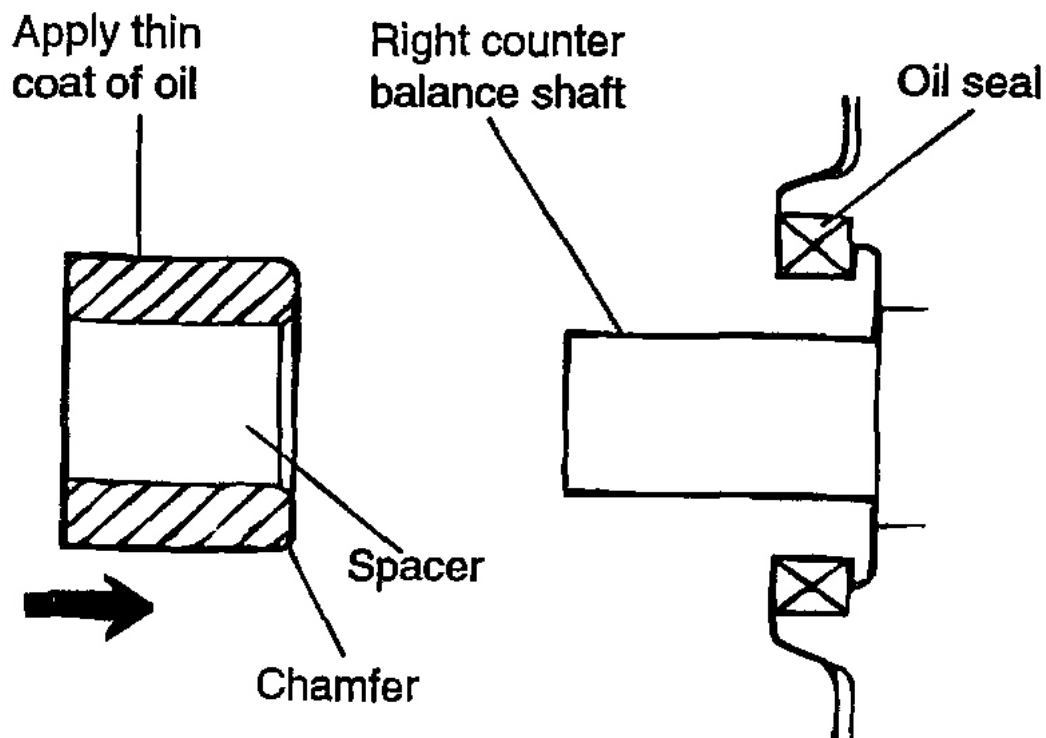


G00790147


Fig. 186: Installing Counter Balance Shaft
Courtesy of HYUNDAI MOTOR CO.

4. Align the timing mark on each sprocket with the corresponding timing mark on the front case.

Timing mark (Slot in front case)

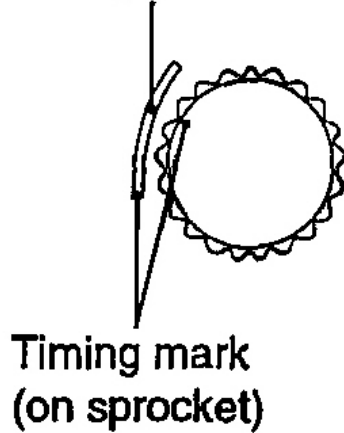

Timing mark (on front case)




G00790148

Fig. 187: Identifying Timing Marks
Courtesy of HYUNDAI MOTOR CO.

5. When the timing belt "B" is installed, make certain that its tension side has no slack.

Install the tensioner "B" so the center of the pulley is located on the left side of the mounting bolt and in the pulley flange faces the front of the engine.


Align the timing mark on the right counter balance shaft sprocket with the timing mark on the front case.

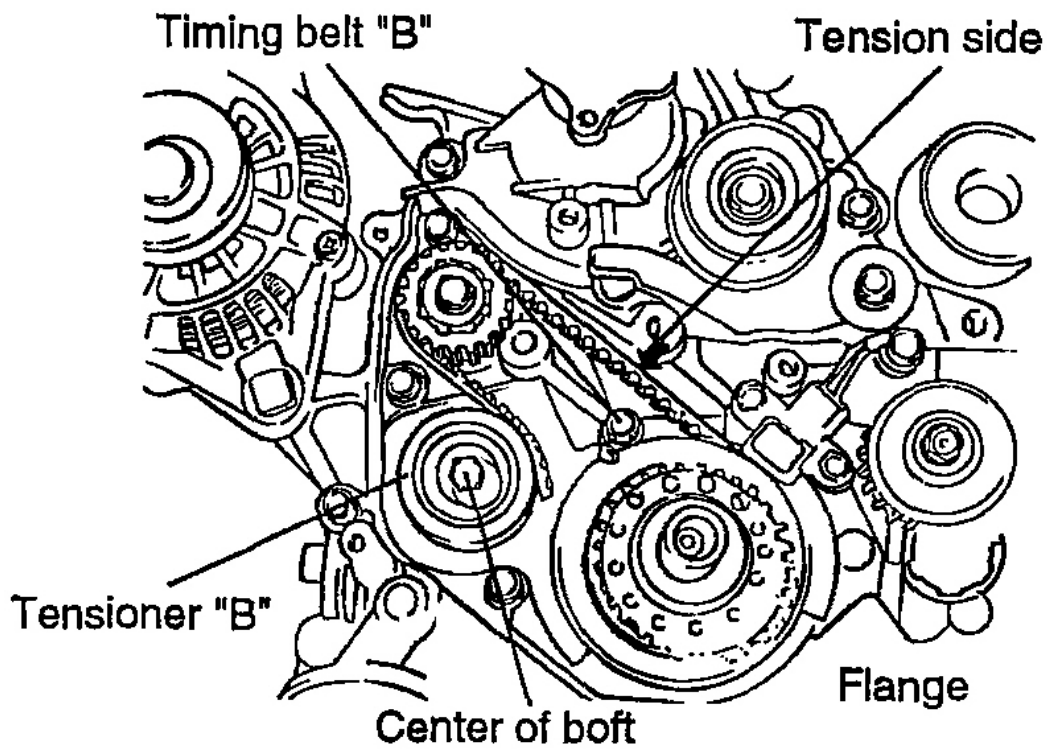

G00790149

Fig. 188: Installing Timing Belt "B"
Courtesy of HYUNDAI MOTOR CO.

6. Lift the tensioner "B" to tighten the timing belt "B" so that its tension side is pulled tight. In this condition, tighten the bolt to secure tensioner "B". As the bolt is tightened, be careful to prevent the shaft from turning. If the shaft is turned, the belt will be tightened excessively.

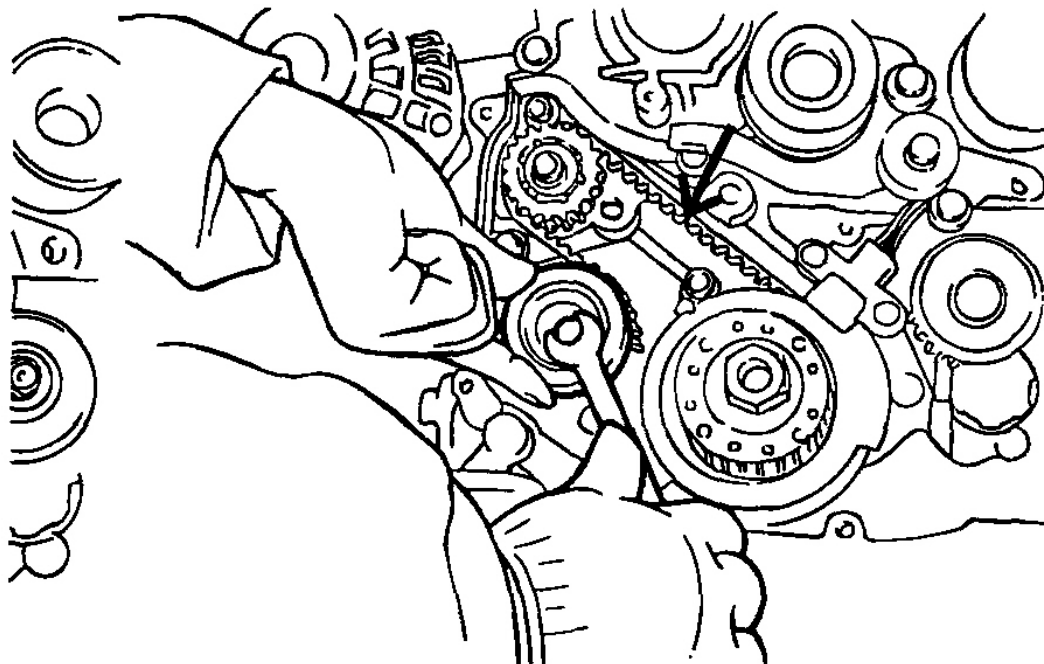

G00790150

Fig. 189: Tightening Tensioner "B"
Courtesy of HYUNDAI MOTOR CO.

7. Check to ensure that the timing marks are in alignment.
8. Verify the tension of the timing belt.

Method 1 : Verify that, when the center of the span on the tension side is depressed with an index finger in the direction of arrow, the deflection of the belt is within specification.


Belt deflection : 5 ~ 7 mm (0.20 ~ 0.28 in)

Method 2 : Measure the tension of the timing belt by using a tension gauge.

Span length	Pressure	Torque
139mm (5.47 in.)	0.42 kg/cm ² (42 kPa)	50 ~ 100Nm (500 ~ 1000kg.cm, 36 ~ 72 lb.ft)

G00790151

Fig. 190: Belt Tension Specification Table
Courtesy of HYUNDAI MOTOR CO.

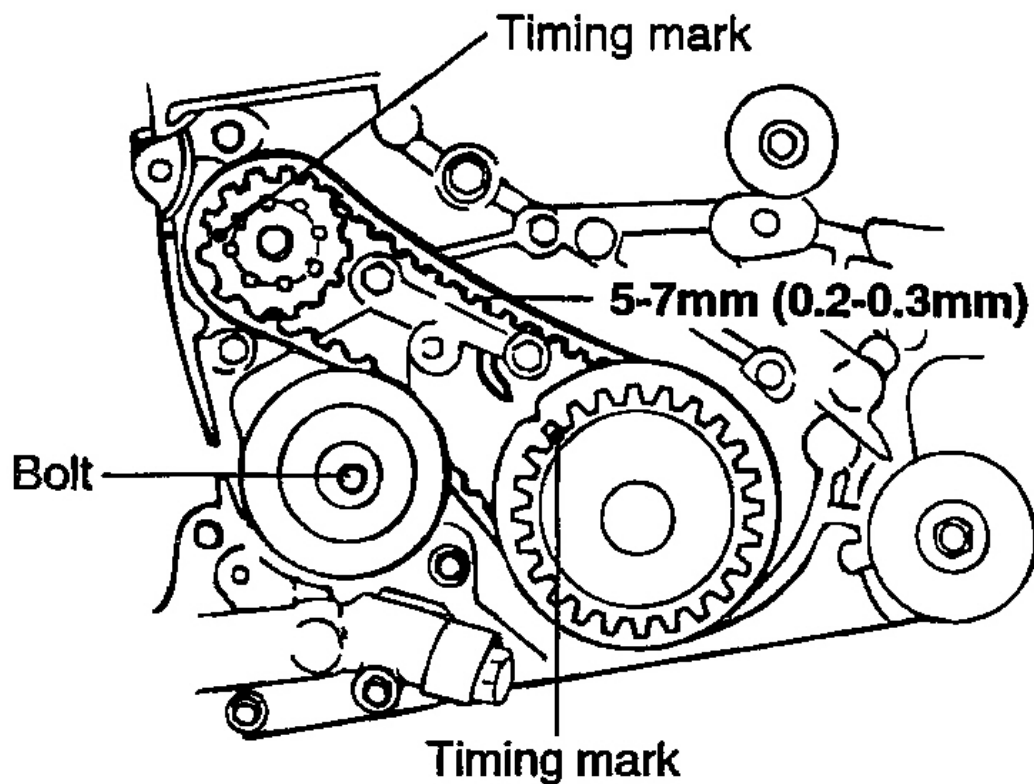


G00790152

Fig. 191: View Of Timing Belt & Alignment Marks

Courtesy of HYUNDAI MOTOR CO.

9. Install the flange and crankshaft sprocket onto the crankshaft. Be sure to install the as shown in the illustration.

CAUTION: Pay attention to the direction of the flange. If it is installed in the wrong direction, a broken belt could result.

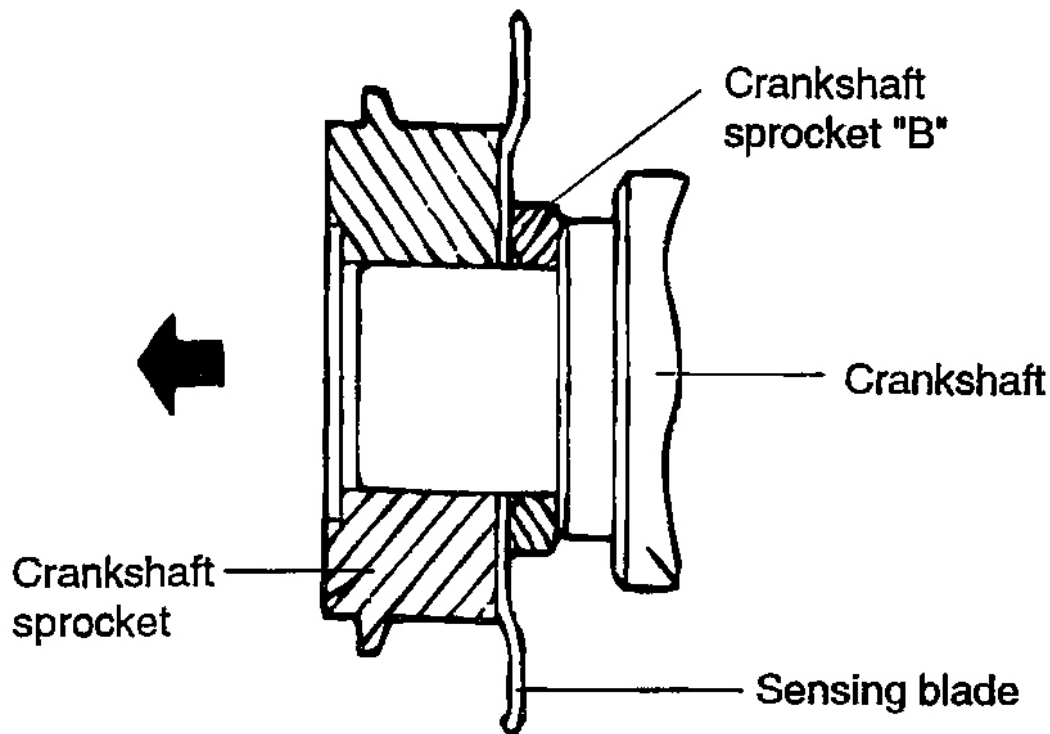

G00790153

Fig. 192: Installing Crankshaft Sprocket
Courtesy of HYUNDAI MOTOR CO.

10. Install the special washer and sprocket bolt to the crankshaft and then tighten the sprocket bolt.

Tightening torque

Crankshaft sprocket bolt :

160 ~ 170 Nm (1600 ~ 1700 kg.cm, 116 ~ 123 lb.ft)

11. Insert a screwdriver through the plug hole in the left side of the cylinder block to keep the shaft in position.


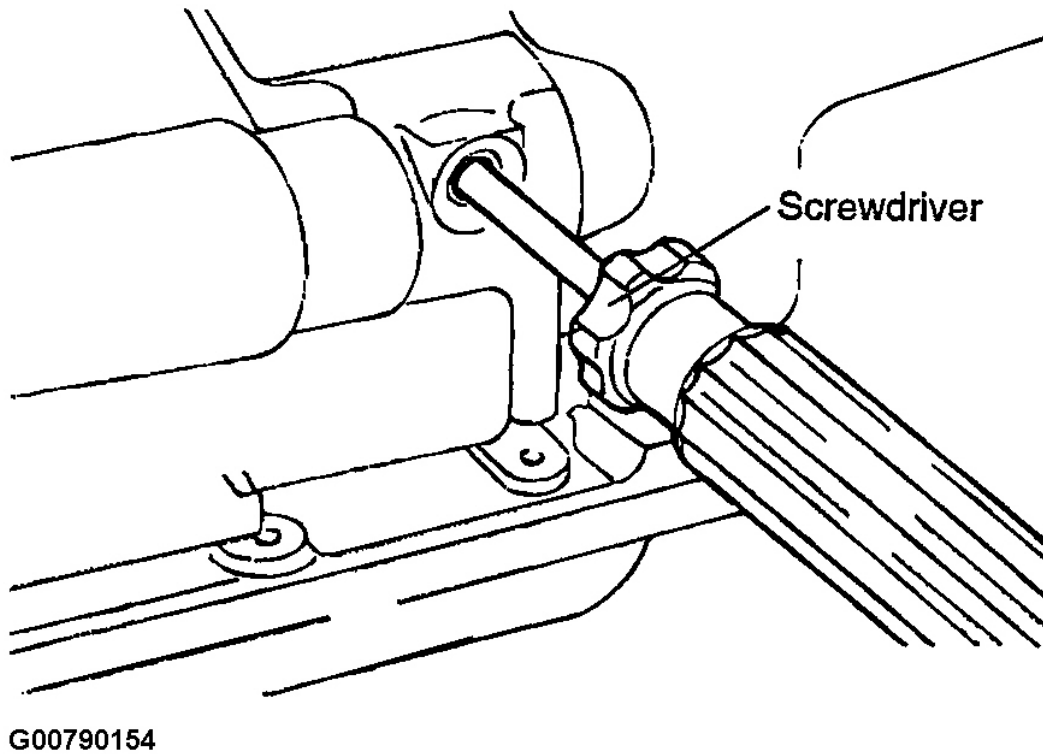


Fig. 193: Identifying Screw Driver In Plug Hold
Courtesy of HYUNDAI MOTOR CO.

12. Install the oil pump sprocket and tighten the nut to the specified torque.

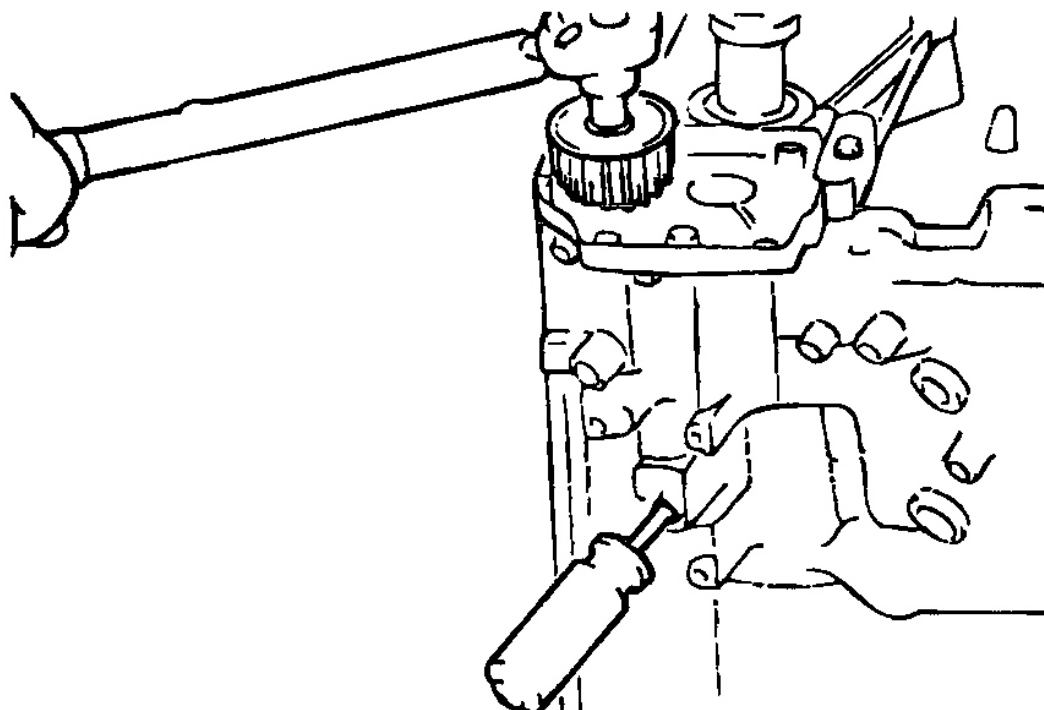

G00790155

Fig. 194: Tightening Oil Pump Sprocket
Courtesy of HYUNDAI MOTOR CO.

Tightening torque

Oil pump sprocket

50 ~ 60 Nm (500 ~ 600 kg.cm, 36 ~ 43 lb.ft)

13. Install the camshaft sprocket and tighten the bolt to the specified torque.


Tightening torque

Camshaft sprocket bolt :

80 ~ 100 Nm (800 ~ 1000 kg.cm, 58 ~ 72 lb.ft)

14. Install the auto tensioner.

CAUTION: Leave the set pin installed in the auto tensioner.

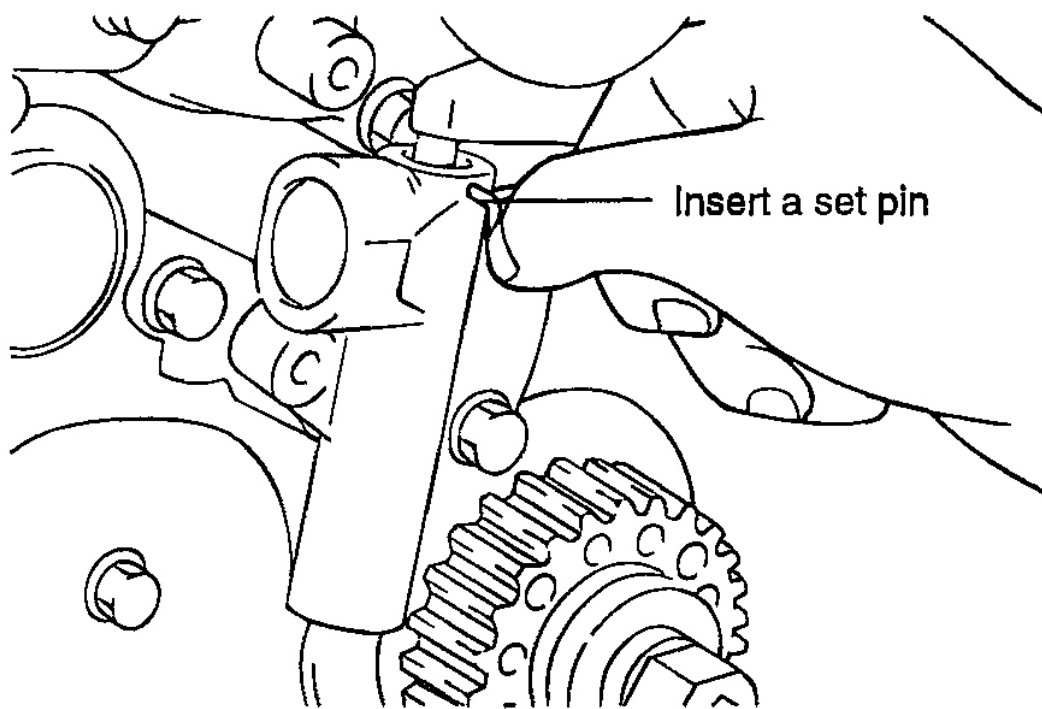

G00790156

Fig. 195: Installing Auto Tensioner
Courtesy of HYUNDAI MOTOR CO.

NOTE: If the auto tensioner rod is in its fully extended position, reset it as follows.

1. Clamp it in a vise equipped with soft jaws, in a level position. Use a plain washer if there is a plug at the bottom of the auto tensioner.
2. Compress the rod slowly with the vise until the set hole in the rod is aligned with set hole in the cylinder.

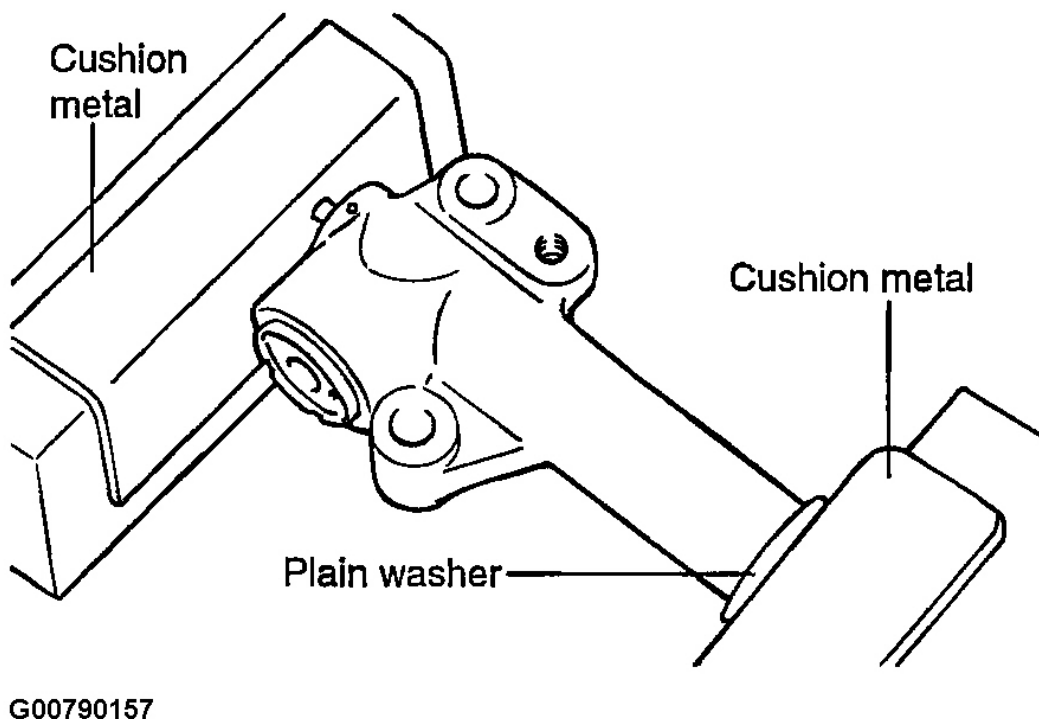


Fig. 196: Compressing Rod In A Vise
Courtesy of HYUNDAI MOTOR CO.

3. Insert a set pin through the auto tensioner body and rod.


CAUTION: Leave the set pin installed in the auto tensioner.

15. Install the tensioner pulley onto the tensioner arm.

Tightening torque

Tensioner pulley

43 ~ 55 N.m (430 ~ 550 kg.cm, 31 ~ 40 lb.ft)

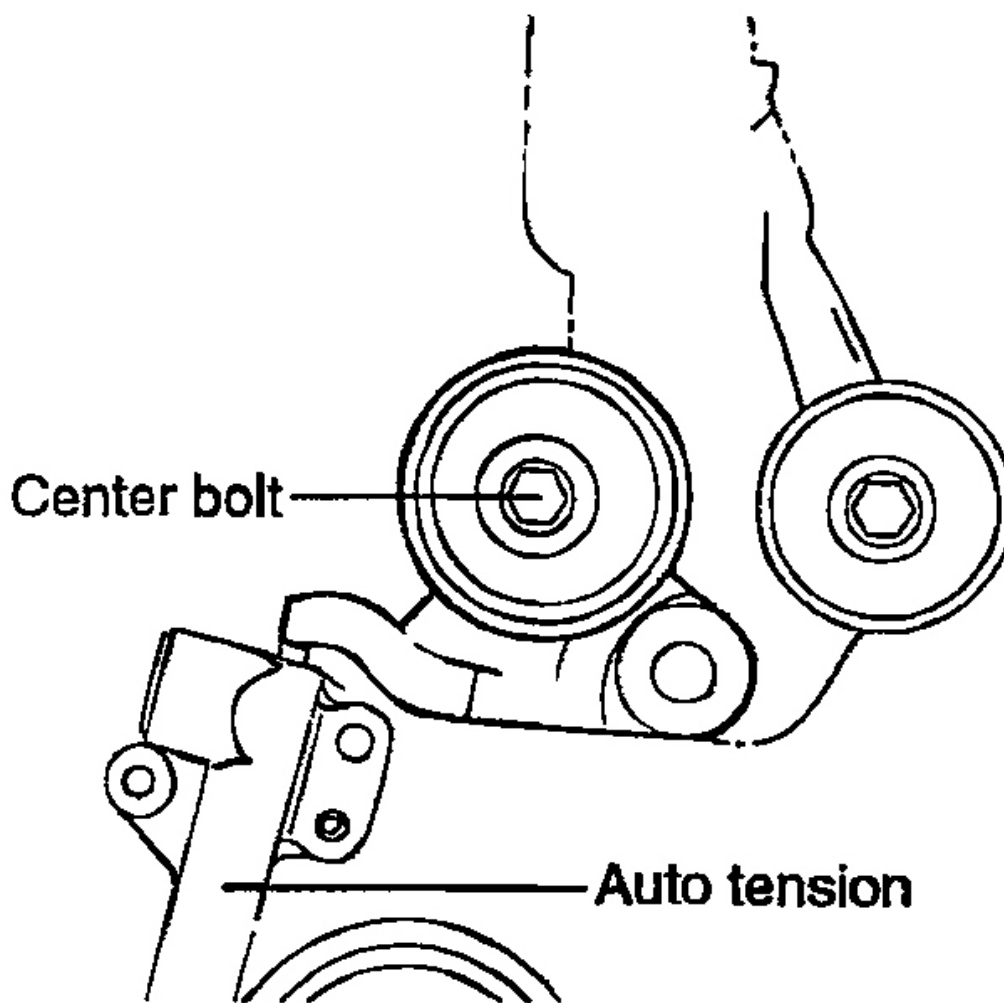

G00790158

Fig. 197: Identifying Tensioner Pulley
Courtesy of HYUNDAI MOTOR CO.

16. Rotate the camshaft sprockets so that the dowel pin of the camshaft sprocket is at the upper side. Set the timing mark of sprocket correctly.


NOTE:

1. Before installing the timing belt, if the timing mark of the cam sprocket doesn't coincide with that of the rocker cover, do not rotate the cam sprocket more than 2 teeth of the sprocket in any direction. Rotating the sprocket more than 2 teeth may make the valve and piston touch each

other.

2. If it is necessary to rotate the cam sprocket more than 2 teeth, rotate the crank sprocket counter clock wise first based on the timing mark.


After the cam sprocket is properly timed return the crankshaft to TDC.

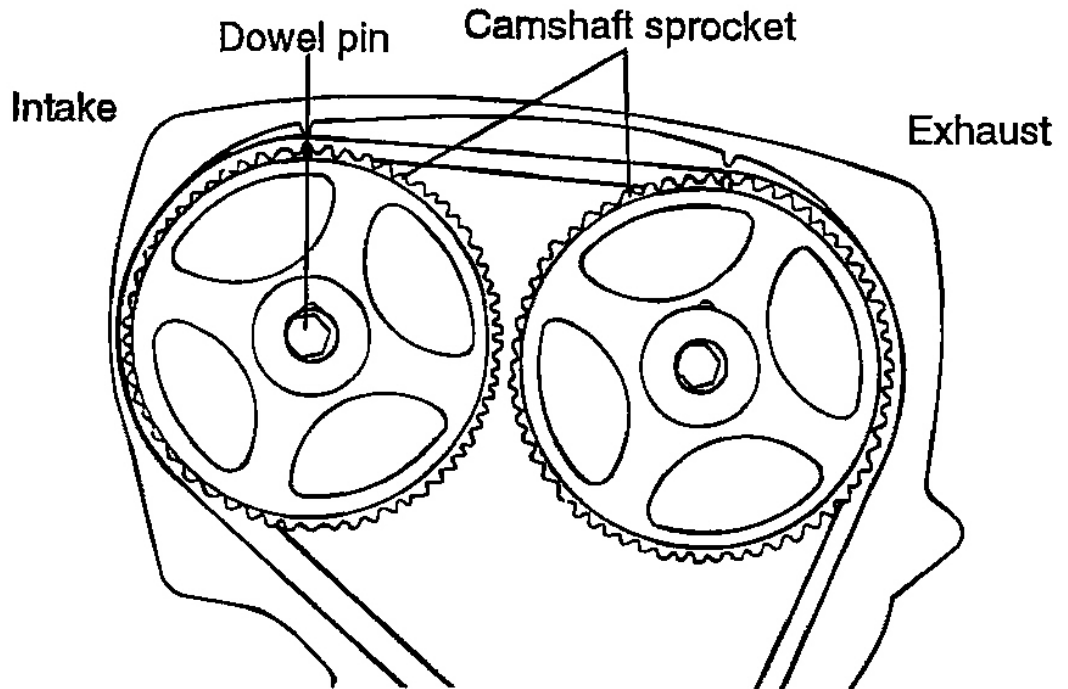

G00790159

Fig. 198: Identifying Dowel Pin & Camshaft Timing Marks
Courtesy of HYUNDAI MOTOR CO.

3. When exhaust and intake camshaft sprocket is used and install it after checking I.D mark depending on the engine debasement.

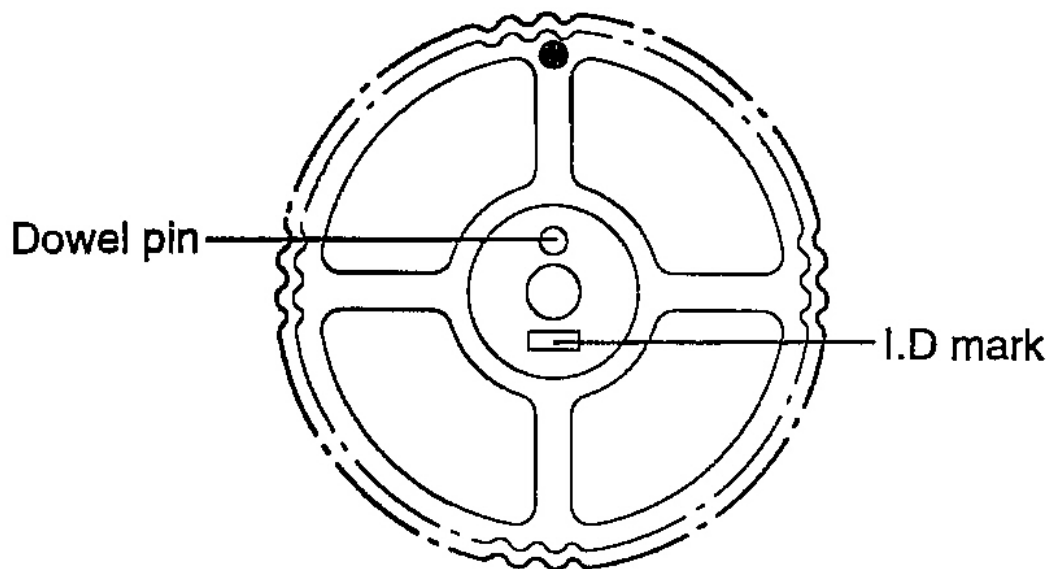


G00790160

Fig. 199: Identifying Camshaft Sprocket I.D. Mark
Courtesy of HYUNDAI MOTOR CO.

17. Align the timing mark on each sprocket with the corresponding timing mark and install the belt as the following order.

Crankshaft sprocket - Oil pump sprocket - Idler pulley - Exhaust camshaft sprocket - Intake camshaft sprocket Tensioner pulley

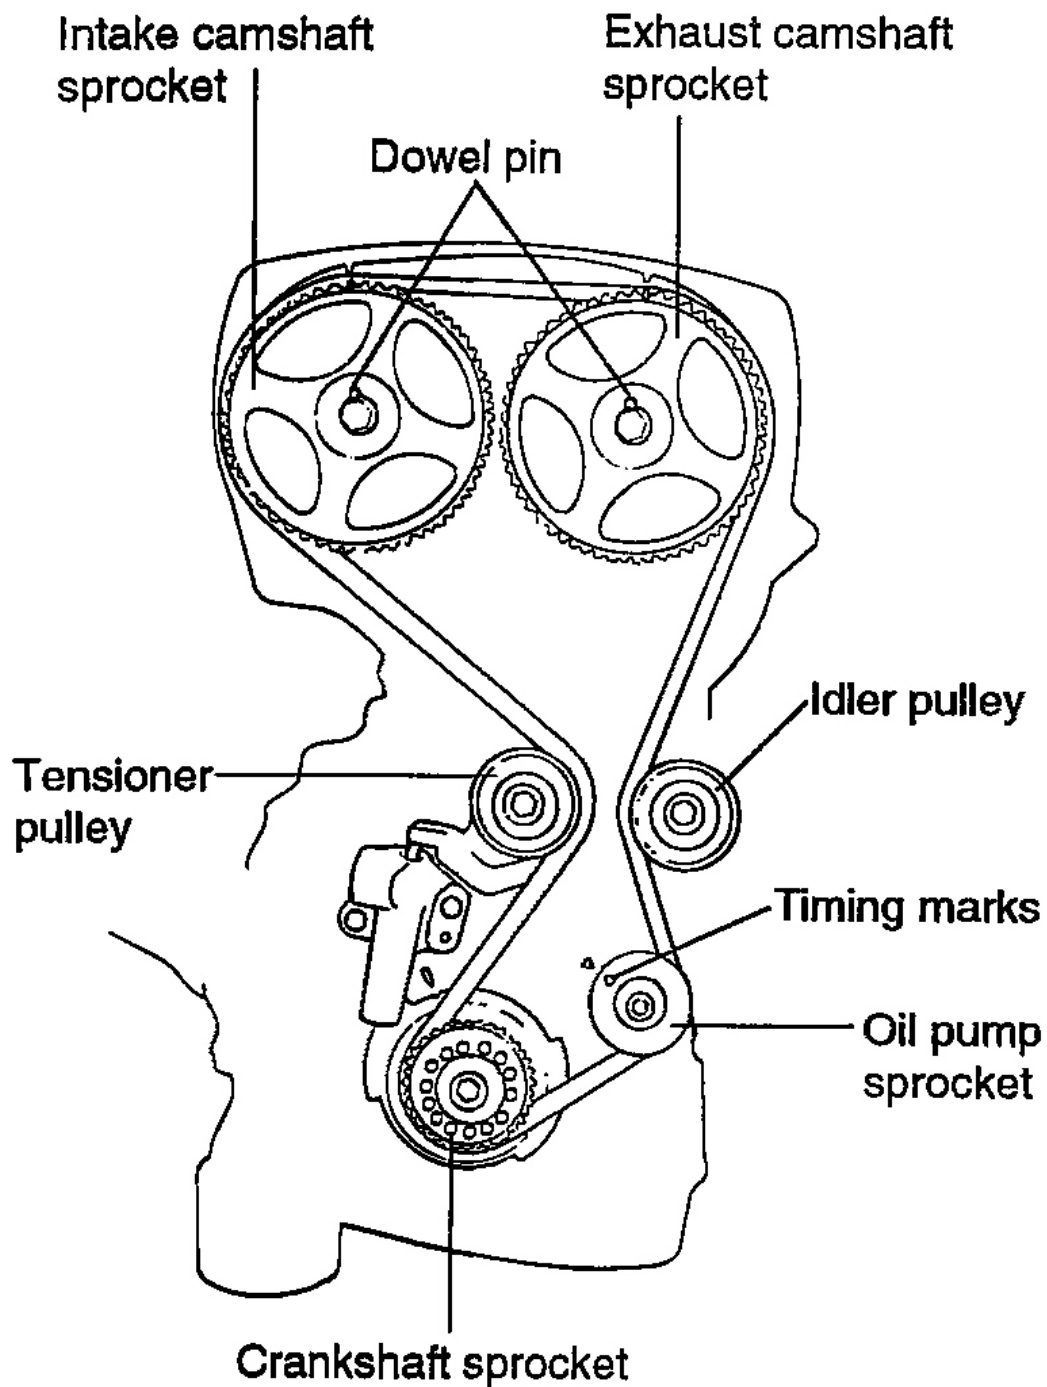


G00790161

Fig. 200: Identifying Timing Belt & Pulleys
Courtesy of HYUNDAI MOTOR CO.

NOTE:

1. Be sure that the piston of No. 1 cylinder is located in TDC position (Compression stroke).
2. When aligning the timing mark on oil pump sprocket, remove the left plug of cylinder block, and then check that the count balance shaft is in the specified position by inserting the screwdriver (Diameter : 8 mm, inserting length : 60 mm or more)

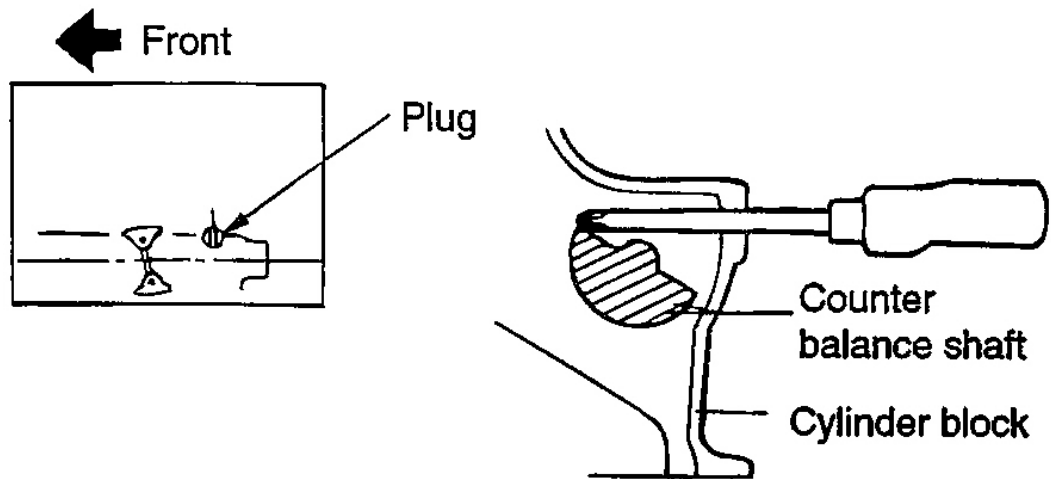

G00790162

Fig. 201: Checking Counter Balance Shaft Position
Courtesy of HYUNDAI MOTOR CO.


3. After checking the timing mark, install the left plug of cylinder block.

Tightening torque : 2.7 - 3.4 kgf.m

(Apply the liquid gasket : THREE BOND NO. 1212B or equivalent)

18. Pull out the set pin.
19. Rotate the crankshaft two turns clockwise and leave it for about 5 minutes. Then, measure the auto tensioner protrusion "A" (Distance between the tensioner arm and auto tensioner body) to ensure that it is within the specification.


Standard value : 5.5-9 mm (0.22 - 0.35 in)

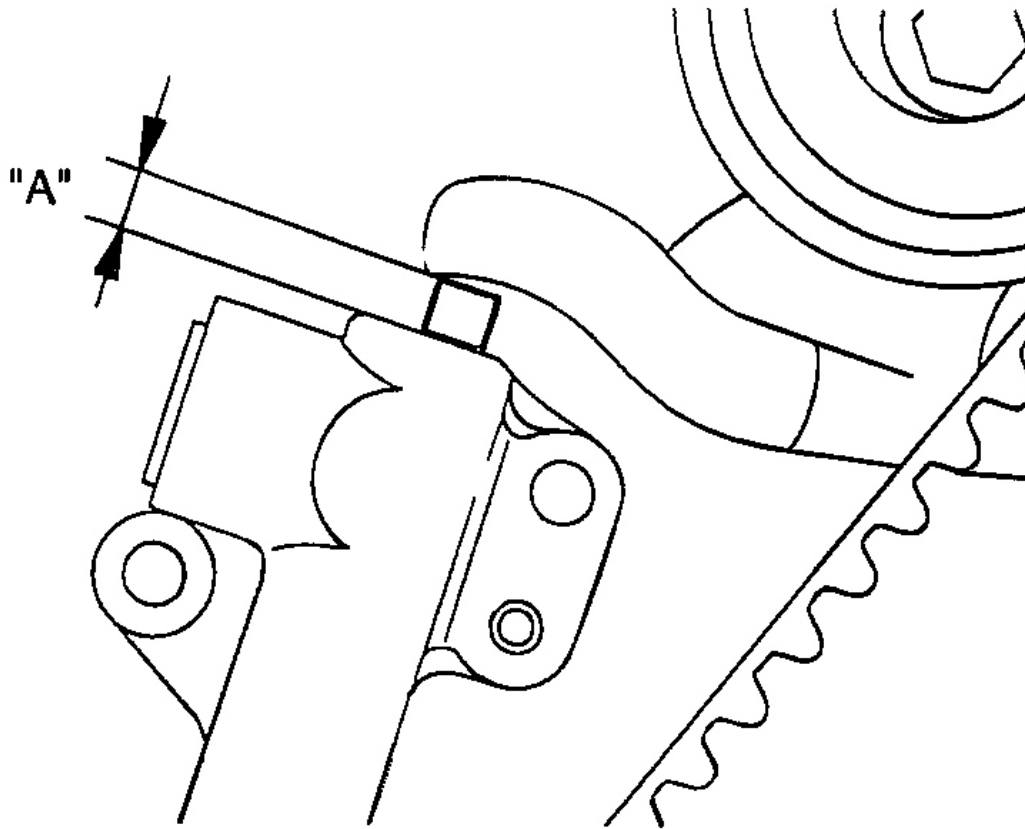

G00790163

Fig. 202: Measuring Auto Tensioner Protrusion
Courtesy of HYUNDAI MOTOR CO.

20. Install the timing belt lower cover and the timing belt upper cover.

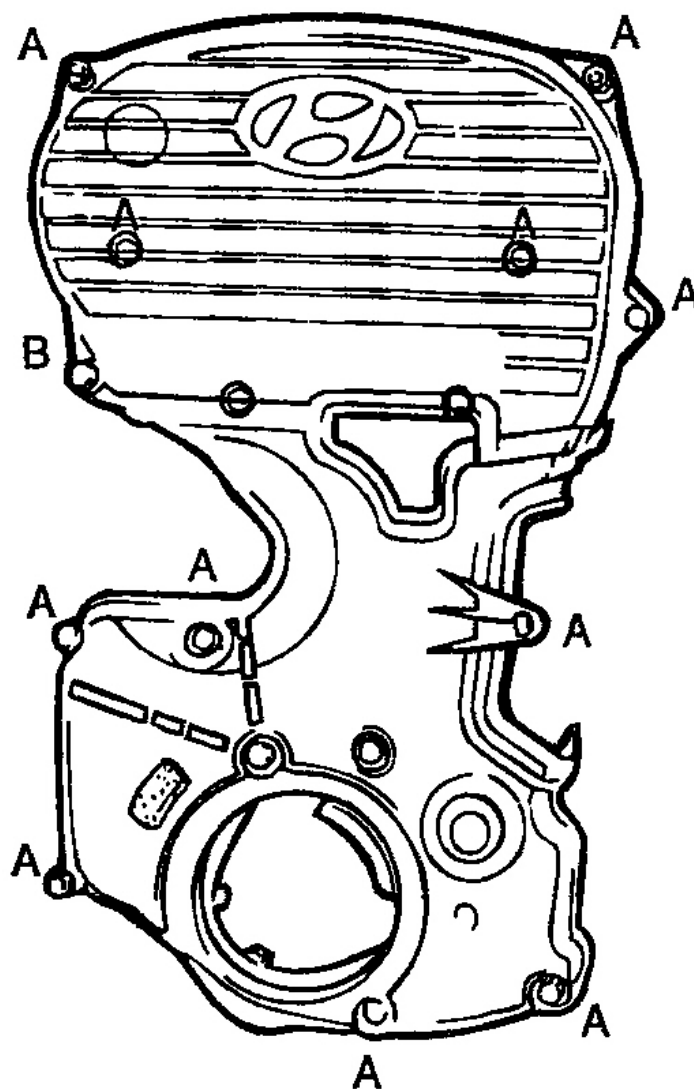

A:8-10 N.m (80-100 kg.cm, 6-7 lb.ft)

B:10-12 N.m (100-120 kg.cm, 7-9 lb.ft)

G00790164

Fig. 203: Identifying Timing Belt Cover Bolts
Courtesy of HYUNDAI MOTOR CO.